

In-band Full Duplex Radios and System Performance

❖ **Date:** 2015-01-12

Authors:

Name	Affiliations	Address	Phone	email
Kapseok Chang	ETRI	218 Gajeong-ro, Yuseong-gu, Daejeon 305-700, Korea		kschang@etri.re.kr
Hyungsik Ju	ETRI	"		jugun@etri.re.kr
Seon-Ae Kim	ETRI	"		sun0811@etri.re.kr
Byung-Jae Kwak	ETRI	"		bjkwak@etri.re.kr
Moon-Sik Lee	ETRI	"		moonsiklee@etri.re.kr
Jimin Bae	KAIST	291 Daehak-ro, Yuseong-gu, Daejeon 305-338, Korea		jimin1203@kaist.ac.kr
Eunhye Park	KAIST	"		eunhyepark@kaist.ac.kr
Youngnam Han	KAIST	"		ynhan@kaist.ac.kr
Woojin Ahn	Yonsei University			woozas@yonsei.ac.kr
Ronny Yongho Kim	Korea National University of Transportation			ronnykim@ut.ac.kr

Outline

❖ Feasibility of In-band Full Duplex (IFD)

- Concept
- Merit
- Demerit
- Classification of self-interference cancellation (SIC) Technology
- State of the art in SIC

❖ System Performance


- Introduction
- Duplex mode
 - TDD
 - 3-node form IFD
 - Pairwise IFD
- Residential scenario
 - System-level simulation environment
 - Evaluation result
- Outdoor large BSS scenario
 - System-level simulation environment
 - Evaluation result

❖ Summary

Feasibility of In-band Full Duplex (IFD)

What are current wireless radios?


- ❖ **Frequency Division Duplexing (FDD)**
 - In other words, Out-band Full Duplex (OFD)
- ❖ **Time Division Duplexing (TDD)**
 - In other words, In-band Half Duplex (IHD)

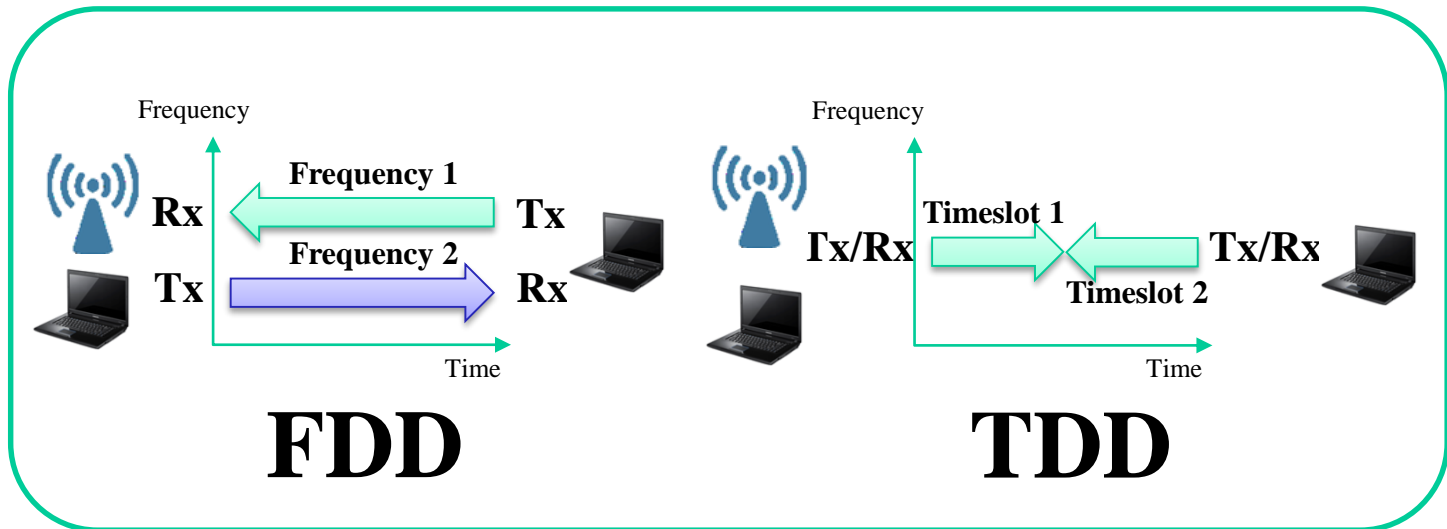

- ❖ **Problem**
 - There is no full resource utilization.
 - FDD wastes frequency resource, i.e. Frequency 2.
 - TDD wastes time resource, i.e. Timeslot 2.
- ❖ **What is one of solutions to resolve the problem?**
 - That is “In-band Full Duplex (IFD)”.

Concept of IFD


- ❖ IFD radio can simultaneously transmit and receive on the same frequency channel

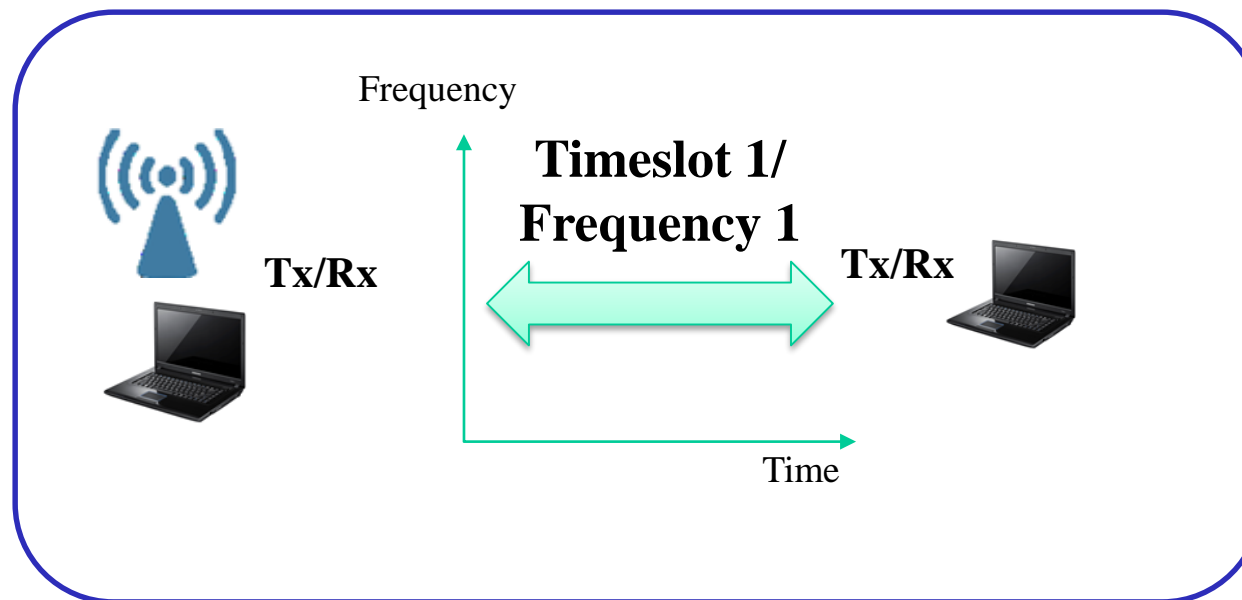

- IFD does not waste frequency and time resources, i.e. Frequency 2 and Timeslot 2.

Merit: Spectral Efficiency

❖ Basic operating scenario of bi-directional IFD communications with single antenna

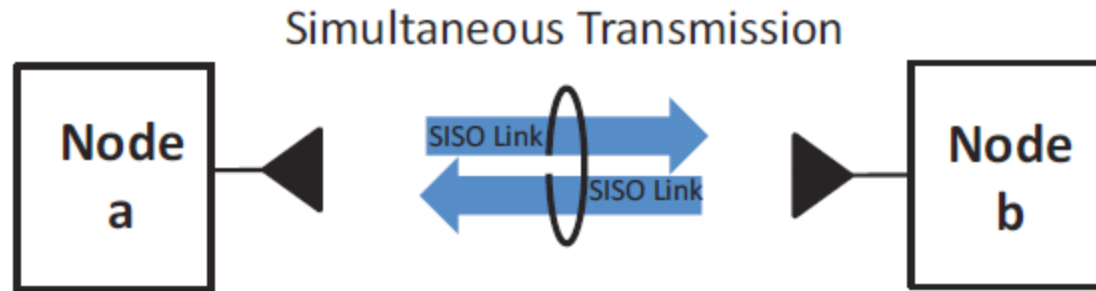

● Theoretical Ergodic capacities of ideal IFD and OFD/IHD

$$\text{➤ } C_{IFD} = \mathbf{1} \times C_{ab}^{(1 \times 1)} + \mathbf{1} \times C_{ba}^{(1 \times 1)}$$


$$\text{➤ } C_{OFD/IHD} = \frac{1}{2} \times C_{ab}^{(1 \times 1)} + \frac{1}{2} \times C_{ba}^{(1 \times 1)}, \text{ where } C_{xy}^{(1 \times 1)} = \log_2 \left(1 + SNR_{xy}^{(1 \times 1)} \right)$$

➤ The link capacity of IFD is **double** than that of OFD/IHD.

Demerit: Self-Interference

❖ Basic transceiver structure


- Self-interference (i.e. self transmitted signal) is generated as below.

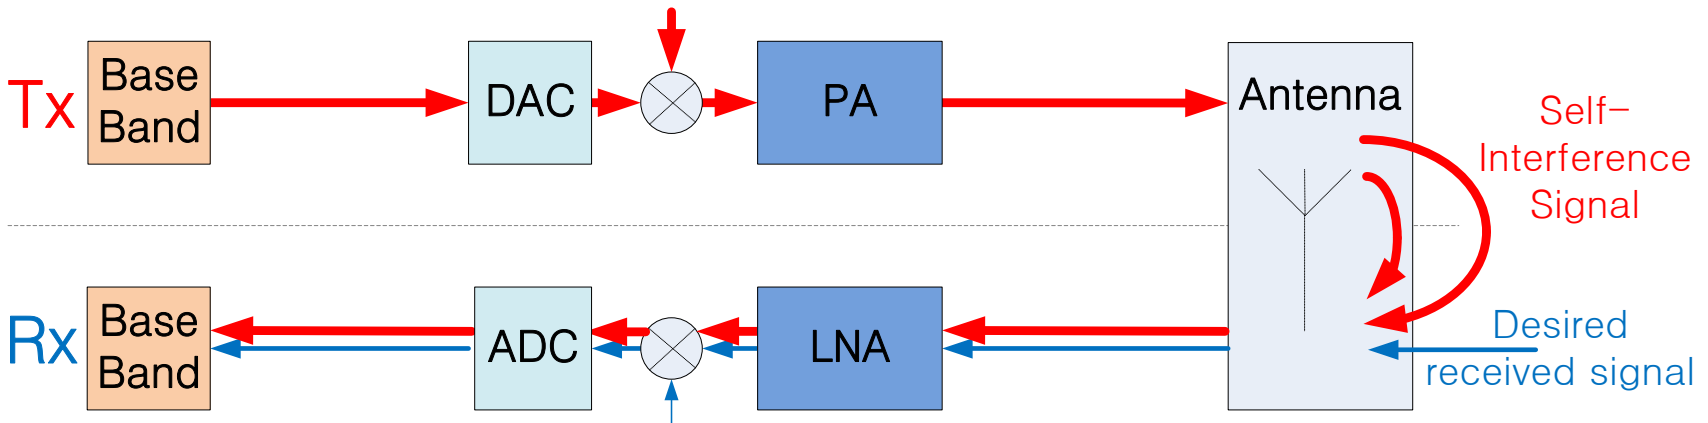

- Very strong self-interference signal ^[1]
 - **~110dB stronger than desired received signal strength for IEEE 802.11 Wi-Fi and LTE-A Small Cell**


Demerit: Co-Channel Interference

- ❖ **Operating scenario of IFD capable AP supporting IHD capable user nodes** [2][3]
 - It can be a priority for AP only to have IFD capability in terms of power supplying and backward compatibility.

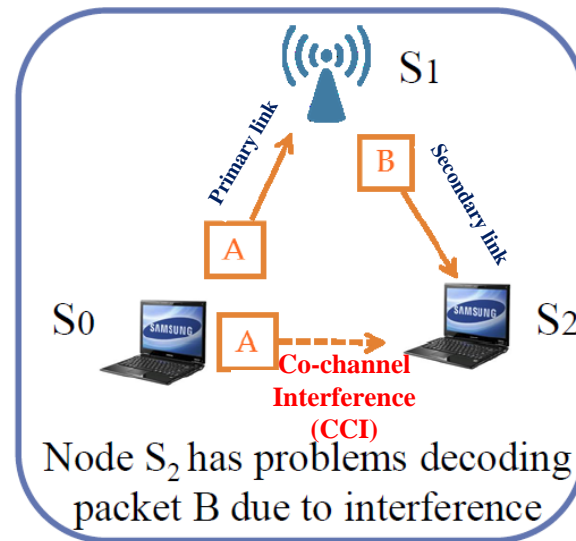

- Co-channel interference (CCI) occurs.
- Requires further information (e.g. CCI) to setup the secondary link

Classification of Self-Interference Cancellation (SIC) Technology

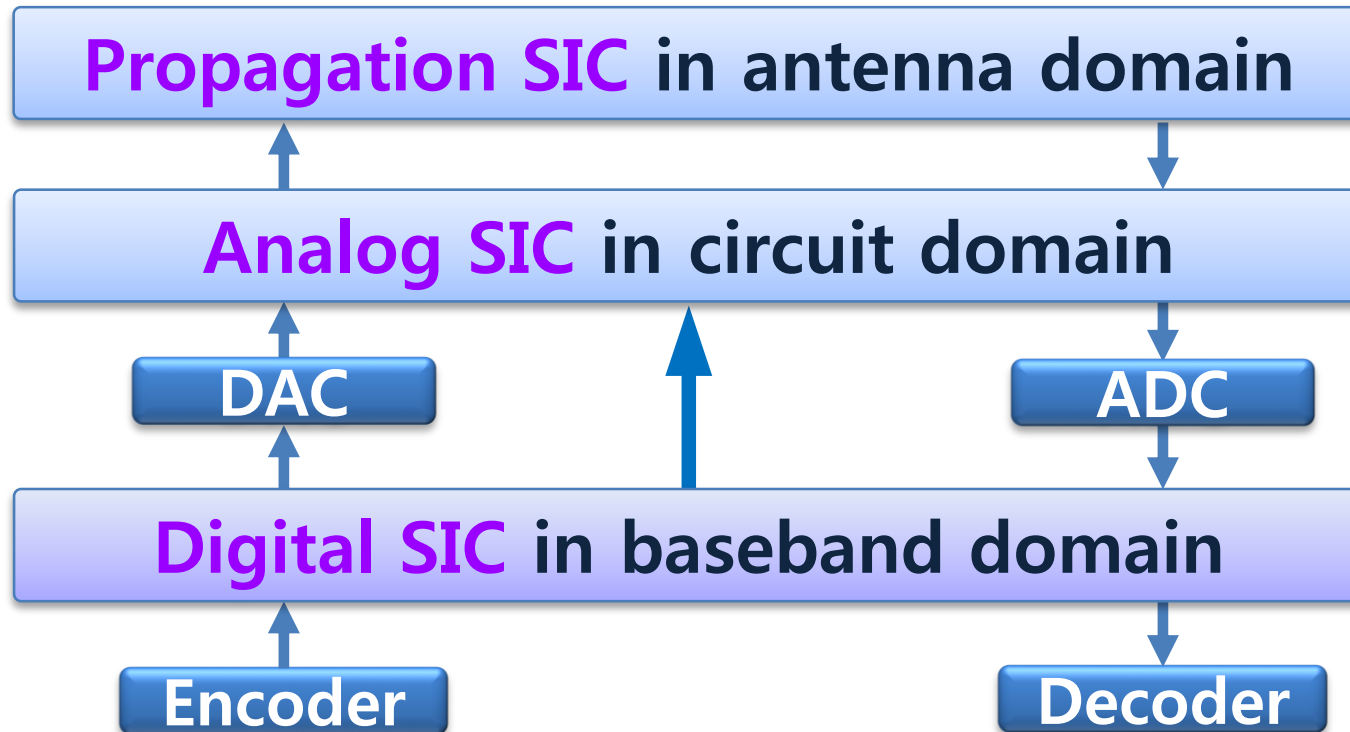

Key Issues on SIC

❖ Inefficiency of propagation SIC (PSIC)

- Mainly using physical isolation between Tx and Rx antennas [4]
 - **Any propagation SIC technologies are not recommended because**
 - the merit of IFD in terms of spectral efficiency over OFD/IHD disappears
 - The form-factor size of IFD transceiver becomes larger.
 - **Thus, single antenna is recommended to realize the merit of spectral efficiency**
 - That is to say, no propagation SIC gain in antenna domain


❖ Importance of analog SIC (ASIC)

- Protecting analog-to-digital converter (ADC) saturation
- Analog SIC technology is the crux of IFD commercialization.

❖ Non-linear component in digital SIC (DSIC)

- Dependent on surrounding environment of IFD transceiver, non-linear component self-interference signal cannot be sufficiently cancelled in analog domain. In this case, there is no successful decoding without this component cancellation.

State of the art in SIC [2]

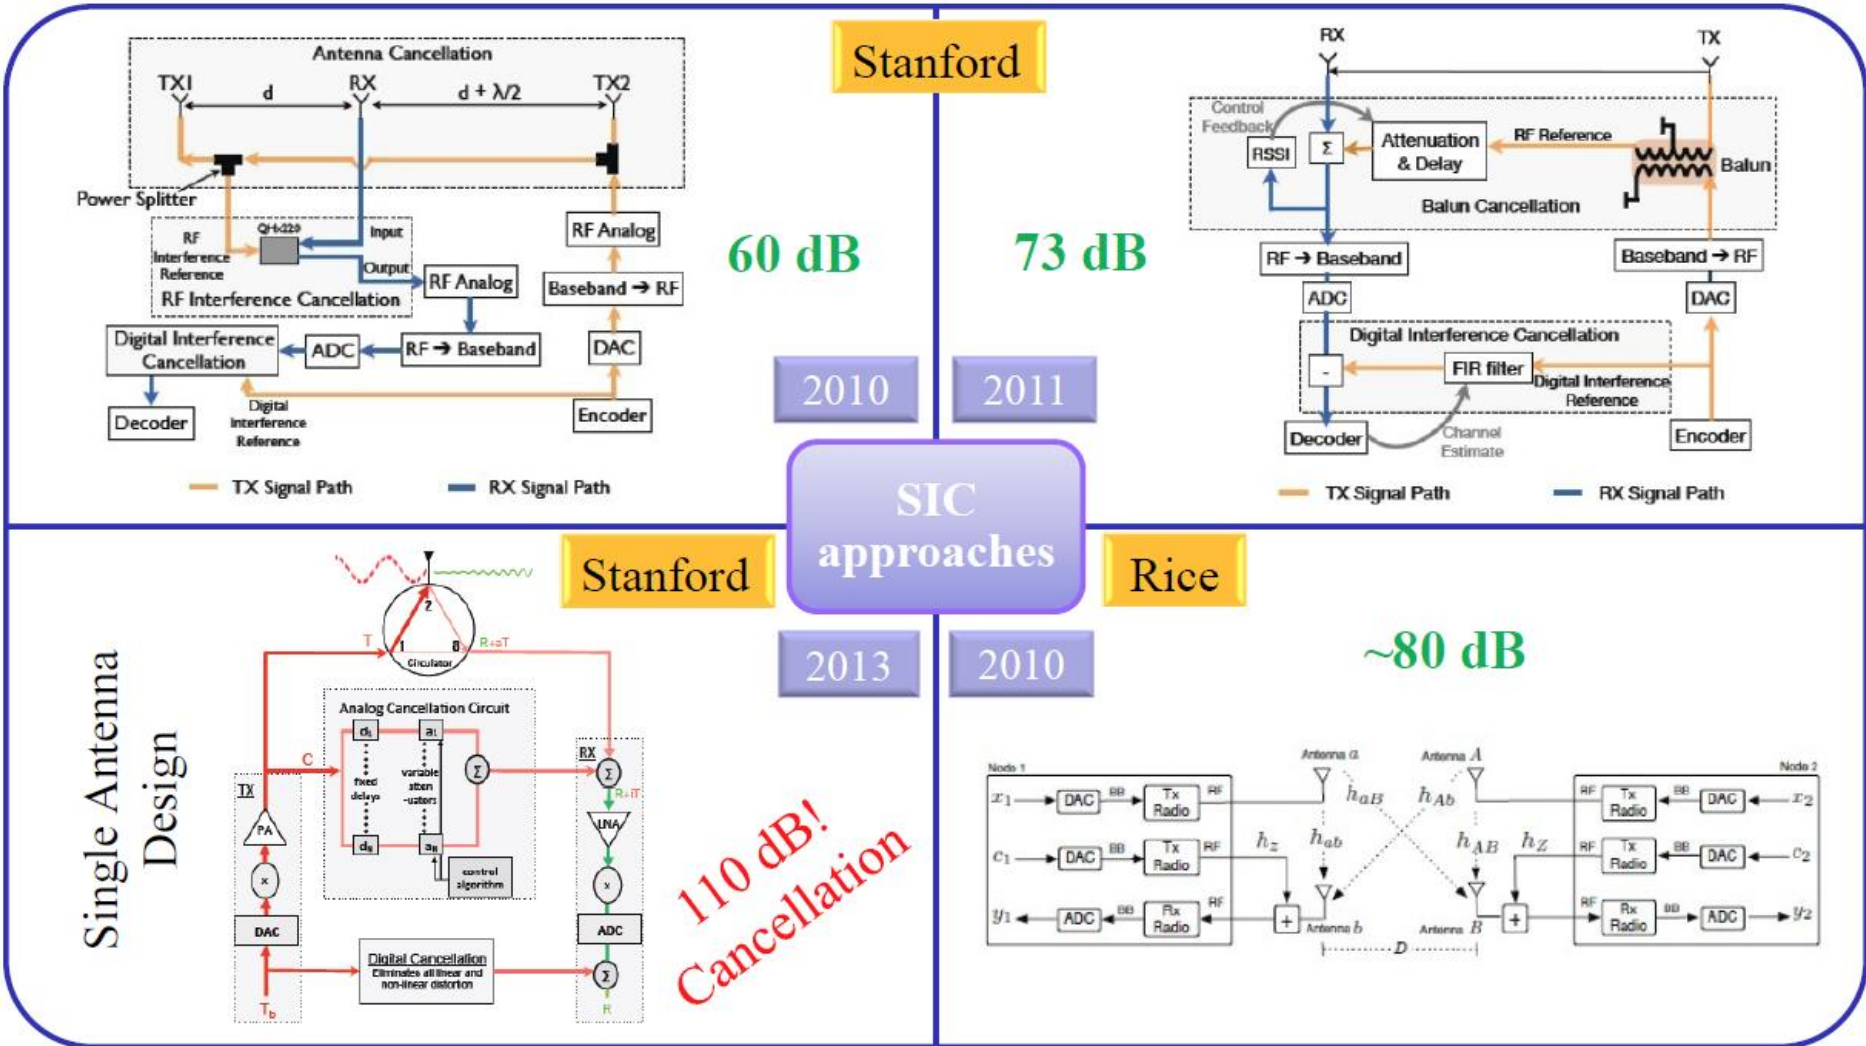

State-of-the-art SIC Performance Comparison

Institute	Year (Standard)	Freq. (GHz)	BW (MHz)	PSIC	ASIC	DSIC	Total SIC
NEC (Japan)	2011	5	10	55dB	none	20dB	75dB
Rice University (US)	2011	2.4	10	57dB	24dB	none	81dB
	2012	2.4	20	65dB	20dB		85dB
	2012	2.4	20	71dB	24dB		95dB
Stanford University Kumu networks ^[1] (US)	2010	2.48	5	30dB	25dB	15dB	70dB
	2011	2.4	10		45dB	28dB	73dB
	2013	2.4	80	none	60dB	50dB	110dB
DUPLO ^[6]	2014	2.45	6	none	50dB		
RF Window (Korea)	LTE WCDMA	2	20	60dB	none	10dB	70dB
WITHUS (Korea)	LTE WCDMA	2	10	35dB	none	35dB	70dB
AirPoint (Korea)	LTE TDD	2.2		55dB	none	35dB	90dB
SOLiD (Korea)		2		65dB	none	35dB	100dB

ETRI View and Result on SIC

❖ Propagation SIC

- No need to achieve double spectral efficiency, that is, single shared antenna

❖ Analog SIC


- Supporting wide bandwidth e.g. 100MHz
- Achieving at least **stable 80dB SIC** to reduce quantization error in digital domain
 - RF analog FIR filter is needed

❖ Digital SIC

- Designing **residual nonlinear component SIC** as well as linear-component SIC for successful decoding

❖ Result based on S/W simulator

- Condition
 - Single antenna, Circulator/Antenna channel modelling, Low Pass Filter modelling, nonlinear amplifier modelling
 - No consideration in other hardware impairments
- We see more than 110dB SIC with our SIC technologies. See the right figure.

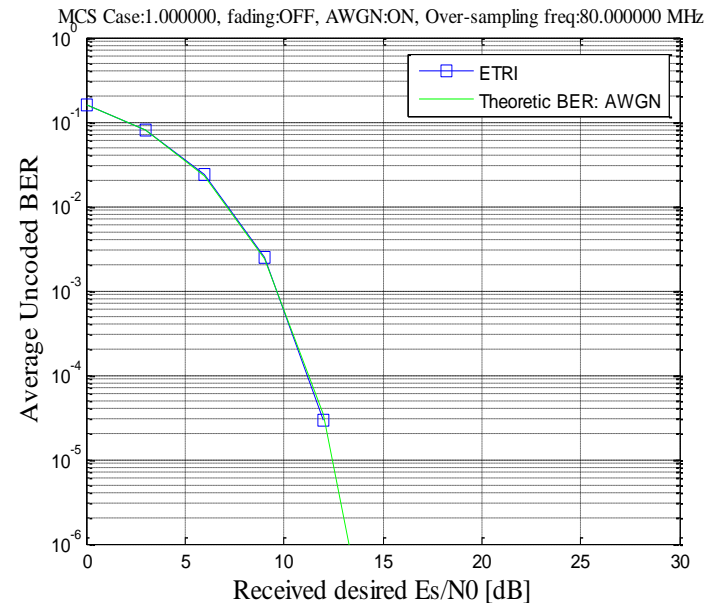

System Performance and Summary


Introduction

❖ IFD with single antenna is coming

- Feasibility of IFD communication now proved [1]
- ***Dream of simultaneous transmission and reception (STR) coming true!!***

❖ When IFD is employed in wireless communication networks,

- Up to **2x spectral efficiency**
- **Advanced MAC protocols to resolve various problems in half duplex (HD) counterparts**




- **Self-Interference**
- **Increased co-channel interference (CCI) by STR**


❖ Performance IFD-based wireless communication networks by system level simulation (SLS)

Duplex Mode – TDD

DL mode

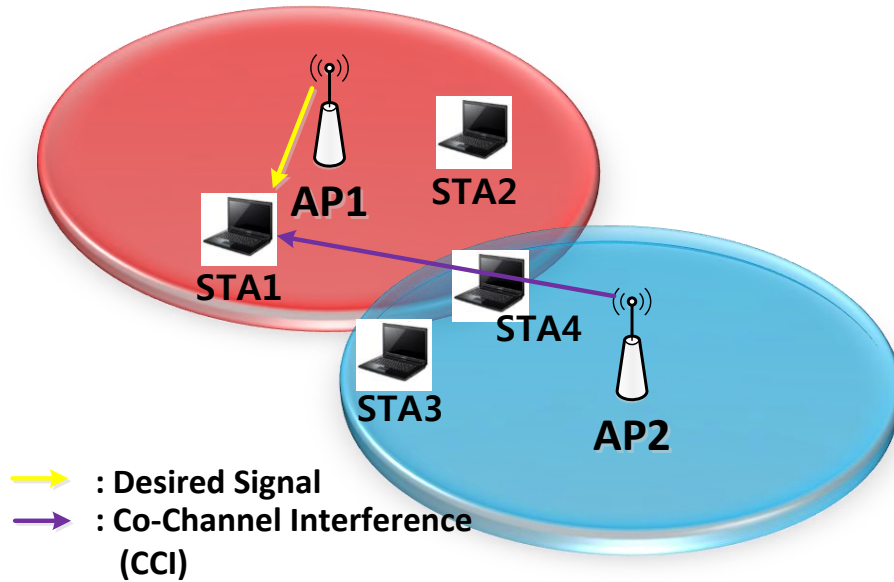


UL mode

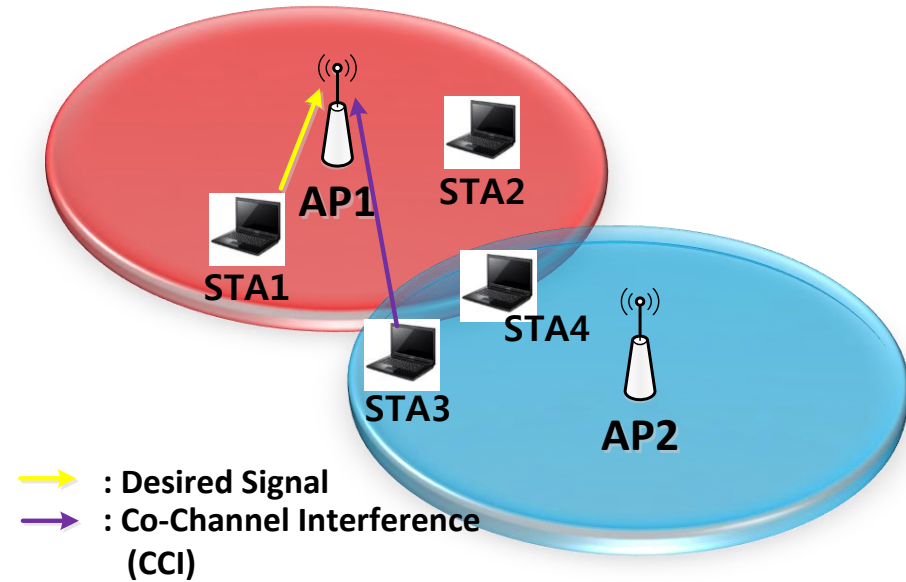


Duplex Mode – 3 Node Form IFD (3n-IFD) [2][3]

DL mode

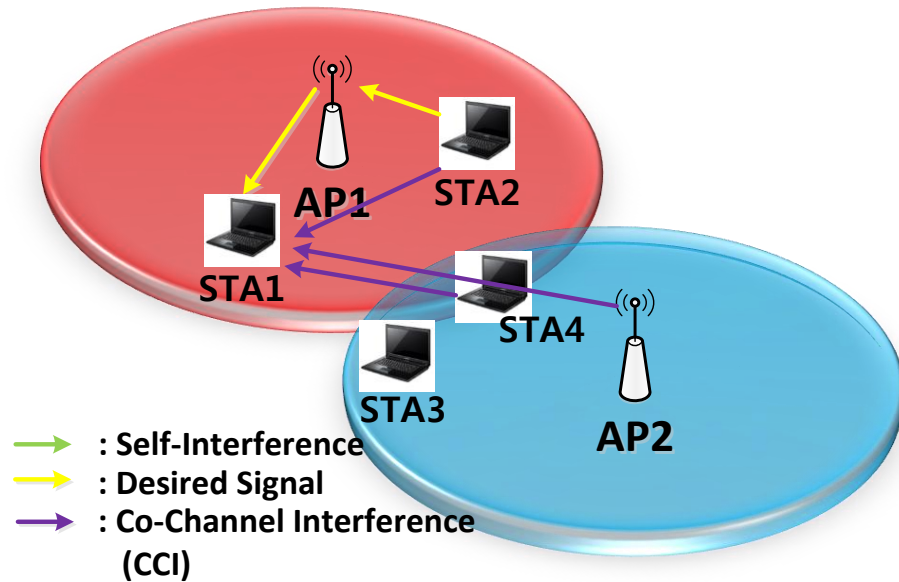


UL mode

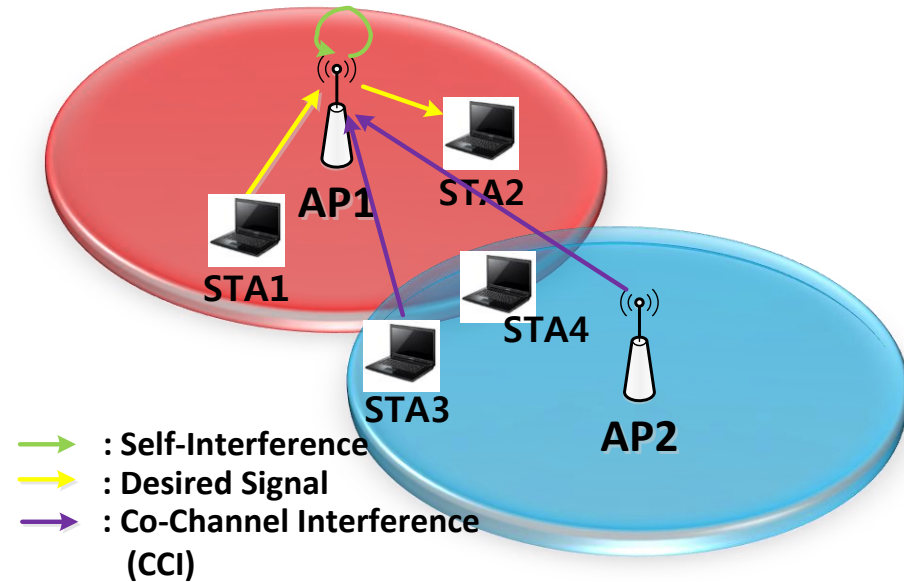


Duplex Mode – Pairwise IFD [2][3]

DL mode

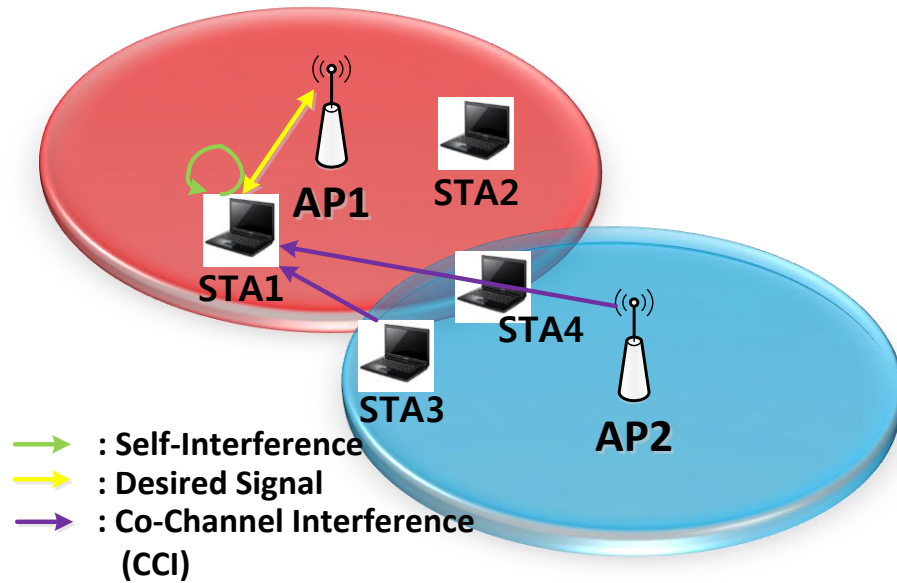


UL mode

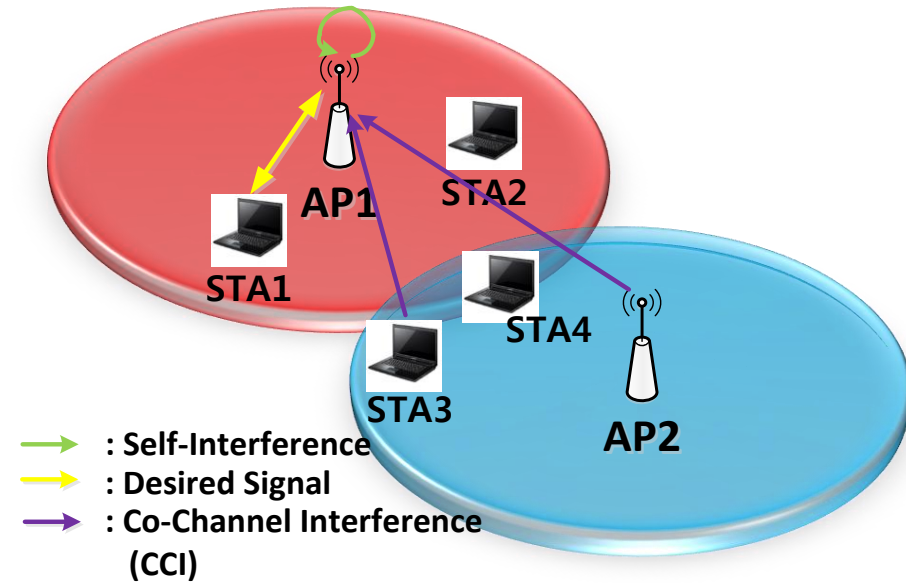

Residential Scenario

❖ SLS Environment [5]


- Residential building layout
 - 5 floors, 3m height / floor
 - 2×10 apartments / floor
 - Apartment size : 10m×10m×3m
- Parameter
 - 100 APs in the building (1 AP / room)
 - 2 STAs / room
 - Carrier frequency : 2.4GHz
 - Bandwidth : 20MHz
 - Noise Figure : 7dB
 - TDD mode
 - AP: 2 Tx and 2 Rx antennas
 - STA: 1 Tx and 1 Rx antennas
 - IFD mode
 - AP: 2 shared antennas
 - STA: 1 shared antenna

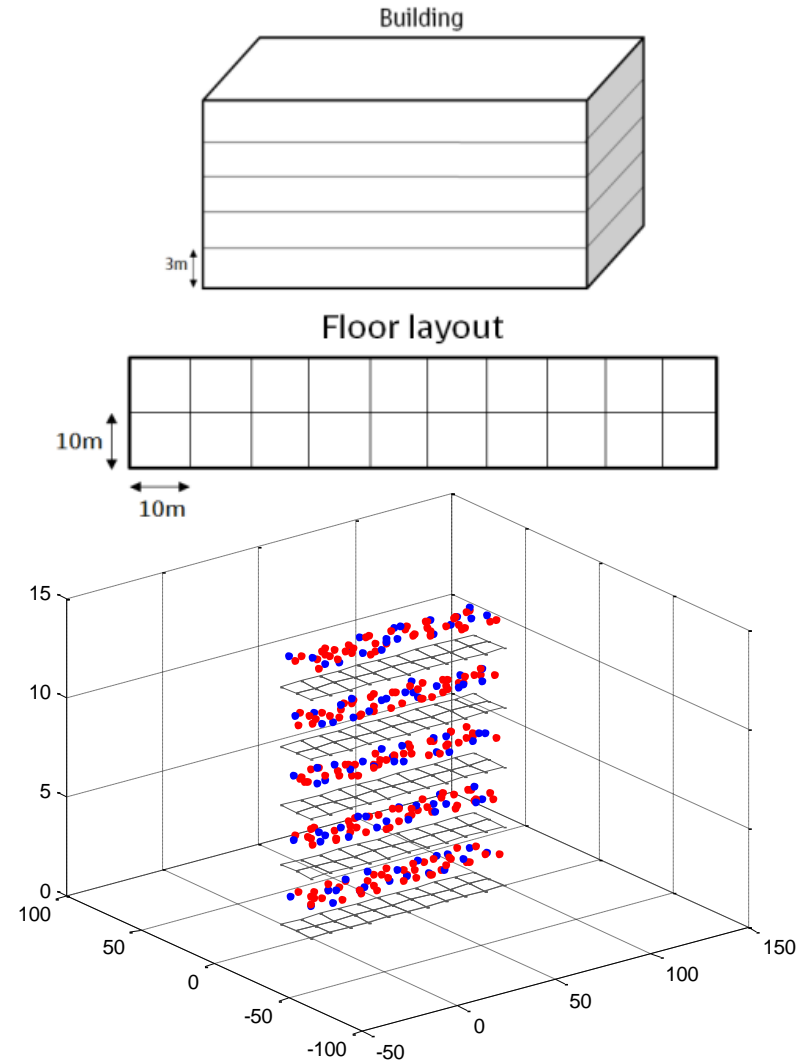

Residential Scenario

❖ SLS Environment (Contd.)

- General P-IFD mode
 - **AP** : random deployment in room (uniform)
 - **STA** : random deployment in room (uniform)
- Space-Scheduled (SSC) P-IFD & 3n-IFD mode
 - **AP** : random deployment in room (uniform)
 - **STA**
 - Random deployment in room (uniform)
 - minimum distance between STAs is 2m
 - minimum distance between AP and STA is x m

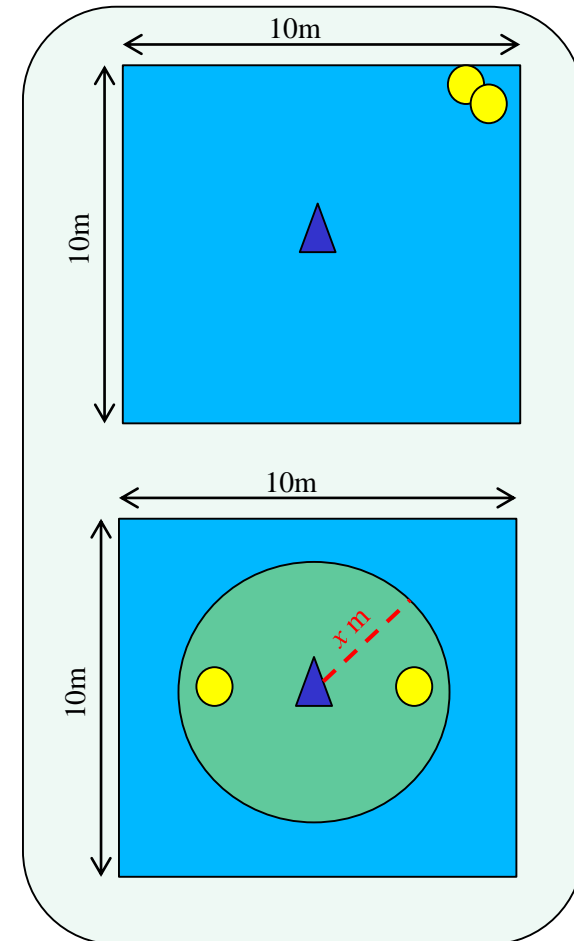

Residential Scenario


❖ Evaluation Result (1)

- Effect of CCI

Signal power 20dBm


-42dB

Noise level -90dBm

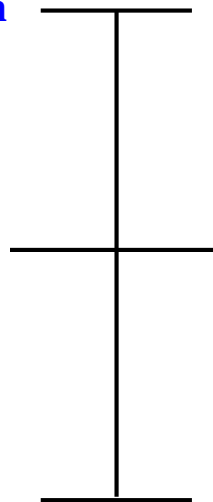

300dB SIC
= CCI only



- It means in this CCI level, the achievable throughput with 80dB SIC case is close to that with perfect SIC case.

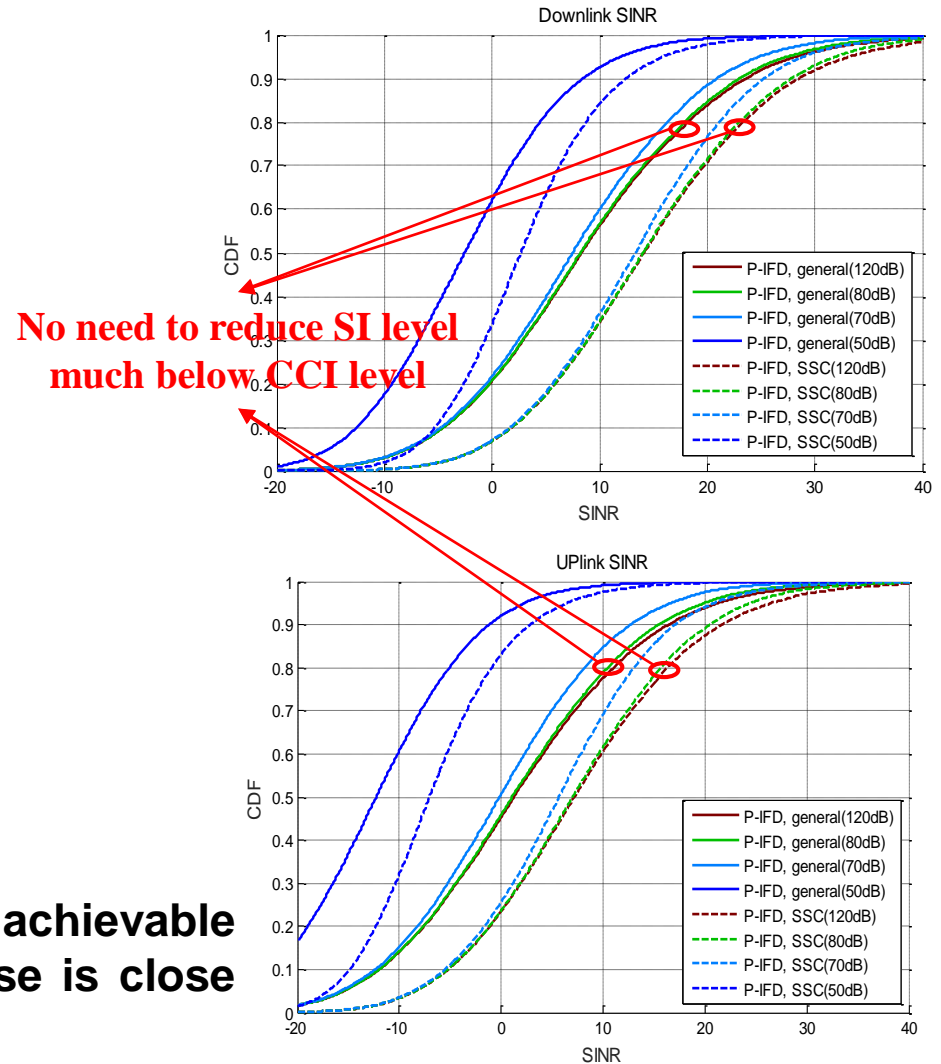

Residential Scenario

❖ Evaluation Result (2)

● Throughput

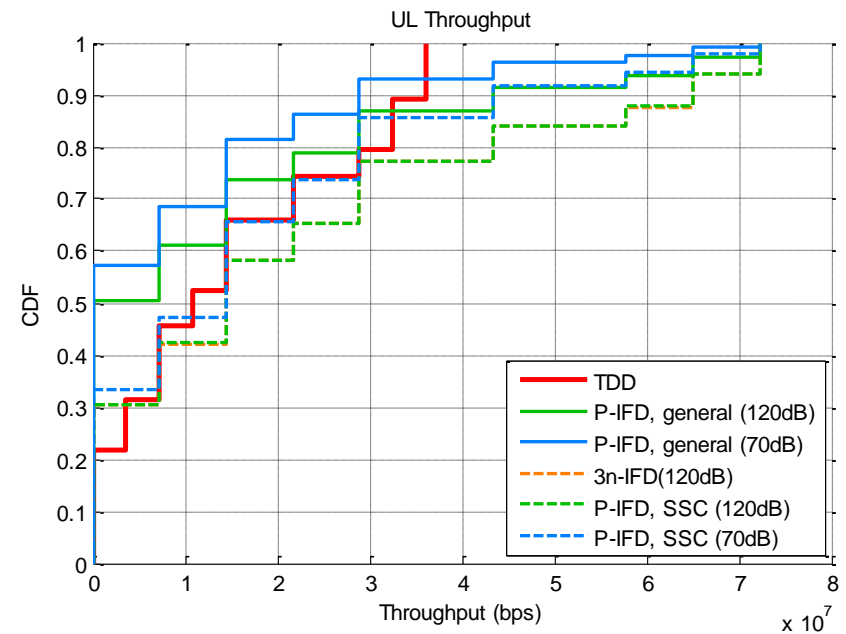
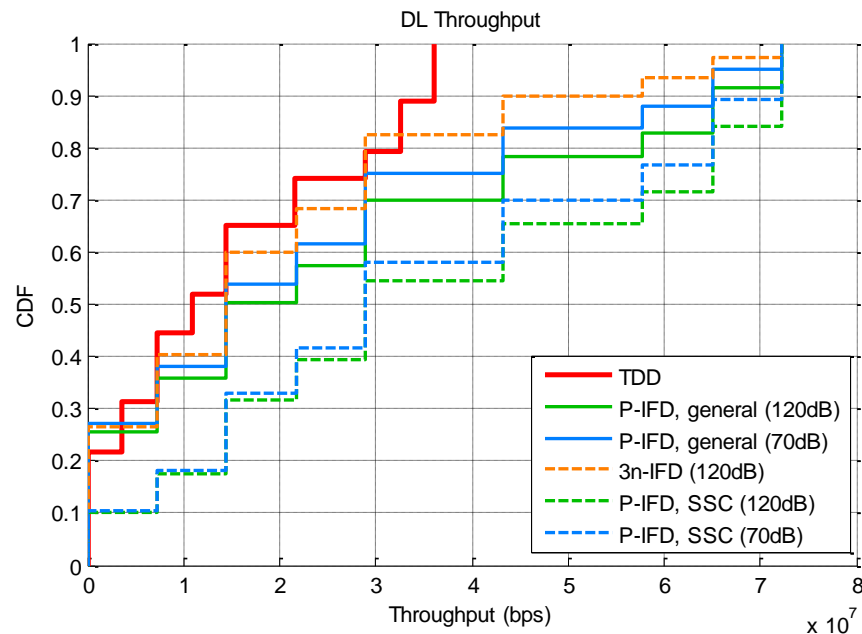


- Max. throughput of IFD $\approx 2 \times$ max. throughput of TDD.
- SSC is effective to enhance throughput of IFD.

Residential Scenario

❖ Evaluation Result (3)

● Areal Throughput

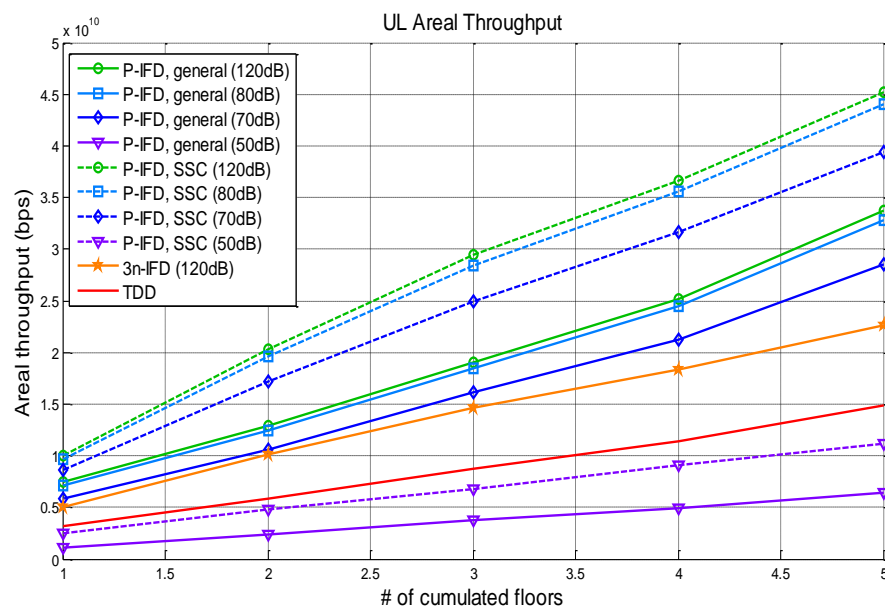
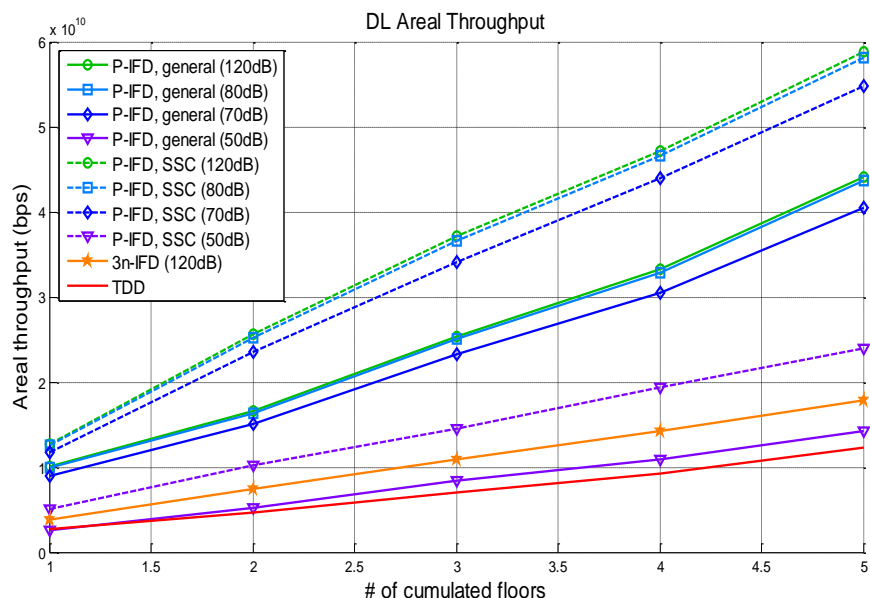


- **50% enhancement** of areal throughput by **3n-IFD** with sufficient SIC
- **300% enhancement** of areal throughput by **P-IFD** with sufficient SIC
- Noticeable areal throughput enhancement by **SSC**

Outdoor Large BSS Scenario

❖ SLS Environment [5]


- BSSs' layout
 - 19 hexagonal grids of cells
 - Inter cell distance (ICD) = 130m
- Location
 - 1 AP at the center of each cell
 - 2 randomly distributed STAs / cell
 - Heights: $h_{AP}=10\text{m}$, $h_{STA}=1.5\text{m}$
- Parameter
 - Carrier Frequency : 2.4GHz
 - Bandwidth : 20MHz
 - Noise Figure : 7dB
 - TDD mode
 - AP: 2 Tx and 2 Rx antennas
 - STA: 1 Tx and 1 Rx antennas
 - IFD mode
 - AP: 2 shared antennas
 - STA: 1 shared antenna

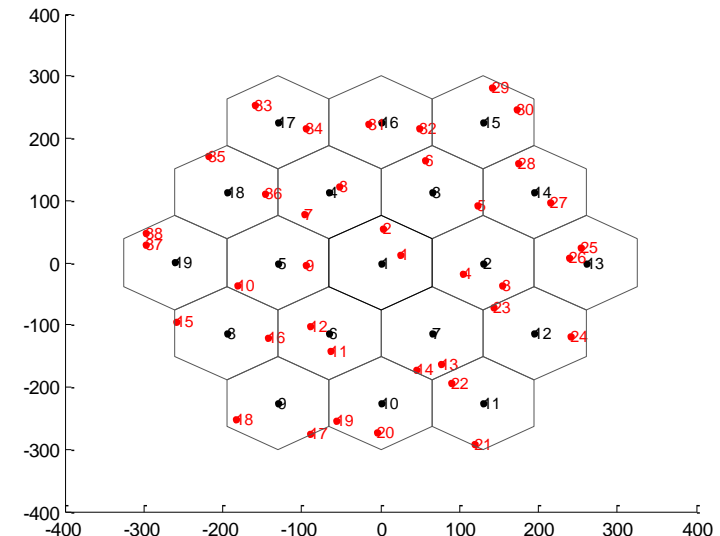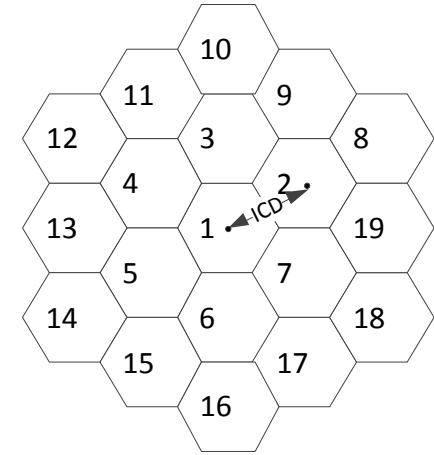

Outdoor Large BSS Scenario

❖ SLS Environment (Contd.)



- General P-IFD
 - Random deployment (uniform)
 - Minimum distance b/w AP & STA : 10m
 - Minimum distance b/w STAs : 10m
- SSC P-IFD
 - Random deployment (uniform)
 - Distance b/w AP & STA: 10 m ~ y m
 - Minimum distance b/w STAs : 10m
- SSC 3n-IFD
 - Random deployment (uniform)
 - Odd STA : random deployment within boundary
 - Even STA : reflection of odd STA
 - Distance b/w AP & STA: 10 m ~ y m

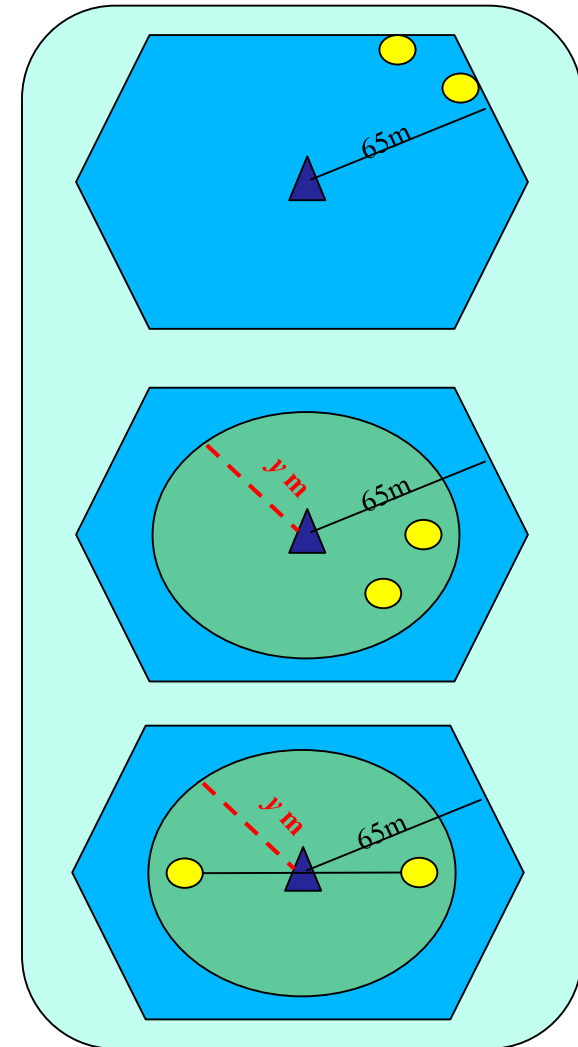

Outdoor Large BSS Scenario

❖ Evaluation Result (1)

● Throughput

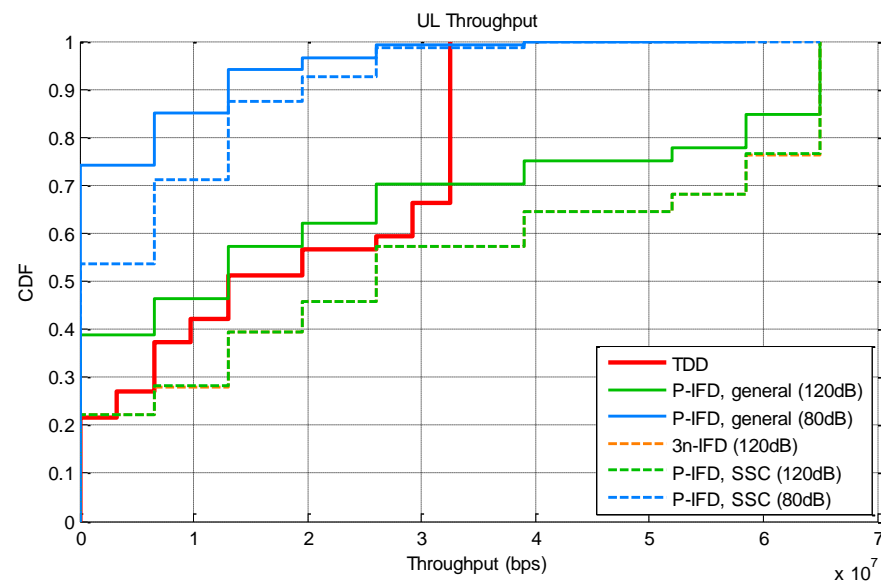
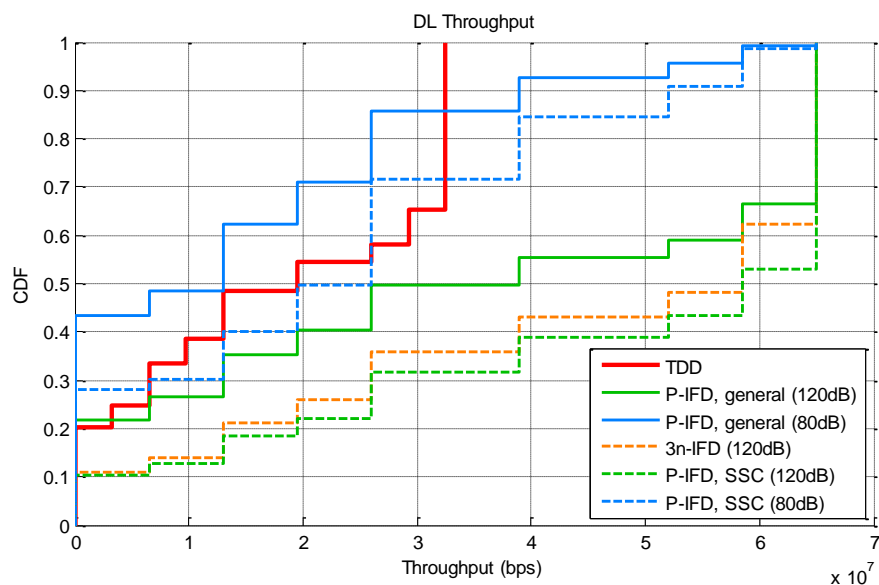


- Max. throughput of IFD $\approx 2 \times$ max. throughput of TDD.
- SSC is effective to enhance throughput of IFD in low SINR regime
- Even with SSC, SIC more than 80dB required

Outdoor Large BSS Scenario

❖ Evaluation Result (2)

● Areal throughput

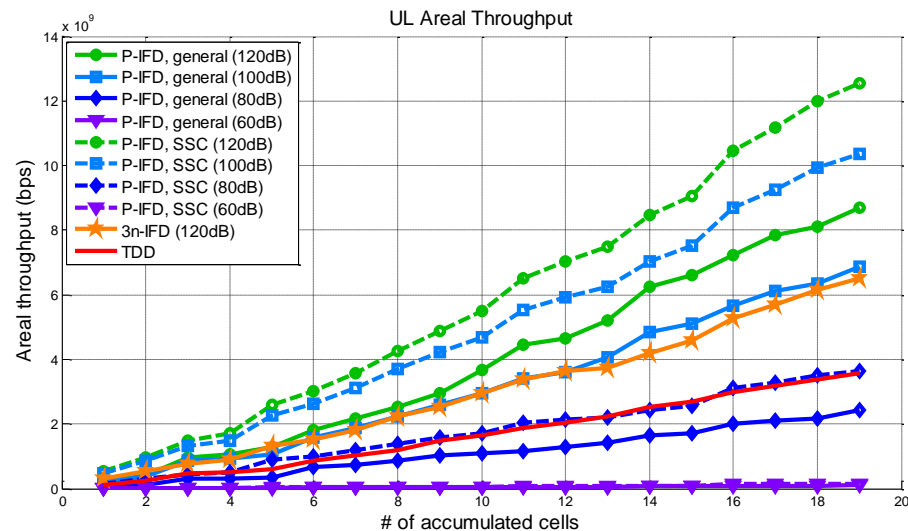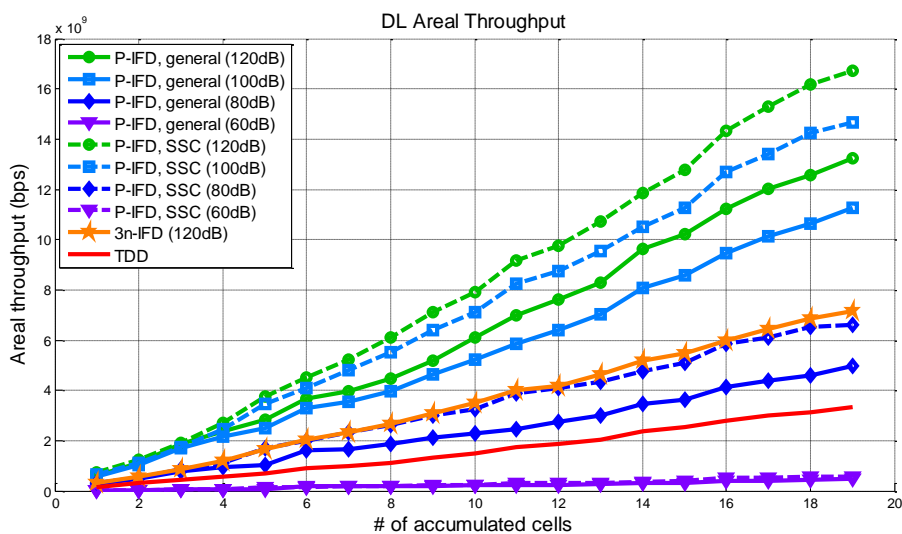

- **100%** areal throughput enhancement by **3n-IFD** with sufficient **SIC**
- **300%** areal throughput enhancement by **P-IFD** with sufficient **SIC**
- Noticeable areal throughput enhancement by **SSC**

Summary

- Simultaneous transmission and reception is **coming**.
- When deployed in Wi-Fi networks, the system throughput with **80dB SIC** case approached that with perfect SIC case (**indoors**).
- When STA density is low, **extra SIC** performance can further enhance the system throughput (**outdoors**).
- System level simulations show that with sufficient SIC performance, **IFD leads to severalfold throughput enhancements** compared to conventional half duplex counterpart.
- (Spatial) **scheduling plays a key role** to enhance performance of IFD-based Wi-Fi networks.
- If **4 times areal throughput enhancement** is desired, adopting IFD is one of answers.

References

1. IEEE 802.11-13/1421r1, “STR radios and STR media access.”
2. IEEE 802.11-13/1122r1, “Considerations for In-Band Simultaneous Transmit and Receive (STR) Feature in Hew”
3. IEEE 802.11-14/0838r0, “Discussion on Dual-Link STR in IEEE 802.11 ax”
4. E. Everett, A. Sahai, and A. Sabharwal, “Passive self-interference suppression for full-duplex infrastructure nodes,” IEEE Trans. Wireless Commun., vol. 13, no. 2, pp. 680-694, Feb. 2014.
5. IEEE 802.11-14/0980r4, “TGax Simulation Scenarios.”
6. DUPLO, ‘D4.1.1-Performance of full-duplex systems,’ <http://www.fp7-duplo.eu/index.php/>.

Appendix

MCS table

❖ Using IEEE 802.11n

- Spatial streams = 1
- Bandwidth = 20MHz
- Residential Scenario 400ns GI
- Outdoor Large BSS Scenario 800ns GI

MCS index	Modulation type	Coding rate	Data rate (Mbits/s)	
			800ns GI	400ns GI
0	BPSK	1/2	6.5	7.2
1	QPSK	1/2	13	14.4
2	QPSK	3/4	19.5	21.7
3	16-QAM	1/2	26	28.9
4	16-QAM	3/4	39	43.3
5	64-QAM	2/3	52	57.8
6	64-QAM	3/4	58.5	65
7	64-QAM	5/6	65	72.2



MCS Value Achieved by Clients at Various Signal to Noise Ratio Levels (SNR)

Protocol	Channel	1	2	3	4	5	6	7	8	9	10
802.11b	20MHz	None	None	None	MCS 0	MCS 0	MCS 1	MCS 1	MCS 1	MCS 1	MCS 1
802.11a/g	20MHz	None	MCS 0	MCS 0	MCS 1	MCS 2	MCS 2	MCS 2	MCS 2	MCS 3	MCS 3
802.11n	20MHz	None	MCS 0	MCS 0	MCS 0	MCS 1	MCS 1	MCS 1	MCS 1	MCS 2	MCS 2
802.11n	40MHz	None	None	None	None	MCS 0	MCS 0	MCS 0	MCS 1	MCS 1	MCS 1
802.11ac	20MHz	None	MCS 0	MCS 0	MCS 0	MCS 1	MCS 1	MCS 1	MCS 1	MCS 2	MCS 2
802.11ac	40MHz	None	None	None	None	MCS 0	MCS 0	MCS 0	MCS 1	MCS 1	MCS 1
802.11ac	80MHz	None	None	None	None	None	None	None	MCS 0	MCS 0	MCS 0
802.11ac	160MHz	None	None	None	None	None	None	None	None	None	None
SNR in dB		11	12	13	14	15	16	17	18	19	20
802.11b	20MHz	MCS 2	MCS 2	MCS 2	MCS 2	MCS 2	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3
802.11a/g	20MHz	MCS 4	MCS 4	MCS 4	MCS 4	MCS 5	MCS 5	MCS 5	MCS 6	MCS 6	MCS 7
802.11n	20MHz	MCS 3	MCS 3	MCS 3	MCS 3	MCS 4	MCS 4	MCS 4	MCS 5	MCS 5	MCS 6
802.11n	40MHz	MCS 1	MCS 2	MCS 2	MCS 3	MCS 3	MCS 3	MCS 3	MCS 4	MCS 4	MCS 4
802.11ac	20MHz	MCS 3	MCS 3	MCS 3	MCS 3	MCS 4	MCS 4	MCS 4	MCS 5	MCS 5	MCS 6
802.11ac	40MHz	MCS 1	MCS 2	MCS 2	MCS 3	MCS 3	MCS 3	MCS 3	MCS 4	MCS 4	MCS 4
802.11ac	80MHz	MCS 1	MCS 1	MCS 1	MCS 1	MCS 2	MCS 2	MCS 3	MCS 3	MCS 3	MCS 3
802.11ac	160MHz	MCS 0	MCS 0	MCS 0	MCS 1	MCS 1	MCS 1	MCS 1	MCS 2	MCS 2	MCS 3
SNR in dB		21	22	23	24	25	26	27	28	29	30
802.11b	20MHz	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3
802.11a/g	20MHz	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7
802.11n	20MHz	MCS 6	MCS 6	MCS 6	MCS 6	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7
802.11n	40MHz	MCS 5	MCS 5	MCS 6	MCS 6	MCS 6	MCS 6	MCS 6	MCS 7	MCS 7	MCS 7
802.11ac	20MHz	MCS 6	MCS 6	MCS 6	MCS 6	MCS 7	MCS 7	MCS 7	MCS 7	MCS 8	MCS 8
802.11ac	40MHz	MCS 5	MCS 5	MCS 6	MCS 6	MCS 6	MCS 6	MCS 6	MCS 7	MCS 7	MCS 7
802.11ac	80MHz	MCS 4	MCS 4	MCS 4	MCS 5	MCS 5	MCS 6	MCS 6	MCS 6	MCS 6	MCS 6
802.11ac	160MHz	MCS 3	MCS 3	MCS 3	MCS 4	MCS 4	MCS 4	MCS 5	MCS 5	MCS 6	MCS 6
SNR in dB		31	32	33	34	35	36	37	38	39	40
802.11b	20MHz	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3
802.11a/g	20MHz	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7
802.11n	20MHz	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7
802.11n	40MHz	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7
802.11ac	20MHz	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9
802.11ac	40MHz	MCS 7	MCS 8	MCS 8	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9
802.11ac	80MHz	MCS 7	MCS 7	MCS 7	MCS 7	MCS 8	MCS 8	MCS 9	MCS 9	MCS 9	MCS 9
802.11ac	160MHz	MCS 6	MCS 6	MCS 6	MCS 7	MCS 7	MCS 7	MCS 7	MCS 8	MCS 8	MCS 9
SNR in dB		41	42	43	44	45	46	47	48	49	50
802.11b	20MHz	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3	MCS 3
802.11a/g	20MHz	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7
802.11n	20MHz	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7
802.11n	40MHz	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7	MCS 7
802.11ac	20MHz	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9
802.11ac	40MHz	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9
802.11ac	80MHz	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9
802.11ac	160MHz	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9	MCS 9

Residential Scenario

❖ Other Simulation Results (2)

● SINR

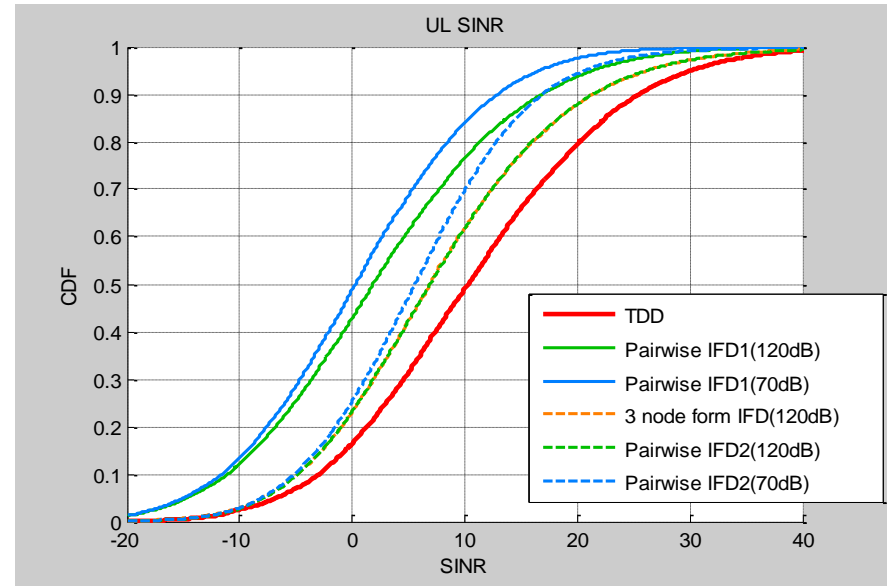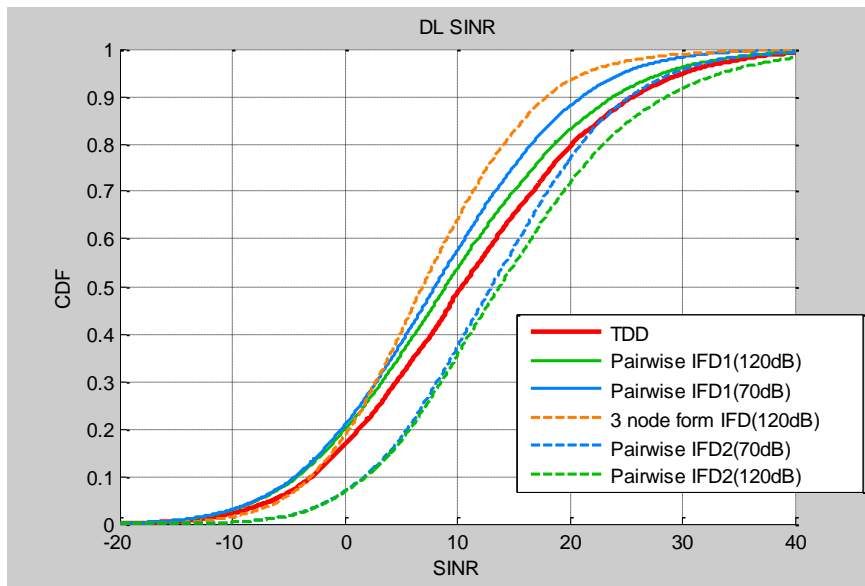

➤ DL

- with 120 dB SIC, the SINR of pairwise IFD \approx TDD
- 5 dB gain with SSC



➤ UL

- Increase of CCI between APs,
- Both IFD schemes show inferior performance to TDD even with 120 dB SIC

Residential Scenario


❖ Other Simulation Results (3)

● Spectral Efficiency

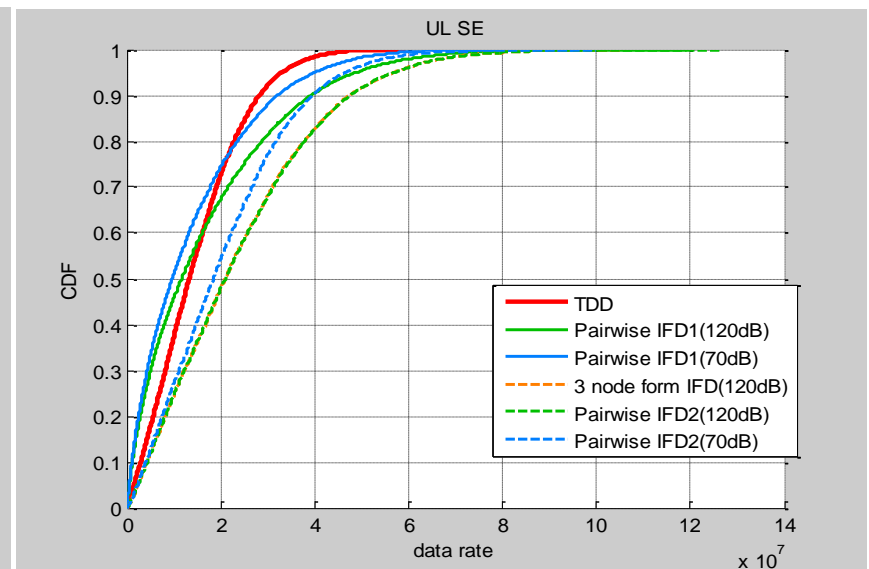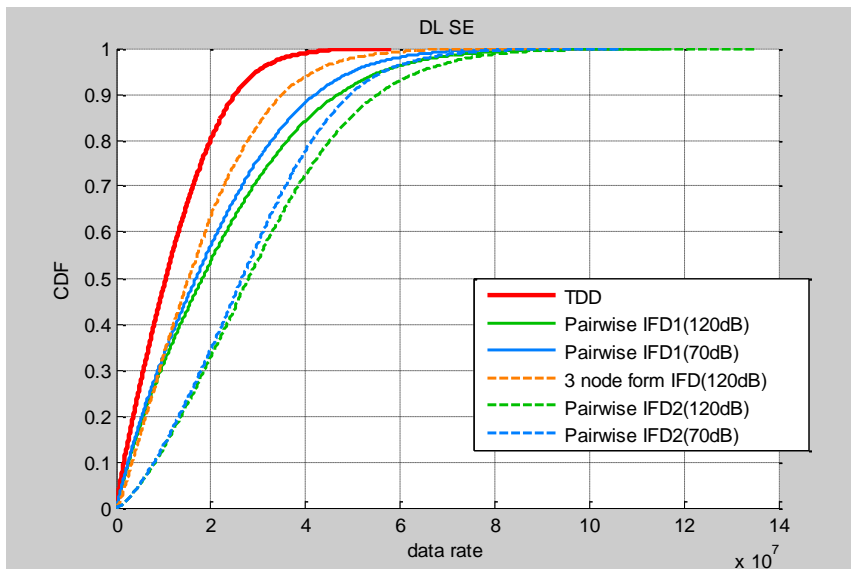

Outdoor Large BSS Scenario



❖ Other Simulation Results (1) (SSC, 1.SINR, 2. Thr, 3.SE)

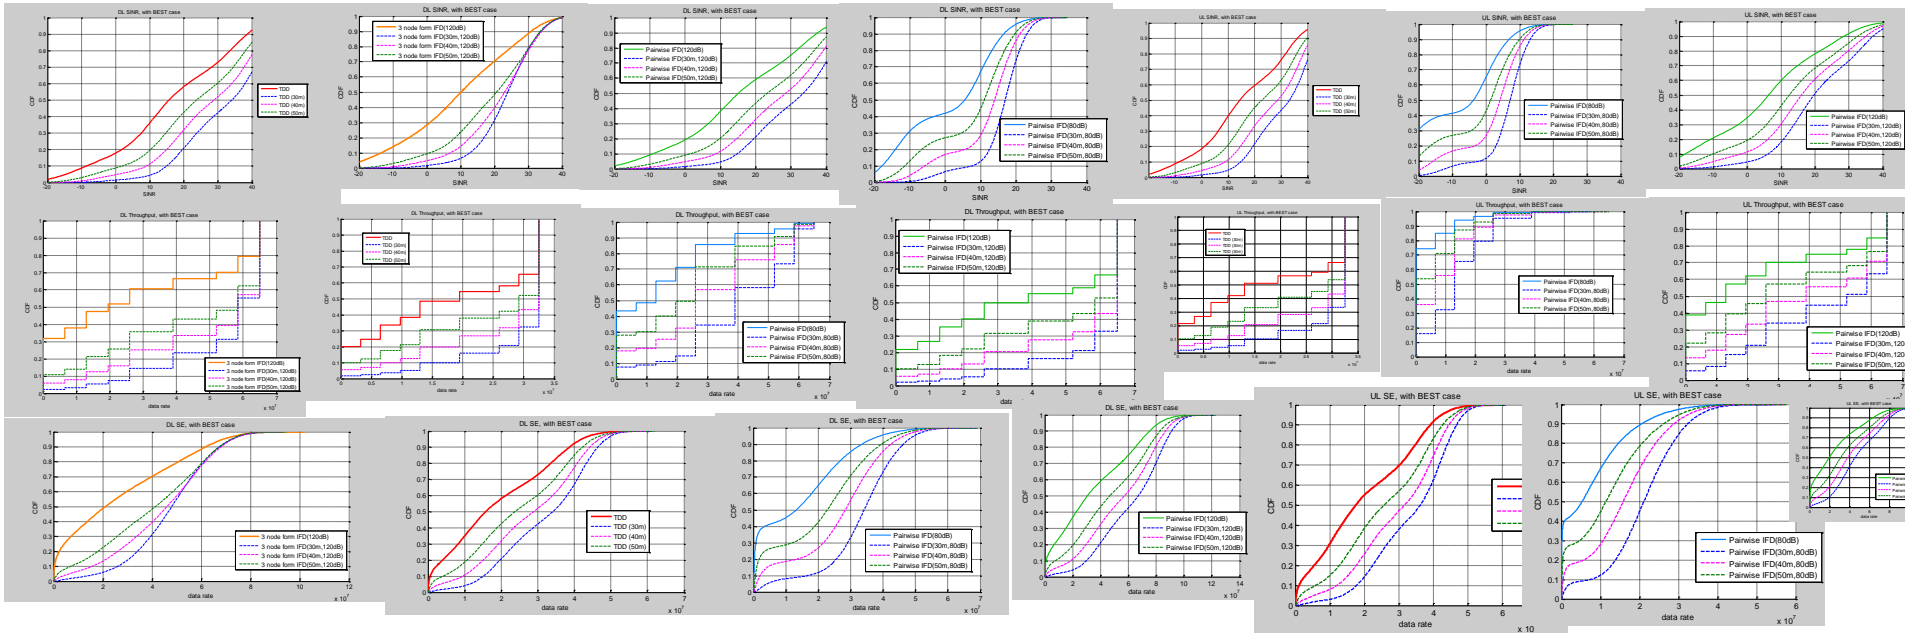

Outdoor Large BSS Scenario

❖ Other Simulation Results (2)

● SINR

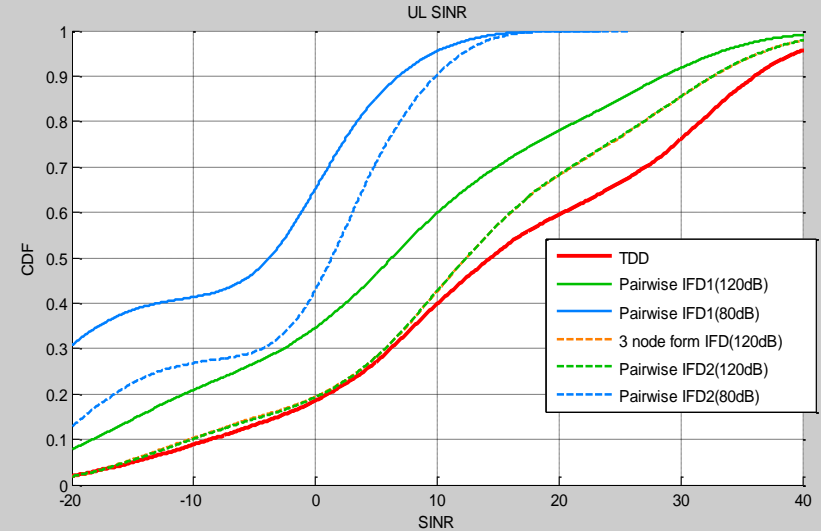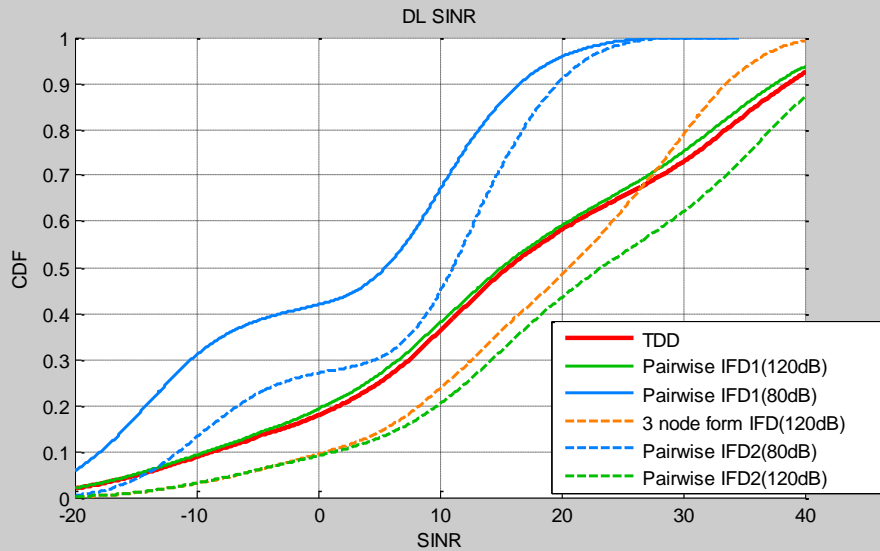

Outdoor Large BSS Scenario

❖ Other Simulation Results (2)

- Spectral Efficiency

