

Project: IEEE P802.15 Working Group for Wireless Personal Area Networks (WPANs)

Submission Title: [NICT's MAC Proposal In Response to Call For Contribution With Simulation Results]

Date Submitted: [May 5 2014]

Source: [Huan-Bang Li, Marco Hernandez, Igor Dotlic, and Ryu Miura] Company [NICT]

Address [3-4 Hikarino-oka, Yokosuka, Kanagawa, Japan]

Voice:[+81 468475104], FAX: [:+81 468475431], E-Mail:[lee@nict.go.jp]

Re: [Response to call for contribution of 15.8 PAC]

Abstract: [MAC proposal for IEEE802.15.8]

Purpose: [This document is to provide a MAC mechanism]

Notice: This document has been prepared to assist the IEEE P802.15. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release: The contributor acknowledges and accepts that this contribution becomes the property of IEEE and may be made publicly available by P802.15.

NICT's MAC Proposal In Response to Call For Contribution With Simulation Results

Huan-Bang Li
Marco Hernandez
Igor Dotlic
Ryu Miura

National Institute of Information and
Communications Technology (NICT), Japan

Purpose of This Document

- This document presents corresponding simulation results on the performance of NICT's MAC proposal which was submitted and presented in response to call for contribution (14-0125-01, 14-0126-00).

Acronyms Used In This Document

#: “Number of”

Ch: channels

I-PD: Initiator PD

J-PD: Joiner PD

Disp: Dispersion of start times of I-PD

I-PD seen by J-PD: TS beacon received

J-PD Joined: Received TB beacon with ID in list

PHY Parameters Used In Simulations

Parameter	Value
PHY	BPSK(1/2)
Symbol rate	1 MHz
Data rate	0.5 Mbps
Bandwidth	2MHz
Number of channels (@2.45 GHz)	16 (5MHz Spacing)
TX Power	20dBm
Carrier-Sense threshold	-109.5 dBm
Channel loss (below rooftop, 2.45GHz)	DCN-0459-08, p. 16
Es/N0 : BER table	DCN-0058-01
Power Consumption (@3.6V)	Tx: 11.3 mA Rx: 13.5 mA Standby: 26 uA


MAC Parameters Used In Simulations

Parameter	Value
TS Beacon data size	16 bytes (airtime: 0.256ms)
TB Beacon Data size	320 bytes (airtime: 6.24ms) [20 x 16 bytes]
Join Request Data Size	16 bytes
Application Data Size	512 bytes
Superframe period (TcoMIN_duration)	102.40ms
TB slot duration	10 .240ms
CFP duration	46.080ms
CAP duration	46.080ms
Sensing time for TS beacon (TcoMIN_cca)	0.256 ms
Maximum number of beacons before re-sense (NcoMax_send)	3

Large Scale Simulation Scenario

- Layout
 - 500m x 500m
 - 2-stage drop, with 100m spread range for each drop
 - Static Mobility
- I-PD “turn on”
 - at random times during an initial “dispersion” time (to avoid extreme case of all starting at the same time)
- Simulation time
 - 4 seconds, corresponding to ~ 40 periods

Simulation Scenario

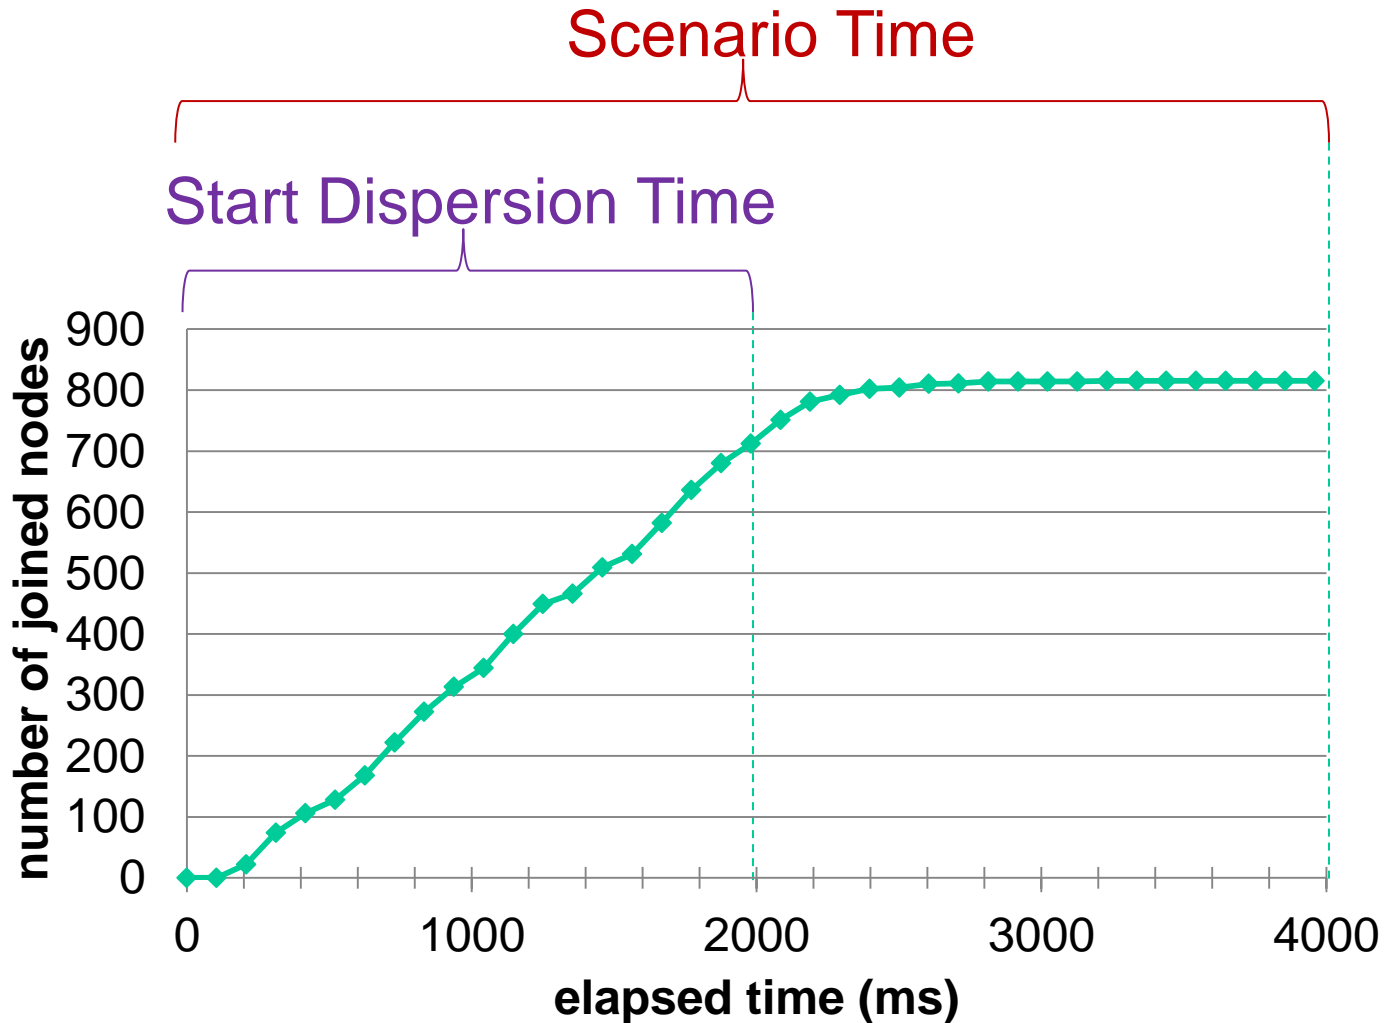

Proposed Common Mode

- There shall be one and only one common mode at each frequency band that is dedicated to PAC.
- A common mode shall use a assigned fixed RF channel, and have fixed PHY parameters including modulation, channel coding, and data rate.
- All PDs shall be able to operate at the common mode.

Reason: Fixed RF channel and PHY parameters guarantee interoperability among PDs.

Operations


- I-PD Procedure
 - broadcast TS beacons in the common channel
 - broadcast TB beacons during TB in group channel
 - broadcast application packets during CFP after receiving a Join request

- J-PD Procedure
 - initially receive TS beacons in common channel and then switch to group channel
 - receive TB beacons in the TB slot, and transmit Join Requests during CAP

Policy of Using Common Mode

- Besides emergency message transmission, to decrease scanning latency, it is desired to use common mode only for starting discovery, or for initiating a PAC group.
- Common mode should not be used in operations or communications for an established PAC group.

Proposed Superframe Structure

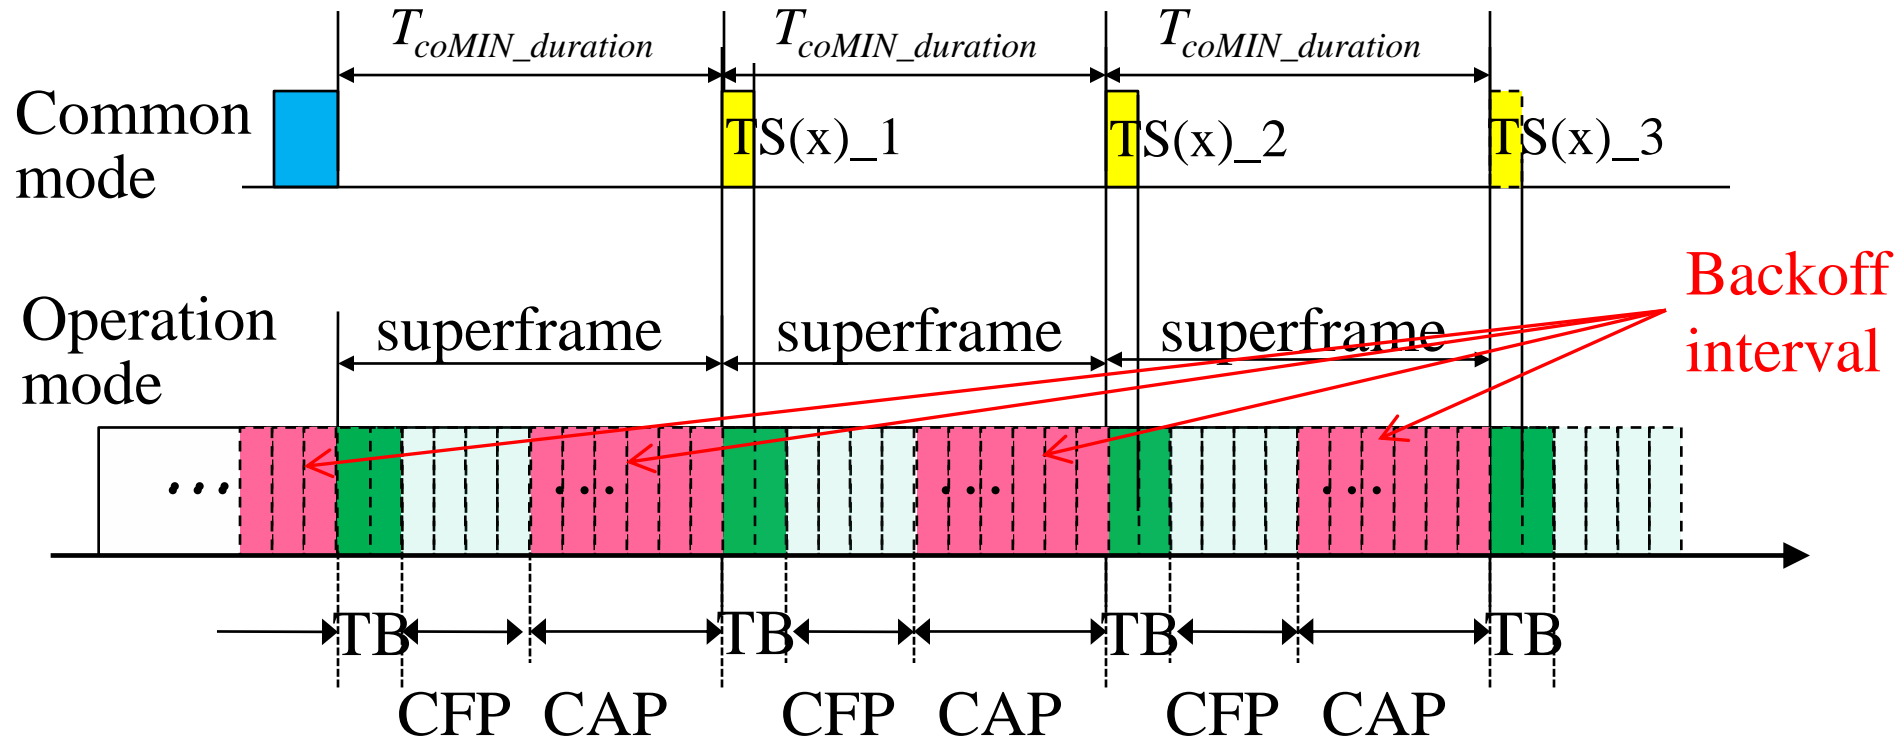

- Operation within an operation mode is based on a superframe structure, which includes a temporary beacon (TB), CFP, and CAP. The clock of TB is synchronized to the first TS.
- **The length of a superframe is equal to $T_{coMIN_duration}$**

Simulation On Discovery

Simulation Scenarios

- Common channel only
- All PD transmitting according to common-channel MAC protocol
- Two versions of the MAC protocol
 - “prevail=ON” : Beacon transmission is given priority over reception i.e., a reception will be interrupted to transmit beacon.
 - “prevail=OFF”: Reception is given priority over transmission i.e., a beacon transmission is cancelled (deferred one period) if the node is already receiving when it is time to send a beacon

Evaluated Parameters


Average Number of Nodes Discovered

$N(j,t)$: number of nodes discovered by node j at time t from start of simulation

$N(t)$: average over j at time t .


Low Density Case (200 nodes)

Average Number of Nodes Discovered

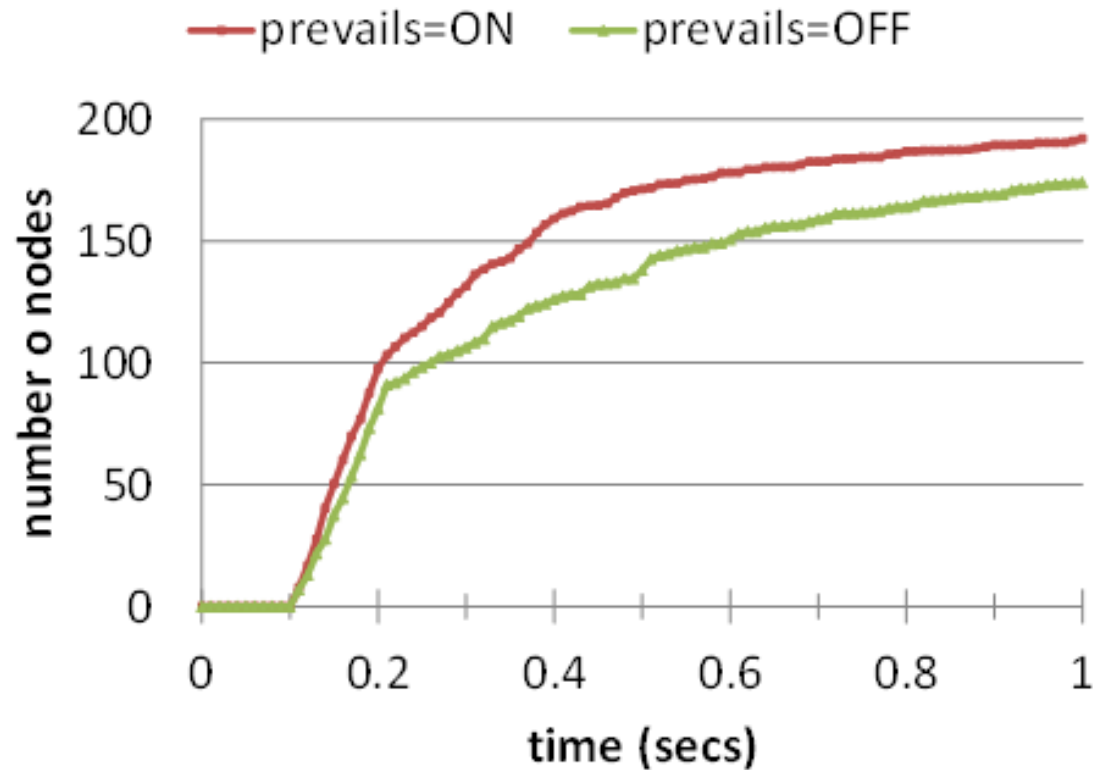


High Density Case (1000 nodes)

Average Number of Nodes Discovered

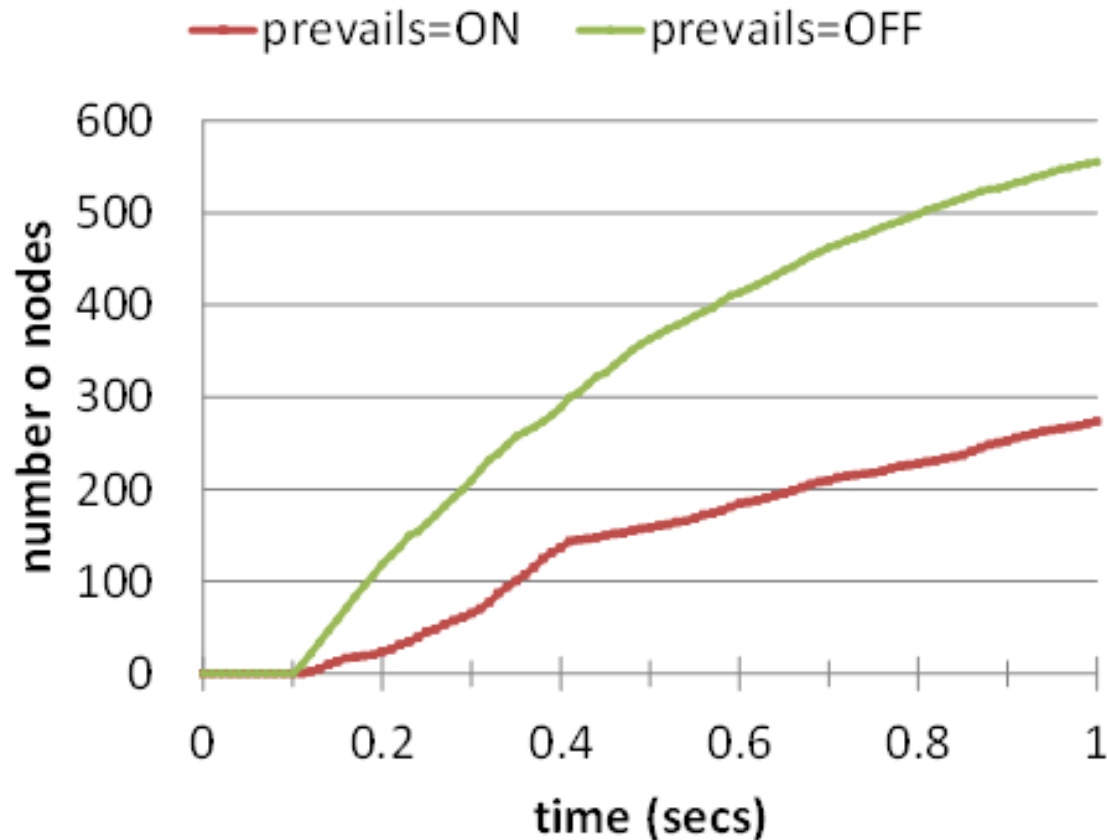

Results for 10 Seconds (1000 nodes)

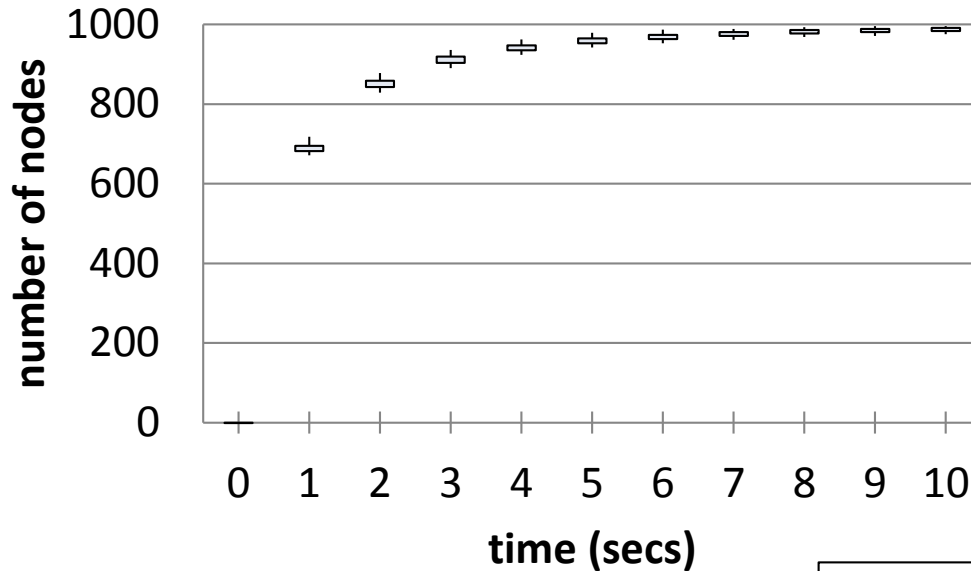

* Plot symbol shows range of distribution (max, mean+sd, mean-sd, min)

Conditions:

- ts-prevail=OFF
- NcoMax=3, (See 0381-00)
- Nodes are dropped randomly inside circle with 50m diameter

Simulation on Association

Association Procedure

- i. The I-PD broadcasts an invitation (active scanning) with TS including information of necessary IDs, selected operation mode (including channel), and a group clock.
- ii. When a joiner PD (J-PD) scans the invitation (passive scanning) at common mode, it moves to the selected operation mode announced in (i). Accounting from the start of TS, the joining PD waits for a duration of $TB+CFP$. Then, it sends joining request including its ID information with a random backoff within a duration of CAP.

Association Procedure (continual)

- iii. When a J-PD scans the TS in an iteration, it should calculate the difference between t_{now} and t_{start} . If t_{start} is within a CAP, the J-PD takes random backoff between t_{start} and the end of CAP and sends joining request. If t_{start} is out of a CAP, it waits until the next CAP before sending request.
- iv. I-PD scans the selected operation mode (passive scanning), registers the J-PDs and distributes a list of the registered PDs within the temporary beacon (TB) at the selected operation mode.
- v. J-PDs that had sent joining requests but are not included in the distributed PDs list should repeat the process of (ii) and (iii).

Association Latency

- I-PD Discovered Time
 - Time when a J-PD receives the first TS beacon with its group ID
- J-PD Discovered Time
 - Time at end of TB slot during which J-PD receives first TB beacon that includes its own ID (ie. acknowledgement of join request)
- Association Latency
 - Difference between I-PD Discovered Time and J-PD Discovered Time


Simple Case

Numbers of Nodes and Channels		
# Channels	# I-PD	# J-PD
1	1	64

+ Extra condition:

distance < 50 m so packet loss is only due to collision,
not propagation loss

Results of Simple Case

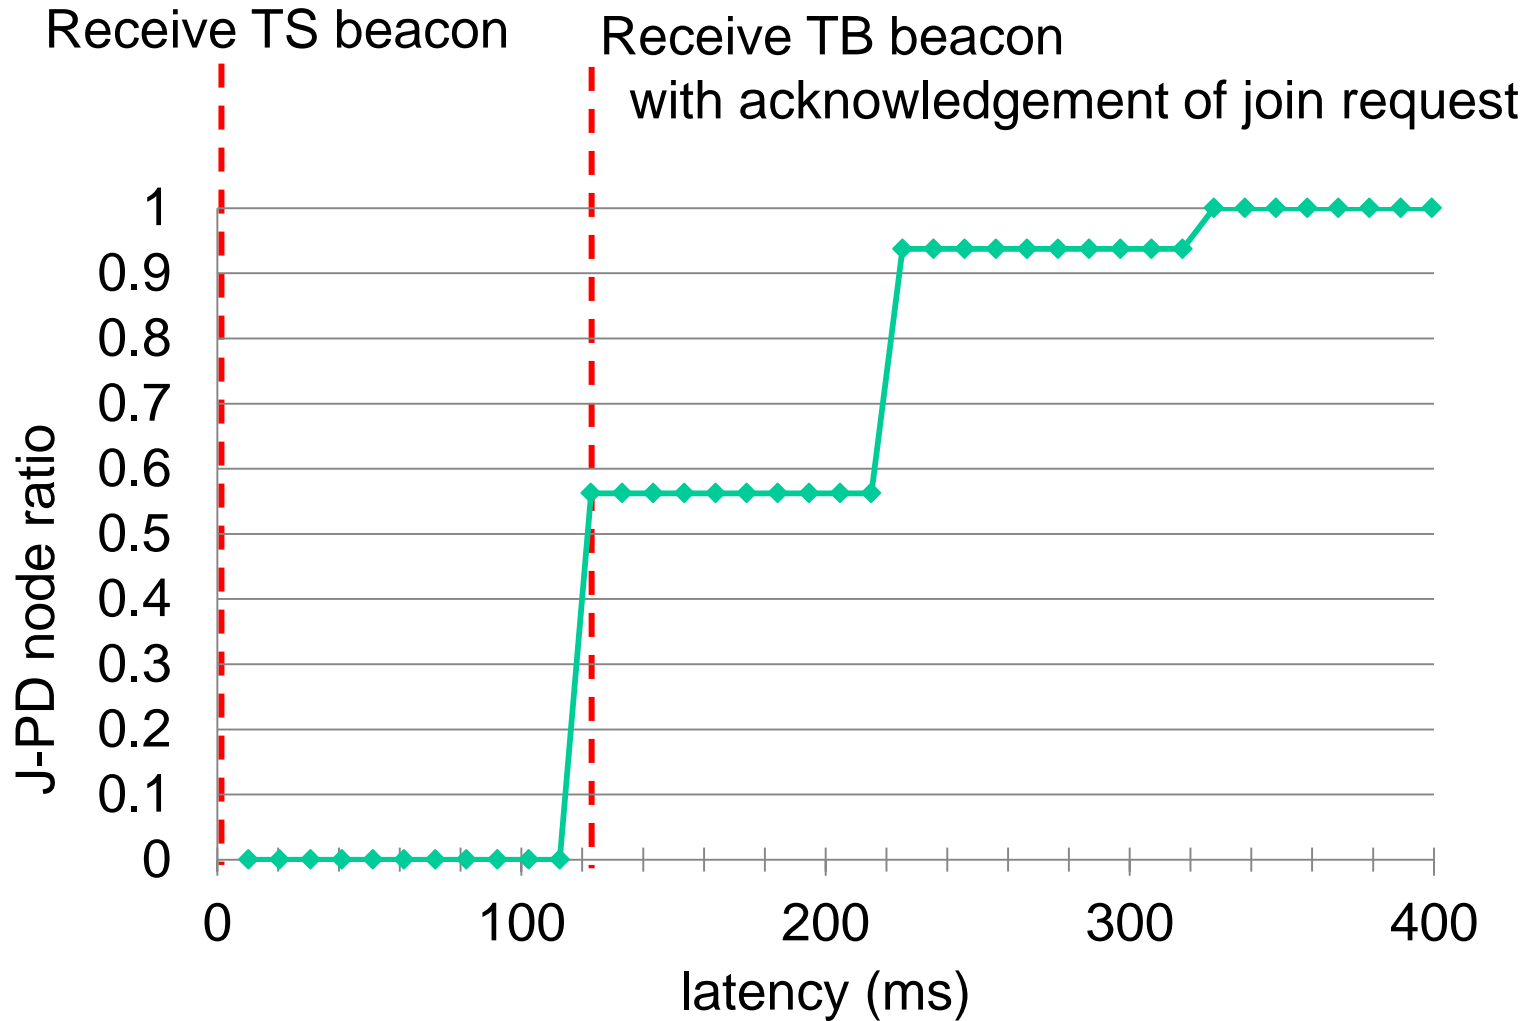

Latency For Various Cases

#ch	# I-PD	# J-PD	Mean Latency (ms)	
			Drop range 50 m	Drop range 100m
1	1	4	108	245
1	1	16	128	258
1	16	16	115	135
1	16	48	115	176
1	32	32	118	137
1	64	64	135	143

Simulation on Group Operation

Group Operation

- ① Any I-PD that initiated a group will act as a temporary leader of the formed group (*distributed and self-organized control*). Moreover, the role of leader can be changed among PDs in the group.
- ② Communications within the formed group are undertaken using an selected mode and can move to the other selected modes.
- ③ Coordination may performed among neighbor groups for channel sharing or interference avoidance.

Operation Procedure

- Broadcast by Initiators (I-PD) to Joiners (J-PD)
- Start broadcasting after receiving first Join Request
- Broadcast as many packets as possible from application-packet-queue during allocated part of CFP (specifically $1/3$ part of CFP)
- Full queue condition: Application packets created at rate $>$ maximum transmit rate determined by packet-size/CFP duration.
- Measure application traffic flow in last *200 milliseconds* of simulation

Parameters Examined

- Packet Delivery Ratio (PDR)
 - Ratio of the number received by a J-PD to the number of application data packets sent by an I-PD, averaged over all J-PD
- Goodput
 - Total number of packets received by all J-PD during 200 milliseconds, expressed as bytes per second per square-meter. Computed as $\text{number-of-packets} \times (512 \text{ bytes}) / (0.2 \text{ sec} \times 500 \text{ m} \times 500 \text{ m}) = \text{number-of-packets} \times 0.01024 \text{ bytes per second per square-meter}$
- Fairness
 - Jain's index for number of packets received by J-PDs


Moderate Density Case

Numbers of Nodes and Channels		
# Channels	# I-PD	# J-PD
16	32	512


Results At A Glance

Association			Operation		Combined
# Joined	Join Ratio	Mean Latency [ms]	PDR	Jain's Index	Power [mWs]
485	0.95	331	0.91	0.78	29


Associated J-PD By All I-PD

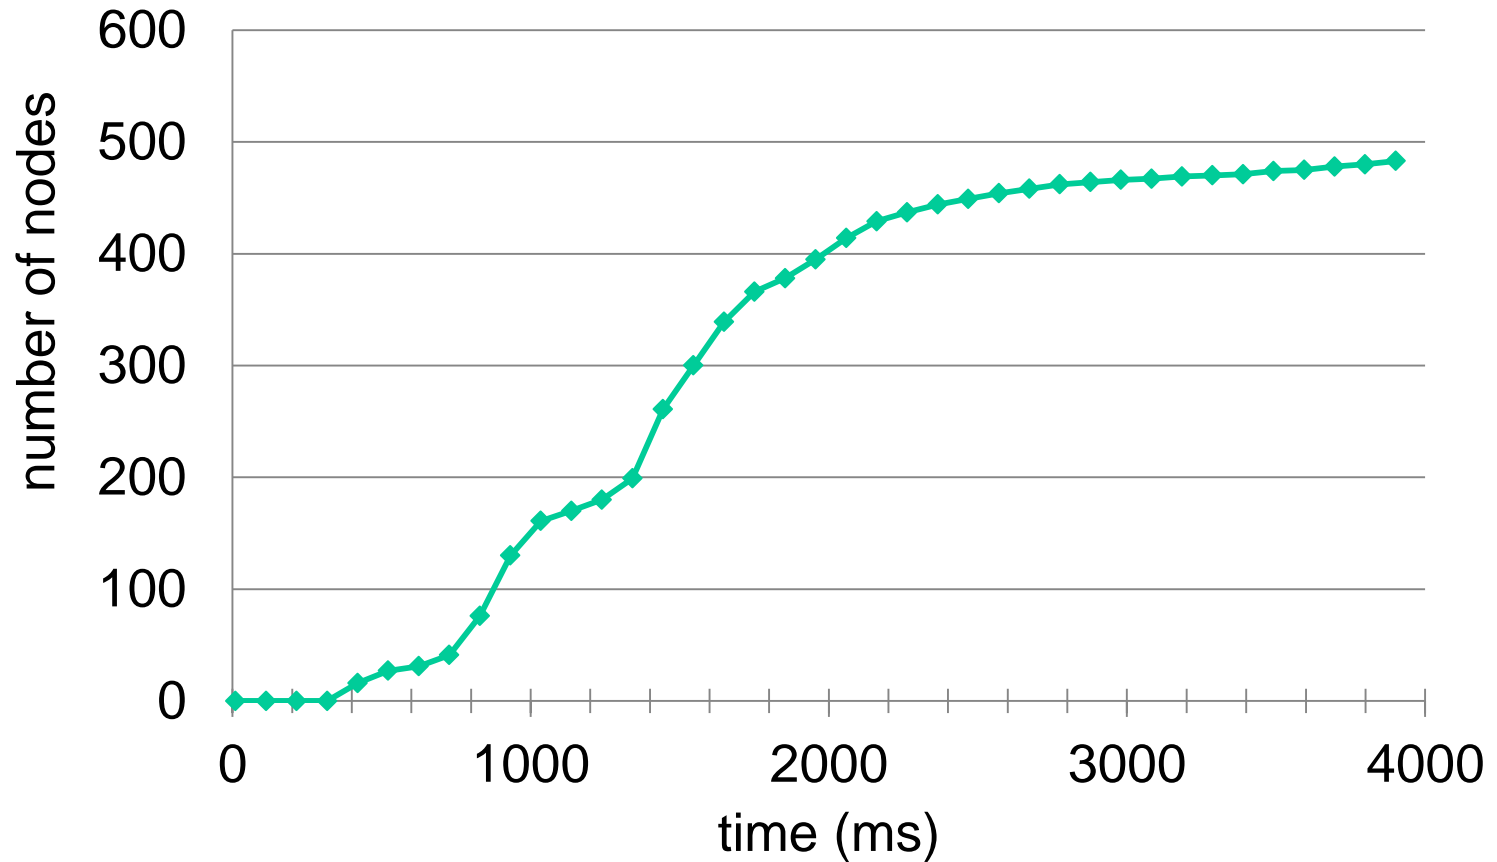

Results of Association Latency (short-time)

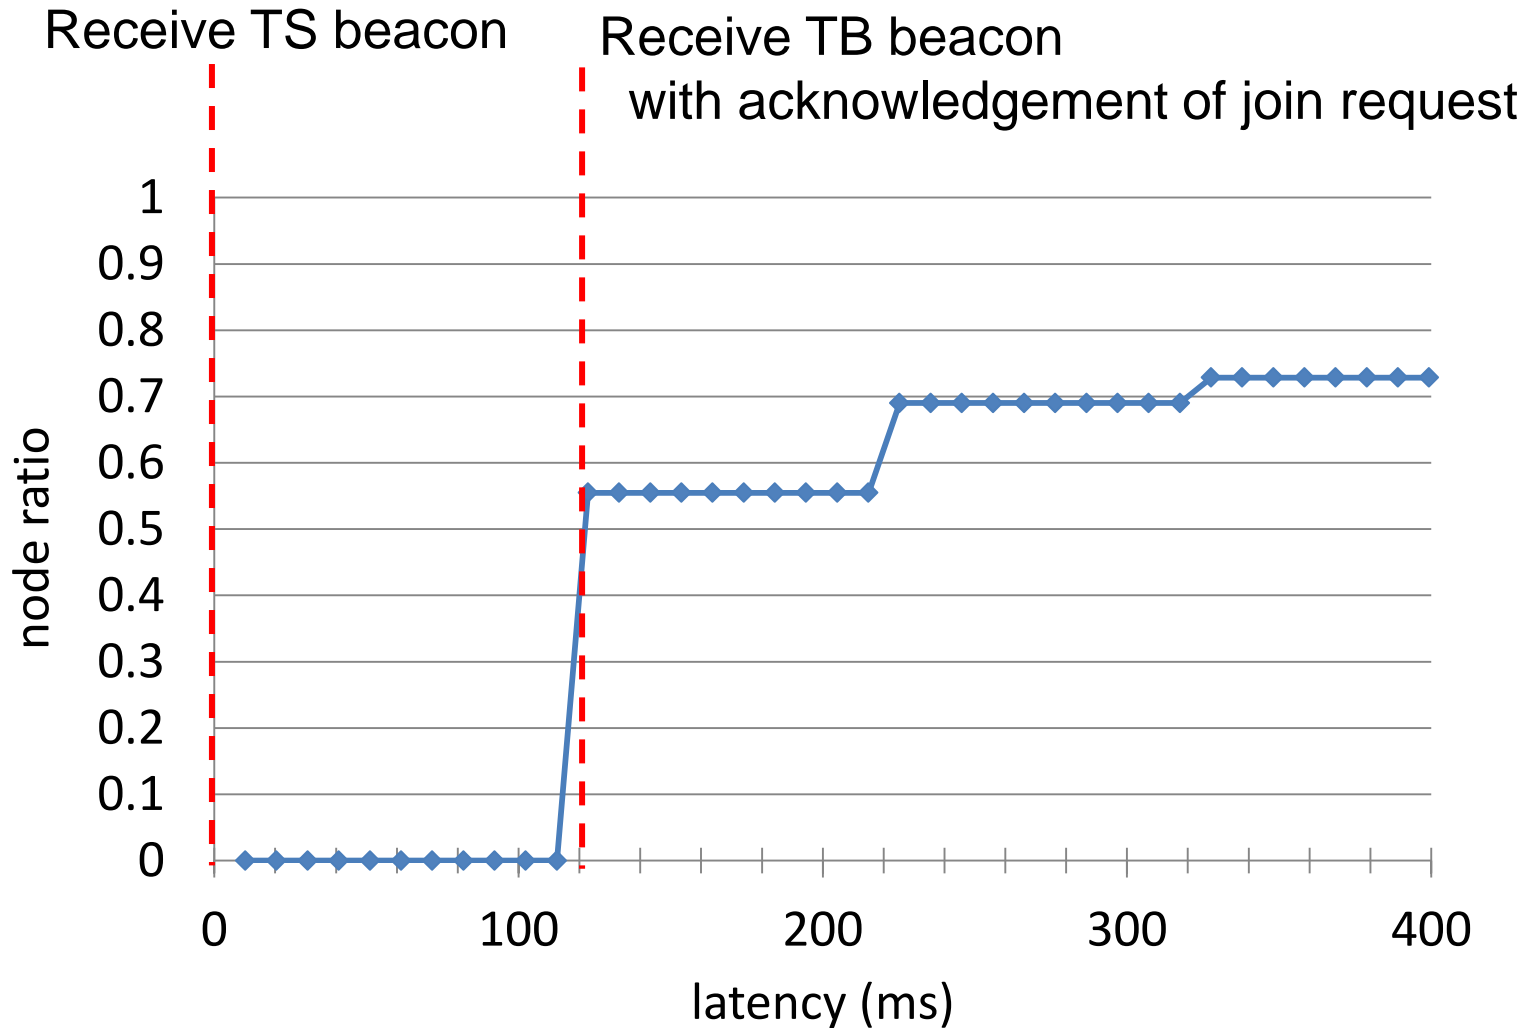

Results of Association Latency (long-time)

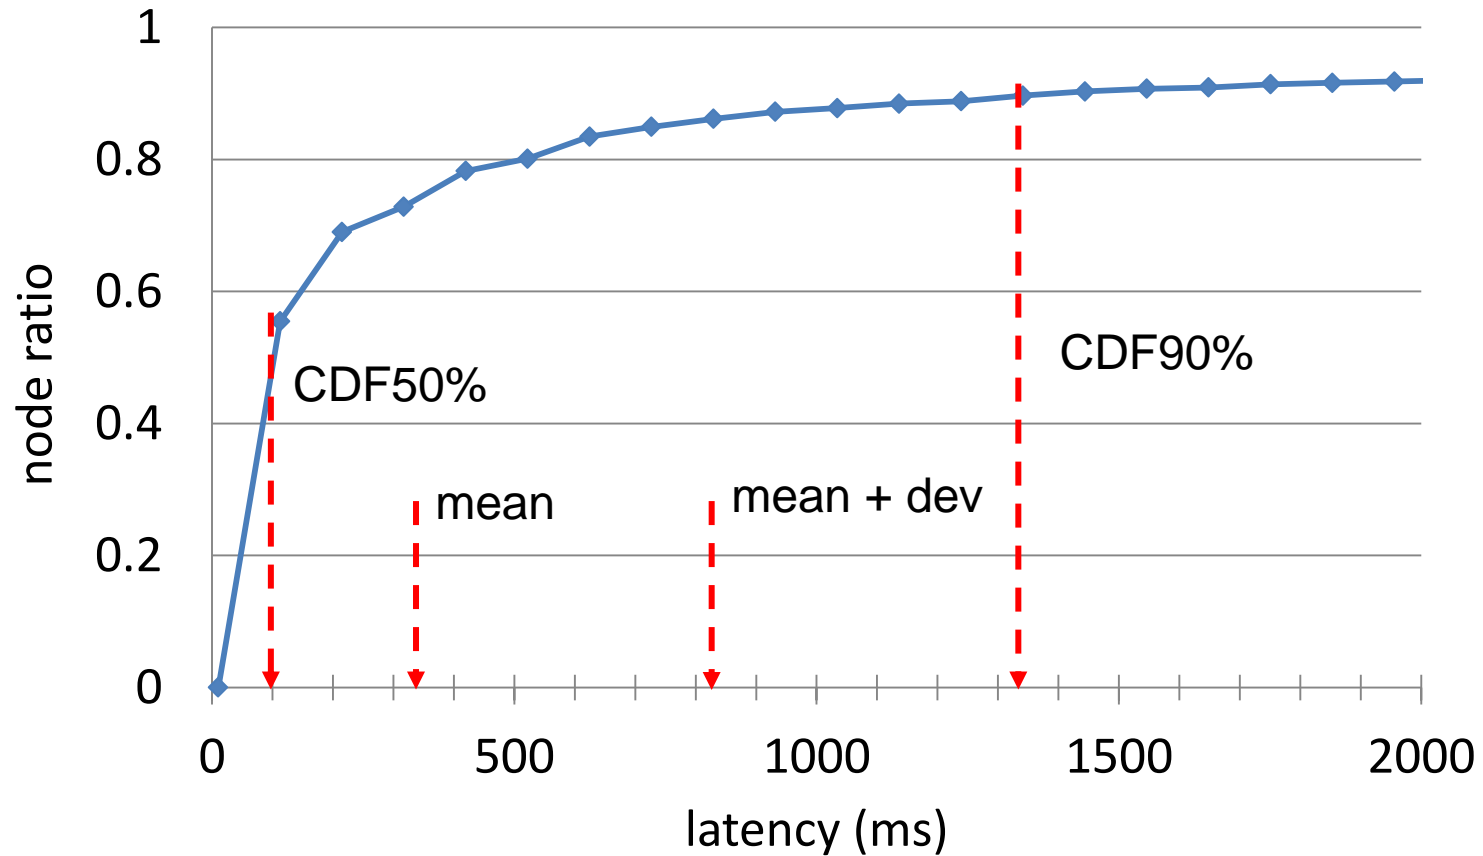

Performance For Various Parameters

# ch	# node	# I-PD	# J-PD	Ratio I/ch	Ratio J/I	Associated		Mean Latency [ms]	PDR	Jain's Index	Power [mWs]
						#	Radio				
16	48	16	32	1	2	32	1	355	0.83	0.69	36
16	544	32	512	2	16	485	0.94	331	0.91	0.78	29
16	1056	32	1024	2	32	991	0.97	345	0.85	0.74	32
16	576	64	512	4	8	486	0.94	301	0.9	0.75	32
16	1088	64	1024	4	16	965	0.96	319	0.90	0.73	31
16	1152	128	1024	8	8	970	0.95	325	0.9	0.74	31


High Density Case

Numbers of Nodes and Channels		
# Channels	# I-PD	# J-PD
16	256	4096


Results At A Glance

Association			
# Associated	Associated Ratio	Mean Latency [ms]	Power [mWs]
3917	0.96	327	46

Associated J-PD By All I-PD

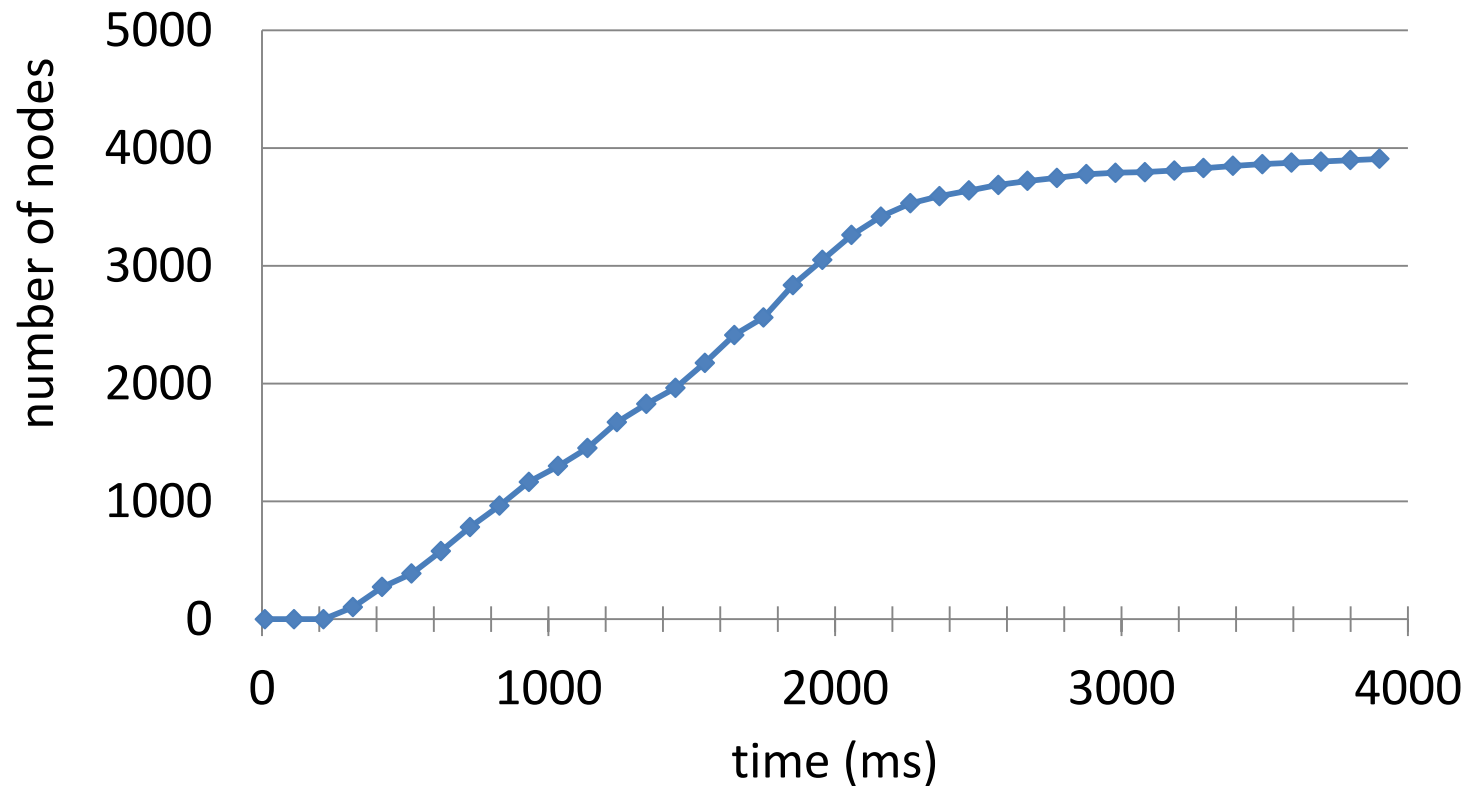

Results of Association Latency

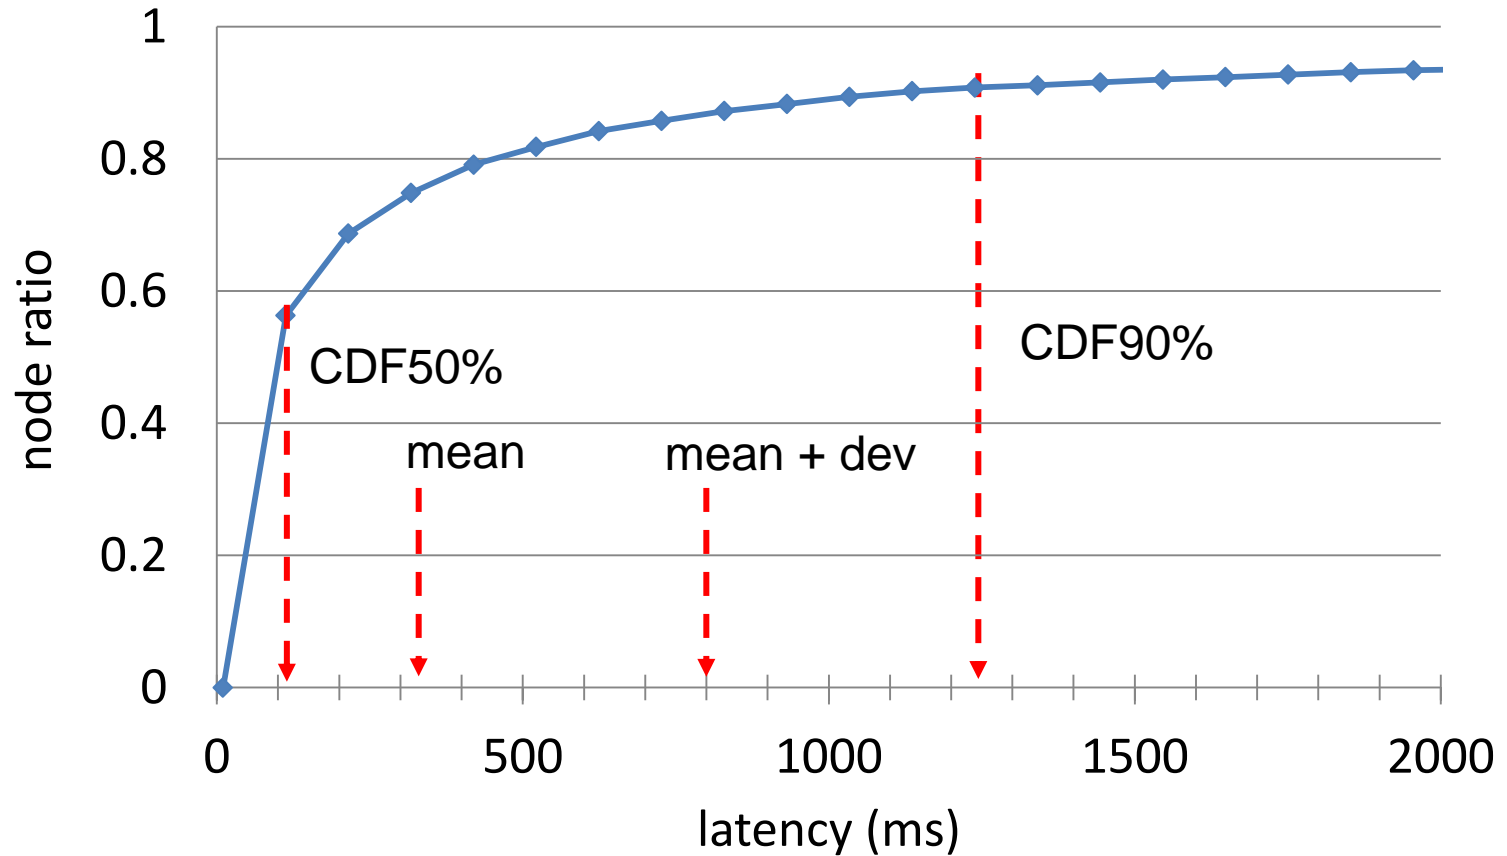

Conclusions

- Simulation results based on NICT's MAC proposal are presented for
 - Discovery
 - Association
 - Group operation