

DOCUMENT RESUME

ED 247 412

CE 039 444

TITLE Basic Electricity/Electronics (Industrial Arts). Vocational Education Curriculum Guide. Bulletin 1724.

INSTITUTION Louisiana State Dept. of Education, Baton Rouge. Div. of Vocational Education.

PUB DATE [84]

NOTE 305p.

PUB TYPE Guides - Classroom Use - Guides (For Teachers) (052)

EDRS PRICE MF01/PC13 Plus Postage.

DESCRIPTORS Behavioral Objectives; Classroom Techniques; Computers; Electrical Occupations; *Electric Circuits; *Electricity; *Electronic Equipment; *Electronics; Equipment Utilization; Guidelines; *Industrial Arts; Instructional Materials; Job Skills; Learning Activities; Lesson Plans; Magnets; Mathematics Skills; Measurement Equipment; Measurement Techniques; Program Implementation; Resources; Robotics; Safety; Secondary Education; Semiconductor Devices; State Curriculum Guides; Teaching Methods; Trade and Industrial Education Louisiana

IDENTIFIERS

ABSTRACT

This curriculum guide is designed to assist industrial arts teachers, counselors, and administrators in improving instruction in the areas of electricity and basic electronics. Included in the first part of the guide are a course flow chart, a course description, a discussion of target grade levels and prerequisites, course goals and objectives, an introduction, and a course outline. The next major section is a unit teaching guide consisting of units on the following topics: safety, mathematics skills, the nature of electricity, meters and measuring, residential electricity, direct-current circuits, magnetism, test equipment, alternating-current circuits, semiconductors, electronic devices, circuit fabrication, computers, robotics, industrial electricity and electronics, and careers. Appended to the guide are sample tests, a tool list, information on fire extinguishers, safety recordkeeping forms, a math review, formulas and conversions, worksheets on Ohm's Law and the Power Law, a tool identification sheet, instructions on house wiring and reading meters, sample lab exercises, and information sheets on robotics and the effects of current on the body. (MN)

 * Reproductions supplied by EDRS are the best that can be made *
 * from the original document. *

12-1-74

ED247412

BASIC ELECTRICITY/ELECTRONICS (Industrial Arts)

VOCATIONAL
EDUCATION



BULLETIN 1724

CURRICULUM GUIDE

U S DEPARTMENT OF EDUCATION
NATIONAL INSTITUTE OF EDUCATION
EDUCATIONAL RESOURCES INFORMATION
CENTER (ERIC)

- ✓ This document has been reproduced exactly as received from the person or organization originating it. Minor changes have been made to improve reproduction quality.
- Points of view or opinions stated in this document do not necessarily represent official NIH or ERIC policy.

DEPARTMENT OF EDUCATION

THOMAS G. CLAUSEN
State Superintendent

PERMISSION TO REPRODUCE THIS
MATERIAL HAS BEEN GRANTED BY

State

TO THE EDUCATIONAL RESOURCES
INFORMATION CENTER (ERIC)

ED 247412

STATE BOARD OF ELEMENTARY AND SECONDARY EDUCATION

<u>Member</u>	<u>Congressional District</u>
Mr. Jesse H. Bankston	6th
Dr. John A. Bertrand	7th
Bro. Felician Fourxier, S.C., President	At-large
Mr. Milton Hamel	4th
Mrs. Gloria J. Harrison	At-large
Mrs. Martha Scott Henry	At-large
Dr. Claire R. Landry, Vice-President	1st
Mr. Jack Pellegrin	3rd
Mr. A. J. "Sookie" Roy, Jr.	8th
Bro. David Sinitiere, F.S.C.	2nd
Mrs. Marie Louise Snellings, Secretary-Treasurer	5th

EQUAL OPPORTUNITY STATEMENT

This is an Equal Opportunity Institution and is dedicated to a policy of non-discrimination in employment or training. Qualified students, applicants or employees will not be excluded from any course or activity because of age, race, creed, color, sex, religion, national origin, or qualified handicap. All students have equal rights to counseling and training.

This public document was published at a total cost of \$1.88; 1647 copies of this public document were published in this 1st printing at a cost of \$3097. The total cost of all printings of this document, including reprints is \$3097. This document was published by Louisiana Department of Education, Office of Vocational Education, Post Office Box 44064, Baton Rouge, Louisiana 70804 for the dissemination of vocational education curriculum materials for new and changing occupational fields under authority of Public Law 94-482. This material was printed in accordance with the standards for printing by state agencies established pursuant to R.S. 43:31.

FOREWORD

This publication is a guide for the improvement of instruction in Industrial Arts Education for the State of Louisiana. It should be of benefit to industrial arts teachers, supervisors, counselors, and administrators. These operational guidelines will help local administrators, teacher educators, and industrial arts teachers determine the extent to which their programs are meeting the needs of our youth. Industrial Arts Education Programs must be organized to meet the needs of all students.


A constant concern for educators is the construction and revision of curriculum. Industry and technology are the core of industrial arts instruction. Both are constantly changing; therefore, a curriculum and instruction must change in order to provide students a realistic and accurate understanding of industry and its function in our complex technological society.

Thomas G. Clausen

Thomas G. Clausen
State Superintendent of Education

ACKNOWLEDGEMENTS

This publication represents the cooperative efforts of personnel in the Louisiana Industrial Arts Association and the Industrial Arts Section in the Office of Vocational Education, Louisiana State Department of Education. Special recognition goes to Dr. Thomas L. Eppler, Northwestern State University, who was the Project Director in the development of the guide. Special commendation goes also to the following writing team members who worked diligently to produce this guide: George W. Fisher, Duane D. Dunlap, and Johnny O. Hamilton.

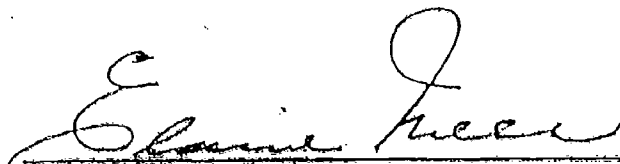

Elaine Webb, Ed.D.
Assistant Superintendent
Office of Vocational Education

CONTENTS

Foreword	1
Acknowledgements	11
Course Flow Chart	1
Course Description	2
Target Grade Levels	2
Prerequisite	2
Course Goals	2
Course Objectives	2
Introduction	3
Time Frame	4
Course Outline	5
Unit Teaching Guide	
Unit I Safety	23
Unit II Mathematics Review	27
Unit III Nature of Electricity	30
Unit IV Meters and Measuring	33
Unit V Residential Electricity	36
Unit VI Direct Current Circuits	41
Unit VII Magnetism	46
Unit VIII Test Equipment	49
Unit IX A.C. Circuits	53
Unit X Semiconductor Fundamentals	58
Unit XI Electronic Devices	60
Unit XII Circuit Fabrication	70
Unit XIII Introduction to Computers	74
Unit XIV Robotics	77
Unit XV Industrial Electricity/Electronics	81
Unit XVI Careers	86
Appendix 1 Sample Tests	89
Appendix 2 Tool List	132
Appendix 3 Fire Extinguishers	136
Appendix 4 Safety Recordkeeping	139
Appendix 5 Math Review	155
Appendix 6 Formulas and Conversions	170
Appendix 7 Ohm's Law and Power Law Worksheets	177
Appendix 8 Identification of Tools	181
Appendix 9 Graduations of a Rule	189
Appendix 10 Housewiring Materials	196
Appendix 11 Reading Meters	204
Appendix 12 Sample Lab Exercises	208
Appendix 13 Printed Circuit Board Construction	215
Appendix 14 Robotics	222
Appendix 15 Body Effects of Current	227
Bibliography	229

BASIC ELECTRICITY/ELECTRONICS

SAFETY

MATHEMATICS REVIEW

NATURE OF ELECTRICITY

METERS AND MEASURING

RESIDENTIAL ELECTRICITY

D.C. CIRCUITS

MAGNETISM

TEST EQUIPMENT

A.C. CIRCUITS

SEMICONDUCTOR FUNDAMENTALS

ELECTRONIC DEVICES

CIRCUIT FABRICATION

INTRODUCTION TO COMPUTERS

INTRODUCTION TO ROBOTICS

INDUSTRIAL ELECTRONICS

CAREERS

ADVANCED ELECTRONICS

Title:

Basic Electricity/Electronics

Course Description:

Basic Electricity/Electronics is designed as a one year introductory course and requires no previous knowledge of electricity or electronics. The course content is designed to make the student aware of the intricate relationship between our highly technological society and the fields of electricity and electronics. The student will gain a working knowledge of relevant theories and physical laws and their application. An awareness of practical devices will also be developed. The student will also gain practical hands-on learning experiences through the design, fabrication and testing of electrical and electronic circuits and devices.

Target Grade Level:

This course is designed for students in grades 10, 11 and 12.

Prerequisites:

General Industrial Arts (Algebra I desirable)

Course Goals:

In Basic Electricity/Electronics the student will become acquainted with the fields of electricity and electronics and their impact on society. The student will be exposed to the skills, techniques, tools, materials, and information related to electricity and electronics. The student will also be aware of the occupational and educational opportunities available upon completion of this course.

Course Objectives:

1. To develop in the student working knowledge of electricity and electronics.
2. To provide each student with the opportunity to explore those aspects of electricity and electronics that best meet his/her needs, aptitudes, or interest.
3. To provide the student an opportunity to apply science and math skills to practical situations.
4. To develop in the student the basic skills in the proper use of tools and equipment.
5. To develop in the student problem solving abilities and critical thinking.
6. To develop in the student a safety conscious attitude and safe work habits.

7. To provide the student the opportunity to explore occupational and educational opportunities in electricity, electronics, and related fields.
8. To develop in a student an awareness of the diverse nature of the field of electronics and its impact on society.
9. To inform the student so that he may become a wise consumer of electronic goods.

Introduction:

We are presently living in an electronic age. Electrical and electronic equipment warm and cool our homes, provide us light, entertain us, and make our work easier while making us more productive. In order to be wise consumers of electricity and wise users of electrical devices one must have some background knowledge in electricity. A substantial knowledge of electronics will assist the student in succeeding in future careers in Electricity/Electronics and many other areas.

This course was designed to provide the student with exposure to many areas of Electricity/Electronics. This exposure is broad-based though certainly not all inclusive. An in-depth study of more significant areas has been included so that depth of understanding may be achieved as well. This course was designed to be as technologically up-to-date as possible. However, the teacher should feel free to add material to this curriculum as changes in the state-of-the-art make additions necessary.

TIME FRAME

Hours

5	Unit 1	Safety
5	Unit 2	Math Review
15	Unit 3	Nature of Electricity
5	Unit 4	Meters and Measuring
25	Unit 5	Residential Electricity
22	Unit 6	D.C. Circuits
8	Unit 7	Magnetism
8	Unit 8	Test Equipment
17	Unit 9	A.C. Circuits
5	Unit 10	Semiconductor Fundamentals
20	Unit 11	Electronic Devices
5	Unit 12	Circuit Fabrication
5	Unit 13	Introduction to Computer Literacy
5	Unit 14	Robotics: An Introduction for Your Classroom
10	Unit 15	Industrial Electricity/Electronics
3	Unit 16	Careers

Total - 163 hours. The remaining 17 hours can be used for opening and closing school, projects, school activities or to place extra emphasis where the instructor deems necessary.

ELECTRICITY/ELECTRONICS

A COURSE OUTLINE

I. ELECTRICITY AND ELECTRONICS SAFETY

A. Personal Safety Practices

1. State safety laws
2. OSHA
3. Electric shock
4. Protection
5. Effect of current on human body
6. Housekeeping

B. Safety Hazards

1. Hazardous conditions
2. Ground fault
3. Live circuits
4. Chemicals
5. Class of fires

C. Color Codes

1. Red
2. Yellow
3. Green
4. Orange
5. Purple

D. Mechanical Safety Tools

1. Hand tools
2. Power tools
3. Meters
4. Ladder use

E. Emergency Procedures (First Aid)

1. Bleeding
 - a. Blood spurts
 - b. Blood flows
 - c. Blood oozes
2. Breaks or fractures
 - a. Simple fractures
 - b. Compound fractures
3. Open wounds
 - a. Minor cuts and abrasions
 - b. Serious wounds
 - c. Puncture wounds

4. Electrical shock
 - a. Shut off the current quickly.
 - b. Remove the victim.
 - c. Check heart and lungs.
 - d. Apply artificial respiration if necessary.
5. Equipment failure
 - a. Wrong size or type
 - b. Motor-driven equipment
 - c. Portable electric tools
 - d. Overloading
 - e. Failure to positively lock out
 - f. Disconnecting of electric cords
 - g. Test equipment
6. Fire.

II. MATHEMATICS REVIEW

Unit Objective - To review with students the mathematic skills needed in Electronics

A. Fractions

1. Addition of fractions
2. Subtraction of fractions
3. Multiplication of Fractions
4. Division of fractions

B. Division of Decimal Numbers

1. Determining decimal place
2. Rounding off to desired place

C. Multiplication of Decimal Numbers

D. Scientific Notation

1. Expressing numbers in scientific notation
2. Converting scientific notation expressions
3. Adding and subtracting numbers expressed in scientific notation
4. Multiplying and dividing numbers expressed in scientific notation

E. Unit Prefixes

1. Prefixes
2. Abbreviations
3. Value
4. Conversions

F. Basic Algebra

1. Solving equations
2. Transforming equations
3. Algebraic substitutions

G. Calculating Square Roots (optional)

1. Square roots of decimal numbers
2. Square root of numbers in scientific notation

III. NATURE OF ELECTRICITY

A. Energy and Work

B. Structure of Matter

1. Compounds
2. Elements
3. Atoms
4. Subatomic particles

C. Electric Fields

1. Ions and ionization
2. Static electricity
3. Law of charges
4. Measuring charges
5. Industrial applications

D. Electrical Current

1. Electron current
2. Ion current
3. Measuring current

E. Conductors and Insulators

1. Properties of conductors
2. Properties of insulators

F. Electrical Potential

1. Determining electrical potential
2. Measuring electrical potential
3. Producing electrical potential

G. Resistance

1. Specific resistivity
2. Resistance and its measure

H. Ohm's law

I. Power

1. What is power
2. Relation to voltage and current
3. Measuring power
4. Relationship to energy

IV. METERS AND MEASURING

A. Reading Meters

1. Analog meters
 - a. Linear scale
 - b. Logarithmic scale
2. Digital meters

B. Using Meters

1. Ammeters
2. Voltmeters
3. Ohmmeters
4. Multimeter
5. Meter error
 - a. Loading
 - b. Parallax error

C. Meter Care

1. Handling the meter
2. Setting and adjusting meters

V. RESIDENTIAL ELECTRICITY

A. Safety (Review from Topic I on safety)

1. First aid
2. Hazards ✓
3. Personal
4. Grounding
5. Tools and equipment
6. Fires

B. Transmission and Distribution

1. Generating plant
2. High voltage transmission
3. Sub-station
4. Low voltage residential

C. Tools and Equipment--Basic

1. Screwdrivers
2. Pliers
 - a. Long nose
 - b. Bent nose
 - c. Lineman (side cutters)
 - d. Diagonal
3. Electrician's hammer
4. Wire strippers
 - a. Adjustable
 - b. Multipurpose
5. Rule
6. Wrenches
7. Threading tools
8. Awl
9. Drills
 - a. Brace and bits
 - b. Drill motor and bits
10. Saws
 - a. Hack
 - b. Hole
 - c. Keyhole
 - d. Reciprocal
11. Files
12. Soldering tools
 - a. Soldering gun
 - b. Soldering iron

D. Specialty Tools

1. Benders
 - a. EMT
 - b. Hickey
2. Pipe reamer
3. Pipe cutter
4. Plumb bob
5. Chisel
6. Knockout punches
7. Fish tape
8. Level
9. Meters
 - a. Neon test light
 - b. Volt-ohmmeter
 - c. Ammeter
 - d. Inductance couple meter

B. Wiring Equipment

1. Wire
 - a. Cable types
 - b. Sizing
 - c. Insulation
2. Switches
 - a. Single pole
 - b. 3-way
 - c. 4-way
 - d. Dimmer
 - e. Low voltage/push button
3. Receptacles
 - a. Duplex 125v, 15 amp
 - b. Dual voltage 125/250v, 20 amp
 - c. Air conditioning 250 volt, 30 amp
 - d. Range 125/250v, 50 amp
 - e. Dryer 125/250v, 30 amp
4. Wall plate
5. Outlet boxes
 - a. Handy
 - b. Extension
 - c. Octagon
 - d. Square
 - e. Box covers
 - f. Switch
6. Conduit
 - a. Rigid metallic
 - b. Non-metallic
 - c. Non-metallic sheathed
 - d. Flexible conduit
 - e. PVC
7. Electrical service
 - a. Weather head or cap
 - b. Race way
 - c. Meter base
 - d. Underground service
 - e. System grounding
 - f. Service entrance panel

F. Wiring Techniques

1. Electrical service
2. Rough-in
3. Branch-circuit wiring
4. Finishing wiring

G. Load Determination

1. Current requirements
2. Lighting circuits
3. Speciality circuits

VI. DIRECT CURRENT CIRCUITS

A. Review of Ohm's Law

B. Series Circuits

1. Equivalent resistance
2. Voltage dividers
3. Kirchoff's voltage law

C. Parallel Circuits

1. Equivalent resistance
2. Current dividers
3. Kirchoff's current law
4. Conductance

D. Series-Parallel Circuits

1. Equivalent resistance
2. Voltage drops and current
3. Designing practical circuits

E. Advanced Analysis Techniques (Optional)

1. Bridge circuits
2. Mesh analysis
3. Delta-tee conversions
4. Loop analysis
5. Superposition
6. Thevenin and Norton networks

F. Capacitors

1. Capacitor action
2. Construction
3. Rating
 - a. Working voltage
 - b. Capacitance
 - c. Tolerance
4. Types of capacitors

5. Transient response
 - a. Charging the capacitor
 - b. Discharging the capacitor
 - c. Time constants
6. Capacitors in series
7. Capacitors in parallel

VII. MAGNETISM

A. History of Magnetism

B. Magnetic Theory

1. Domains
2. Poles, fields, and flux
3. Law of magnetism

C. Magnetic Materials and Effect

1. Ferromagnetic
2. Paramagnetic
3. Diamagnetic
4. Magnetic shielding

D. Measuring Magnetism

1. Magnetomotive force
2. Flux density
3. Intensity
4. Reluctance
5. Permeability

E. Electromagnetic Effect

1. Relation to current
2. Magnetism in coil of wire
3. Electromagnetism
 - a. Cores
 - b. Strength
 - c. Polarity
4. Electromagnetic devices
 - a. Solenoid
 - b. Relays
 - c. Circuit breakers
 - d. Speakers
 - e. Meters
 - f. Bells and buzzers
 - g. Recording tape

F. Inductance

1. Induced EMF
2. Lenz's law
3. Measuring inductance
4. Effect of cores
5. Quality of coils
6. Transient response
7. Inductance in series
8. Inductance in parallel

VIII. TEST EQUIPMENT

A. Meter Fundamentals

1. Analog/pointer type
 - a. D'Arsonval
 - b. Iron vane
2. Digital/LED or LCD type
 - a. Analog to digital conversion
 - (1) Ramp method
 - (2) Dual-slope method
 - (3) Switched-resistor method
 - b. Counting
3. Voltmeters
 - a. Multipliers and ranging
 - b. Types of voltmeters and uses
 - (1) Volt-Ohm Milliammeter/VOM
 - (2) Electronic Voltmeters/EVM
 - c. AC measurements
4. Ammeters
 - a. Meter shunts and ranging
 - b. Types of ammeters
 - (1) D'Arsonval
 - (2) Iron vane
 - (3) Hot wire meter
 - c. Connections
5. Ohmmeter
 - a. Series
 - b. Shunt

B. Oscilloscopes

1. Construction
2. Operation
 - a. Function of controls
 - b. Calibration

C. Function/signal generator

1. Function generator uses
2. Signal generator uses

D. Transistor Tester

IX. AC CIRCUITS

A. Alternating Current Fundamentals

1. Waveforms
 - a. Sine waves
 - b. Square waves
 - c. Ramp waves
 - d. Triangle waves
2. Quantifying alternating currents
 - a. Frequency
 - b. Period
 - c. Wavelength
 - d. Peak value
 - e. Peak to peak
 - f. Effective or root-mean-square (RMS) value
 - g. Average value
 - h. Instantaneous value
 - i. Harmonics
3. Polyphase current
 - a. Wave forms
 - b. Uses
4. Voltage, current and power relationships

B. Capacitive Circuits

1. Reactance
2. Phase shift
3. Impedance
4. Apparent power
5. Graphic analysis techniques

C. Inductive Circuits

1. Reactance
2. Phase shift
3. Impedance
4. Apparent power
5. Graphic analysis techniques

D. Transformers

1. Mutual inductance - Lenz's Law
2. Physical construction
3. Turns ratio
4. Isolation and autotransformers
5. Multi-voltage transformers
 - a. Tapped
 - b. Multiple coils
6. Transformer applications
7. Power losses and efficiency

E. Tuned Circuits

1. Resonance
2. Series tuned circuit
 - a. Impedance curve
 - b. Frequency
 - c. Bandwidth and selectivity
3. Parallel tuned circuits
 - a. Impedance curve
 - b. Frequency response
 - c. Bandwidth and selectivity
4. Filters and filtering
 - a. High pass
 - b. Low pass
 - c. Band pass
 - d. Band reject
 - e. Frequency response and crossover

X. SEMICONDUCTOR FUNDAMENTALS

A. Semiconductor Materials

1. Pure semiconductors
2. Low temperature characteristics
3. High temperature characteristics
4. Doping semiconductors
5. N-type material
6. P-type material
7. Current in semiconductors

B. P-N Junction

1. Forming the junction
2. Depletion region
3. Barrier potential
4. Forward biased
5. Reverse biased
6. Avalanche breakdown

XI. ELECTRONIC DEVICES

A. Diodes

1. Characteristics of diodes
2. Types of diodes
 - a. Rectifiers
 - b. Switching
 - c. Zener
 - d. Light emitting diode
3. Diode ratings

4. Rectifier circuits
 - a. Half-wave rectifier
 - b. Full-wave rectifier
 - c. Bridge rectifier
 - d. Rectifier packaging
 - e. Diode clampers and limiters
5. Power supplies
 - a. Filtering
 - b. Regulation
 - c. Voltage multipliers
 - d. Voltage converters and inverters

B. Transistors

1. Bi-polar junction transistors
 - a. Operating theory
 - b. Types of bi-polar transistor
 - c. Uses of transistors
 - d. Basic circuits
 - e. Fabrication techniques
 - f. Operating parameters and conduction curves
 - g. Transistor testing
2. Field effect transistors
 - a. Junction field effect transistors
 - b. Depletion mode metal oxide semiconductors
 - c. Enhancement mode metal oxide semiconductors
 - d. Fabrication techniques
 - e. Operating parameters

C. Transistor Amplifier Circuits

1. Circuit types
 - a. Common-base
 - b. Common-collector
 - c. Common-emitter
 - d. Common-source
2. Biasing and load lines
3. Frequency response
4. Distortion
5. Coupling and feedback
6. Transistor driver circuits
7. Transistor switching circuits

D. Thyristors

1. Silicon controlled rectifiers
 - a. Construction
 - b. DC operation
 - c. AC operation
 - d. Applications

2. TRIAC
 - a. Construction
 - b. Operation
 - c. Applications
3. DIAC
 - a. Construction
 - b. Operation
 - c. Applications
4. Unijunction transistor
 - a. Construction
 - b. Operation
 - c. Applications
5. Thyristor ratings

E. Integrated Circuits

1. Fabrication techniques
 - a. Monolithic I.C.'s
 - b. Large scale integration I. C.'s
 - c. Hybrid
2. Properties and ratings
3. Applications
 - a. Digital I. C.'s
 - b. Analog I. C.'s
4. Operational amplifiers
 - a. Operational amplifiers
 - b. Differential amplifiers
 - c. Applications

F. Thermistors

1. Negative temperature coefficient thermistors
2. Uses
 - a. Thermal compensation
 - b. Heat sensing
3. Positive temperature coefficient thermistors

G. Opto-Electric Devices

1. Uses
 - a. Isolation
 - b. Communication
 - c. Safety
 - d. Limit distortion
2. Types
 - a. Light-activated SCR
 - b. Opto-isolators
 - c. Infra-red light-emitting diodes
 - d. Light-activated transistors
 - e. Photoresistors
 - f. Lasers
 - g. Light-emitting diodes

XII. CIRCUIT FABRICATION

A. Schematic Diagrams

1. Understanding component symbols
2. Breadboarding

B. Printed Circuit Board

1. Materials
 - a. Copper electroplating
 - b. Gold plating
 - c. Tin-lead plating
 - d. Tin-nickel plating
2. Printing
 - a. PC board cleaning
 - (1) Chemical cleaning
 - (2) Degreasing
 - (3) Acid dipping
 - b. Photoresists
 - c. Screen printing
 - d. Contact print
 - e. Rub-off transfer
3. Etching
 - a. Etching solutions
 - b. Equipment and techniques
 - c. Etching safety
4. Drilling

C. Soldering

1. Fluxes
2. Alloys
3. Soldering techniques

D. Wire Wrapping

E. Point-to-Point Wiring

XIII. INTRODUCTION TO COMPUTERS

A. History of Computational Machines

B. Processing Information in a Computer

1. Central processing unit (CPU)
2. Read-only-memory (ROM)
3. Random access memory (RAM)

C. Hardware

1. Classes of computers
 - a. Main frame
 - b. Microcomputer
 - c. Microprocessor
2. External memory devices
 - a. Cassette
 - b. Disc
 - c. Hard disc
 - d. Tape
 - e. Card readers
3. Input/output devices
 - a. Video monitors/CRT
 - (1) Black and white
 - (2) Green phosphorous
 - (3) Color
 - b. Modems
 - c. Printers
 - (1) Dot matrix
 - (2) Daisy wheel
 - (3) Continuous band/metal band
 - (4) Ink jet
 - d. Joystick and paddles
 - e. Keyboards
 - f. Voice synthesizers

D. Software

1. Programming languages
 - a. Basic
 - b. Pascal
 - c. Fortran
 - d. Cobol
 - e. Assembler
2. Programming logic
3. Software sources
 - a. Commercial
 - b. User groups
 - c. Self-generated

XIV. ROBOTICS: AN INTRODUCTION FOR YOUR CLASSROOM

A. What is Robotics

1. What is a robot
2. Components of a robot
 - a. Manipulator
 - b. Controller
 - c. Power source

3. Work envelope

B. Types of Robots

1. Non-servo controlled
2. Servo controlled
3. Remote controlled

C. Robot Applications

1. Industrial
 - a. Spot welding
 - b. Arc welding
 - c. Assembly
 - d. Material handling
2. Industrial Arts
 - a. Spot welding
 - b. Arc welding
 - c. Electronic component assembly
 - d. Machine loading and unloading
 - e. Line production activities
 - (1) Finishing process
 - (2) Material handling
 - (3) Assembly
 - (4) Quality control
 - f. Research and development activities
 - g. Metal casting processes
 - (1) Pouring
 - (2) Shake-out
 - (3) Mold venting
 - h. Laboratory experimentation

D. Social Economic Impact

1. What cybernetics means to industry
2. Productivity levels

XV. INDUSTRIAL ELECTRICITY/ELECTRONICS

A. Generators

1. Theory of operation
 - a. AC generators
 - b. DC generators
2. Basic construction
3. Types of generators
4. Applications

B. Motors

1. Theory of operation
 - a. DC motors
 - b. AC motors

2. Types of motors
 - a. DC
 - b. AC
3. Motor construction
4. Motor ratings
5. Application
6. Motor starters
7. Care and maintenance
8. Over-current protectors

C. Resistance Devices

1. Resistance heaters
2. Arc welding
3. Carbon arc
 - a. Electric arc furnaces
 - b. Carbon arc lamps
 - c. Carbon arc welding

D. Electrochemical Reactions

1. Electrolysis
 - a. Production of chemicals
 - b. Metal reclamation
2. Electroplating
3. Metal refinement

E. High Frequency Heating

1. Induction heating
2. Microwave heating

F. Lamps and Lighting

1. Incandescent lamps
2. Ionized gas lamps
 - a. Noble gasses
 - b. Metal vapors

XVI. CAREERS

A. Engineering

1. Nature of work
2. Where employed
3. Employment outlook

B. Technician

1. Television
2. Radio
3. Communications

C. Utilities

1. Power plant
2. Transmission and distribution
3. Consumer services

D. Telephone Companies

1. Installers and repair specialists
2. Operators
3. Central office installers
4. Line construction and maintenance

E. Manufacturing

1. Managerial
2. Technical
 - a. Lab technicians
 - b. Draftsmen
 - c. Technicians
3. Assembly
4. Machining
5. Fabricating
6. Processing
7. Testing

F. Construction Electricians

G. Maintenance Electricians

H. Broadcasting

I. Teachers

UNIT I: ELECTRICITY/ELECTRONICS SAFETY

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL(S)	GENERAL UNIT OBJECTIVES
<p>The purpose of this unit is to introduce the importance of integrating safety as part of the Electricity/Electronics program.</p> <p>Students should be constantly reminded that safety must become an everyday consideration in this program and any industrial arts or vocational education laboratory.</p> <p>With safety the first unit of this curriculum, it is our intent for safety to be reviewed and taught in every unit of the curriculum that is necessary.</p>	<p>To make the student aware of the safety practices and hazards in working with electricity/electronics.</p>	<p>Upon completion of this unit, students should be able to:</p> <ol style="list-style-type: none">1. Understand course content of personal and hazard safety.2. Be familiar with first aid procedures.3. Identify color codes.4. Observe and comply with fire prevention practices.5. Student must score at least 70 percent to pass unit test.

23

UNIT 1: ELECTRICITY/ELECTRONIC SAFETY

5 hours

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>At the conclusion of this unit, the student should be able to:</p> <ul style="list-style-type: none"> Develop responsible behavioral attitudes required for electronics/electricity. Identify personal safety practices. List personal protective devices. Explain importance of good housekeeping. Have a thorough understanding of electrical safety hazards and prevention measures. List example of common unsafe acts that result in electrical accidents or injury. Identify appropriate types of fire extinguishers. List the location of fire alarms and explain the proper procedure to evacuate the lab/classroom in case of fire. 	<p>A. Personal Safety Practices</p> <ol style="list-style-type: none"> State safety laws OSHA safety laws Electric shock Current and its effects on the human body Protection <ol style="list-style-type: none"> body (all parts) clothes jewelry Housekeeping <p>B. Safety Hazards</p> <ol style="list-style-type: none"> Hazards condition <ol style="list-style-type: none"> wet area defective equipment reporting procedure Ground fault <ol style="list-style-type: none"> electrical tool safety device Live circuits Chemicals <ol style="list-style-type: none"> group A atmosphere group B atmosphere group C atmosphere Group D atmosphere Fire safety <ol style="list-style-type: none"> fire extinguishers <ol style="list-style-type: none"> types use maintenance class of fires <ol style="list-style-type: none"> class A class B class C class D 	<p>*Take notes</p> <p>Explain electric shock and ways of prevention.</p> <p>Discuss current and its effects on the human body at 120 volt, 60 hertz (cycle).</p> <p>Organize a clean up roster for housekeeping.</p> <p>Discuss electrical hazards. List unsafe electrical conditions. List prevention for electrical hazards.</p> <p>Explaining grounding tools and devices.</p> <p>Discuss the proper procedure for working around live circuits. Name some chemicals. Groups</p> <p>Practice evacuation of lab/classroom in case of fire. List the location of fire alarms, and extinguishers.</p> <p>Match the fire with the proper extinguisher.</p> <p>*Use your notebook.</p>	<p>*Present student with charts and safety rules. Show film.</p> <p>List laws on chalk board. *Chart of current and its effects on the human body.</p> <p>Make chart and explain duties.</p> <p>*Show films on safe and unsafe conditions.</p> <p>Discuss grounding. Lead group discussion on live circuits and chemicals.</p> <p>Hold classroom fire drills and discuss class of fires. *Chalkboard</p> <p>*Use charts, overhead projector, and transparencies.</p>	<p>Self made or local teacher supply.</p> <p>(#35), p. 4 (#26), p. 211 (#24), p. 14</p> <p>(#30), p. 20 (#25), p. 7</p> <p>(#35), p. 4 (#36), p. 47 (#26), pp. 208-212</p> <p>(#5), pp. 24-25 (24), p. 301 (#26), pp. 195, 206-207 (#21) Article 500</p> <p>Local fire station, invite a fireman to speak to class.</p>

UNIT 1: ELECTRICITY/ELECTRONIC SAFETY (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Identify each color code.</p>	<p>C. Color Codes 1. red 2. yellow 3. green 4. orange 5. purple</p>	<p>Define and discuss tools, machines, equipment, and apparatus with color code section.</p>	<p>Explain where each color of the color code will be found. *Chalkboard</p>	<p>(26), p. 5</p>
<p>Identify safety factors for all electrical tools. List the most common unsafe acts.</p>	<p>D. Mechanical Safety Tools 1. Hand tools a. appropriate tools for the job b. good condition 2. Power tools a. all power tools should be grounded b. excessive pressure should never be used with portable electrical tools c. extension cord (1) plugging (2) disconnect</p>	<p>List electrical/hand/power tools in notebook with safety rules. Discuss tool safety.</p>	<p>Demonstration of safe and correct use. Stress grounding of power tools.</p>	<p>(#36), pp. 15-27 (#22), pp. 370-373</p>
<p>Identify the types of electrical meters and their safety rules.</p>	<p>3. Meters a. ammeter b. voltmeter c. ohmmeter d. multimeter e. wattmeter f. digital multimeter</p>	<p>Hands on experience with meters. Safety do's and don't. Proper way to test equipment. Observe polarity in dc circuit. Selecting the dc ranges.</p>	<p>Identify the proper connection of polarity and ranges. Show film.</p>	<p>(#24), pp. 207-213 (#5), pp. 83-84 (#13), pp. 153-154 Films on meters.</p>
<p>List the common unsafe acts of ladder use.</p>	<p>4. Ladders a. step ladders b. extension</p>	<p>Discuss ladder and safety.</p>	<p>Discuss parts and safe use.</p>	
			<p>*Use charts, overhead projector, and transparencies.</p>	

25

UNIT I: ELECTRICITY/ELECTRONIC SAFETY (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Understand the responsibility of emergency procedures.</p> <p>Identify when to act, and how to act.</p> <p>Identify equipment failure and take appropriate precautionary action.</p>	<p>E. Emergency Procedures</p> <ol style="list-style-type: none"> 1. Bleeding <ol style="list-style-type: none"> a. blood spurts b. blood flows c. blood oozes 2. Breaks or fractures <ol style="list-style-type: none"> a. simple fractures b. compound fractures 3. Open wounds <ol style="list-style-type: none"> a. minor cuts and abrasions b. serious wounds c. puncture wounds 4. Electrical shock <ol style="list-style-type: none"> a. shut off the current b. removing victim c. artificial respiration 5. Equipment failure <ol style="list-style-type: none"> a. wrong size or type b. overloading c. test equipment d. extension cords 	<p>Discuss emergency procedures and some general first aid.</p> <p>List unsafe electrical conditions that could lead to equipment failure.</p>	<p>Identify bleeding, breaks, wounds, and electrical shock.</p> <p>Discuss unsafe electrical conditions stated by student.</p>	<p>Invite a nurse to speak to students.</p> <p>School library first aid information.</p> <p>(#23), pp. 15-20 (#10), p. 371 (#24), pp. 207-213</p> <p>Invite the school maintenance supervisor to speak in class.</p>
<p>26</p>	<p>F. Review Unit</p>	<p>Work study sheet</p>	<p>Review unit for test.</p>	<p>Teacher made test.</p>
<p>Student must make 70 percent to pass.</p>	<p>G. Test on Unit</p>	<p>Test on unit.</p> <p>Review test.</p>	<p>Simple questions.</p> <p>Review test.</p>	

UNIT II: MATHEMATICS REVIEW

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL(S)	GENERAL UNIT OBJECTIVES
<p>This unit is designed to review with the student those mathematical skills that will be used in this course. Proficiency in these areas is essential for success in electricity/electronics.</p> <p>Special attention should be paid to operations involving unit prefixes as they are widely used throughout electricity/electronics texts and literature.</p>	<p>The goal of this unit is to review with the students the mathematical skills that will be applied throughout this course.</p>	<p>Upon completion of this unit the student will be able to:</p> <ol style="list-style-type: none"> 1. Perform arithmetic function on fractions, whole numbers and decimal numbers. 2. Express numbers in scientific notation or by use of unit prefixes and be able to convert from one prefix to another. 3. Use rules of basic Algebra to solve equations. 4. Determine the square root of a number. 5. Student must score a minimum score of 70 percent on a unit test.

27

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
Students will be able to perform arithmetic functions on fractions, scoring a minimum of 75 percent on unit test.	A. Fractions 1. Expressing numbers as fractions 2. Finding common denominators 3. Adding fractions 4. Subtracting fractions 5. Multiplying and dividing fractions	Worksheets on all areas to review and practice skills See Appendix #5	Demonstrate each skill to students.	(#37), p. 295 (#37), pp. 313, 315 (#37), pp. 307, 310
Students will be able to multiply and divide decimal numbers to 10 thousandths place and point off correctly.	B. Dividing Decimal Numbers 1. Determining decimal place 2. Rounding off			
Students will be able to express numbers in scientific notation in scientific notation and correct numbers expressed in scientific notation as decimal number.	C. Multiplying Decimal Numbers D. Scientific Notation 1. Expressing decimal numbers in scientific notation 2. Converting numbers in scientific notation to decimal numbers			
Students will be able to add, subtract, multiply and divide numbers expressed in scientific notation.	3. Converting two numbers in scientific notation to the same power 4. Adding and subtracting numbers expressed in scientific notation 5. Multiplying and dividing numbers in scientific notation			(#37), p. 291 (#12), p. 26
Students will be able to name unit prefixes, give their values and convert from one unit prefix to another.	E. Unit Prefixes 1. Prefixes and their value 2. Prefix symbols and abbreviations 3. Converting to prefixed units 4. Converting to basic units from prefixed units 5. Converting prefixed units to prefixed units			(#12), p. 27,

UNIT II: MATHEMATICS REVIEW (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
Students will be able to solve equations for a given variable.	F. Basic Algebra			(#37), p. 123
	1. Solving equations by the multiplication property of equality			
	2. Solving equations by the division property of equality			(#37), p. 125
	3. Transforming equations by division or multiplication			
Students will be able to use substitution principle in deriving equations.	4. Substitution of one value for another in an equation			(#37), p. 113
	G. Square Roots			
Students will be able to calculate the square root of a number to the thousandths place.	1. Square roots of whole numbers			
	2. Square roots of decimal numbers			
	3. Square roots of numbers in scientific notation			
	H. Unit Review			
	I. Unit Test			

29

UNIT III NATURE OF ELECTRICITY

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL(S)	GENERAL UNIT OBJECTIVES
<p>This unit is intended to familiarize industrial arts students with the nature of electricity and to define electronics:</p>	<p>To provide students with the fundamental knowledge of matter that allows electricity to exist.</p>	<p>Upon completion of this unit, students should be able to:</p> <ol style="list-style-type: none">1. Define electronics and to list five different fields into which the broad field of electronics is divided.2. Define DC, AC, molecule, element, atom, electron, proton, neutron, nucleus, and ion.3. Define conductors and insulators and explain where they are used.4. Define electrical quantities of charge, voltage, current, resistance and power and mathematically relate them.

UNIT III. NATURE OF ELECTRICITY

15 hours

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>At the conclusion of this unit, the student should be able to:</p> <p>Identify matter in three different states.</p> <p>Understand basic building materials from which all matter is constructed.</p>	<p>A. Energy and Work</p> <p>B. Structure of Matter</p> <ol style="list-style-type: none"> 1. Elements 2. Compounds 3. Atoms 4. Subatomic particles <p>C. Electrical Fields</p> <ol style="list-style-type: none"> 1. Ions 2. Static electricity 3. Law of charges 4. Measuring charges 5. Industrial use 	<p>*Note taking (in notebook)</p> <p>Define properties of matter.</p> <p>Name some compounds.</p> <p>List some elements.</p> <p>Draw a schematic diagram of an atom of hydrogen, etc.</p> <p>Discuss electrical fields.</p> <p>List and define types of static electricity.</p> <p>Name types of charges.</p>	<p>Lecture:</p> <p>*List properties to be defined.</p> <p>Check work on compounds and elements.</p> <p>*Demonstrate static electricity.</p>	<p>(*12), pp. 7-8</p> <p>(*6), pp. 4-5</p> <p>(*12), p. 5</p> <p>(*24), pp. 1-23</p> <p>(*21), pp. 1-176</p> <p>1-118</p>
<p>Display awareness of electrical current and properties.</p>	<p>D. Electrical Current</p> <ol style="list-style-type: none"> 1. Electron 2. Ion 3. Measuring current 	<p>Explain the flow of electrical charge from one point to another.</p> <p>Discuss current flowing past a point, in a specific length of time.</p>	<p>*Discuss electrical current.</p>	<p>(*5), pp. 89-90</p> <p>(*21), pp. 8-6, 8-10</p>
<p>Develop a working knowledge of good conductors and insulators.</p>	<p>E. Conductors and Insulators</p> <ol style="list-style-type: none"> 1. Good conductor materials 2. Good insulators 	<p>Explain substances which have large numbers of free electrons and very few free electrons.</p>		
<p>Understand the function of a capacitor and how electrical potential is measured.</p>	<p>F. Electrical Potential</p> <ol style="list-style-type: none"> 1. What is electrical potential 2. Measuring electrical potential 3. Producing electrical potential 	<p>Discuss the holding of electricity and how it is measured.</p>	<p>Discuss electrical potential.</p> <p>Describe sources of electricity.</p>	<p>(*24), pp. 115-118</p>
<p>Identify the roles of resistance in circuits:</p> <p>Describe how the length, cross sectional area, resistivity and temperature of a substance effect its resistance.</p>	<p>G. Resistance</p> <ol style="list-style-type: none"> 1. Specific resistivity 2. Measure resistivity 3. Resistors <ol style="list-style-type: none"> a. kind b. rating c. color code 	<p>Explain how resistance limits the flow of electrons through a circuit.</p>	<p>*Describe resistance.</p>	<p>(*12), pp. 31-33</p> <p>(*5), pp. 49-50</p>
			<p>*Use charts, overhead projector, and transparencies.</p>	

UNIT III: NATURE OF ELECTRICITY (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>State Ohm's law. Write three equation forms of Ohm's law.</p> <p>Understanding electrical power, verify the three power equations.</p>	<p>H. OHM'S Law</p> <ol style="list-style-type: none"> 1. Deriving Ohm's law 2. Using Ohm's law <p>I. Power</p> <ol style="list-style-type: none"> 1. What is power 2. Relation to voltage and current 3. Measuring power 4. Relationship to energy <p>J. Review Unit</p> <p>I. Test</p>	<p>Study the formulas: For voltage (E or V) For current (I) For resistance (R)</p> <p>Practice problems as directed by teacher. Discuss three common equations for determining the power in a circuit.</p> <p>Test review</p> <p>Test</p>	<p>Give student work sheet for problem solving.</p> <p>*Identify power.</p> <p>Pass out review sheet.</p> <p>Use charts, overhead projector, and transparencies.</p>	<p>(#5), pp. 64-66 (#12), p. 22 (#24), pp. 16-17</p> <p>(#24), pp. 20-22</p>

32

e

UNIT IV: METERS AND MEASURING

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL(S)	GENERAL UNIT OBJECTIVES
The purpose of this unit is to introduce the student to meters and measuring.	The student should be familiar with most types of meters and able to read the scale of that meter.	Upon completion of this unit the student should be able to: <ol style="list-style-type: none">1. Identify several types of meters.2. Describe the operation of a multimeter.3. Know the functions of and how to use both DC and AC meters.4. Know the function of and how to use voltmeters, ohmmeters, and digital meters.

33

UNIT IV. METERS AND MEASURING 5 hours

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>At the conclusion of this unit the student should be able to:</p> <p>Interpret the reading of all meters and scales.</p> <p>Understand the operation of the digital meter and how to use it. Identify the functions and how to use an ammeter.</p> <p>Identify the functions and how to use a voltmeter.</p> <p>Identify meter error and ways to correct them.</p>	<p>A. Reading Meters</p> <ol style="list-style-type: none"> 1. Analog meters <ol style="list-style-type: none"> a. linear scale b. nonlinear scale 2. Digital meters <ol style="list-style-type: none"> a. reading numbers on a cyetal display b. five AC & DC voltage and current ranges <p>B. Using Meters</p> <ol style="list-style-type: none"> 1. Ammeters <ol style="list-style-type: none"> a. accuracy range b. accuracy fall off c. connection 2. Voltmeter <ol style="list-style-type: none"> a. one milliamperes use as a voltmeter b. multi-range voltmeter c. connection 3. Multimeter <ol style="list-style-type: none"> a. combination of meters b. all meters have similar controls 4. Ohmmeters <ol style="list-style-type: none"> a. probes b. zero adjust c. connection 5. Meter error <ol style="list-style-type: none"> a. loading error b. parallax error 	<p>*Use notebook (note taking)</p> <p>Identify and read scales of an analog meter. Draw type of scale. List the function of a digital meter.</p> <p>List ways in which you can use an ammeter. Include the operation.</p> <p>*Use notebook (note taking) Discuss operation and the reading of the voltmeter.</p> <p>List functions that can be performed with a multimeter.</p> <p>Observe pointer image in a mirror.</p>	<p>*Demonstrate how the meters are read. Identify parts and controls.</p> <p>Demonstrate proper meter handling and use.</p> <p>Explain meter error.</p> <p>*Use charts, overhead projectors, and transparencies.</p>	<p>(#18), Unit 6, pp. 8-10</p> <p>(#10), Unit 6, pp. 16-17</p> <p>(#18), Unit 6, pp. 30-32</p> <p>(#18), Unit 6, pp. 41-43</p>

UNIT IV: METERS AND MEASURING (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Identify safety rules and cares in using meters.</p>	<p>C. Meter Care</p> <ol style="list-style-type: none"> 1. Handling meters <ol style="list-style-type: none"> a. probes b. proper movement 2. Connecting meters 3. Setting and adjusting <p>D. Unit Review</p> <p>E. Unit Test</p>	<p>Review safety (included). List procedures used in connecting meters, testing for full-scale deflection.</p> <p>Test review</p>	<p>Propose questions about meter care after safety review on meters.</p> <p>Pass out review sheet.</p> <p>Use charts, overhead projector, and transparencies.</p>	

35

UNIT V: RESIDENTIAL ELECTRICITY

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL(S)	GENERAL UNIT OBJECTIVES
<p>This unit is intended to familiarize the learner with residential electricity. The student will perform jobs, techniques, applications, and service installations.</p> <p>Teachers should be aware of the importance of using the correct nomenclature, as well as the need for thoroughness in initial demonstration.</p>	<p>Students will be given the opportunity to explore, identify, and understand a variety of techniques, through handling tools, materials, and meters.</p>	<p>Upon completion of this unit, students should be able to:</p> <ol style="list-style-type: none">1. State or list safety precautions to be observed when working with electricity. (Tool, circuit, etc.)2. Demonstrate an understanding of load per circuit.3. Identify material used in house wiring.4. Pass unit test with a score of 70 percent or better.

36

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>At the conclusion of this unit the student should be able to discuss the importance of safety.</p>	<p>A. Safety</p> <ol style="list-style-type: none"> 1. First aid 2. Hazard 3. Personal 4. Grounding 5. Tool and equipment 6. Fires 	<p>*Use notebook (note taking) Review rules that apply to house wiring from unit one.</p>	<p>*Stress safety rules that apply to house wiring.</p>	<p>(#35), pp. 12-552 (#36), pp. 3-14</p>
<p>To understand the transmission of electricity from generating plant to home or large factories.</p>	<p>B. Transmission System</p> <ol style="list-style-type: none"> 1. Generating plant <ol style="list-style-type: none"> a. step up substation b. transformer 2. High voltage transmission <ol style="list-style-type: none"> a. large factories and stores b. transformer 3. Low voltage <ol style="list-style-type: none"> a. residential and small stores b. step down transformer 4. Household electrical system (planning) <ol style="list-style-type: none"> a. make blueprint b. symbols 	<p>Discuss the need and importance of electricity. Sketch a diagram of the delivery of electricity from a generating plant to a home.</p> <p>Draw plans for house wiring.</p>	<p>Lecture the transmission system of electricity from the generating plant to home.</p>	<p>Invite a lineman to speak to class. (#24), pp. 187-193 (#36), pp. 132-135</p>
<p>At the conclusion of this unit the student should be able to:</p> <p>Identify common hand tools used in electrical wiring. Know safe use of hand tools and specialty tools.</p>	<p>C. Tools and Equipment (Basic)</p> <ol style="list-style-type: none"> 1. Screwdrivers <ol style="list-style-type: none"> a. flat blade b. phillips (cross point) c. stubby 2. Pliers <ol style="list-style-type: none"> a. long nose b. bent nose c. lineman pliers d. diagonal e. groove joint f. combination 	<p>*Use notebook (note taking) Discuss the use of tools.</p> <p>Use tools to perform simple tasks involved in house wiring.</p>	<p>*Stress the right tool for the right job.</p> <p>*Demonstrate and identify the parts of each tool.</p> <p>*Use charts, overhead projectors, and transparencies.</p>	<p>(#31), p. 275 (#20), pp. 365-368 (#20), pp. 189-192</p> <p>(#36), pp. 15-28</p> <p>(#24), pp. 370-373</p>

UNIT V: RESIDENTIAL ELECTRICITY (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Understand the units of measurement.</p>	<ul style="list-style-type: none"> 3. Electrician hammer 4. Wire strippers <ul style="list-style-type: none"> a. cable b. multipurpose c. adjustable 5. Rule <ul style="list-style-type: none"> a. tape measure (retractable) b. folding 6. Wrenches <ul style="list-style-type: none"> a. Allen b. open end c. box end d. adjustable 7. Threading tools 8. Punch and awls 9. Drill and bits <ul style="list-style-type: none"> a. brace and bits b. drill motor and bits 10. Saws <ul style="list-style-type: none"> a. hack b. hole c. keyhole d. reciprocal 11. Files <ul style="list-style-type: none"> a. double cut b. single cut 	<p>Practice by measuring objects in the classroom.</p>		<p>(#36), pp. 144-148</p>
<p>Identify the techniques of soldering and using a soldering iron or gun.</p>	<ul style="list-style-type: none"> D. Specialty tools <ul style="list-style-type: none"> 1. Soldering <ul style="list-style-type: none"> a. iron b. pencil c. gun 	<p>Discuss the material used in soldering:</p> <ul style="list-style-type: none"> flux acid flux rosin core tin and lead 	<p>*Demonstrate by showing material for soldering.</p> <p>*Give measuring problem to class.</p> <p>*Use charts, overhead, projectors, and transparencies.</p>	

38

UNIT V: RESIDENTIAL ELECTRICITY (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Explain the application of meters in house wiring.</p>	<ol style="list-style-type: none"> 2. Pipe reamer 3. Pipe cutter 4. Bonders <ol style="list-style-type: none"> a. EMT b. Hickey c. heater (Plastic) 5. Plumb bob 6. Chisel 7. Knock out punches 8. Fish tape 9. Level 10. Meters <ol style="list-style-type: none"> a. neon test light b. volt ohmmeter c. ammeter d. multimeter e. inductance couple meter 	<p>*Use notebook (not taking)</p> <p>Name the purpose or use of each tool.</p> <p>Review Unit IV, Meters and Measuring. Identify each meter and its purpose.</p>	<p>*List the name of meter on the chalkboard or handout sheet.</p>	
<p>At the conclusion of this unit, the student should be able to:</p> <p>Understand the purpose of insulation for wire.</p> <p>Name the types of switches and receptacles that are used for household electric service.</p>	<p>B. Wiring Equipment</p> <ol style="list-style-type: none"> 1. Wire <ol style="list-style-type: none"> a. cable type b. size c. insulation 2. Switches <ol style="list-style-type: none"> a. single pole b. 3-way c. 4-way d. dimmer e. low voltage 3. Receptacles <ol style="list-style-type: none"> a. duplex b. dual voltage c. air condition d. range e. dryer 	<p>List the different types of wire and size. Identify the most common use of each type of wire.</p> <p>List the switches found in your home and at school.</p> <p>Discuss receptacle types and where they are used.</p>	<p>Lecture:</p> <p>Use simple wire for student to identify.</p> <p>Discuss switches and receptacles and their uses.</p> <p>*Use charts, overhead projectors, and transparencies.</p>	<p>(#36), pp. 163-165 (#24), pp. 197-198</p> <p>(#36), pp. 168 & 176 (#24), pp. 242-245</p> <p>(#36), pp. 183-187</p>

UNIT V: RESIDENTIAL ELECTRICITY (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
Identify types of wall plates.	4. Wall plates	List advantages of wall plates.		
Understand the use of boxes and their types.	<ul style="list-style-type: none"> a. single toggle b. double toggle c. single toggle and duplex receptacles d. weatherproof plates 	List ways to use outlet boxes.		
Understand that conduit protects electrical wire.	5. Outlet boxes	List ways in which conduit protected cable is used indoors and outdoors.		(#24), pp. 196-198
Understand the purpose of the service panel.	<ul style="list-style-type: none"> a. handy b. extension c. octagon d. square e. box covers 	Discuss the service drop.		(#24), pp. 192-196 (#36), pp. 264-267
Use and be familiar with the National Electric Code.	6. Conduit	Trace electricity from the distribution panel through the home by branch circuits. Hook-up selected circuits and check applications using proper techniques.	Demonstrate electrical service from the service panel through branch circuits.	(#36), Unit IV, Chapters 1-15
Understand the role of Underwriters Laboratories, the importance of UL approval and NEC.	<ul style="list-style-type: none"> a. rigid metallic b. nonmetallic c. flexible d. nonmetallic sheathed e. P.V.C. (plastics) 	List the number of light, plugs, dryer, etc. on a circuit.	Study sheet or questions	(#27), Art. 220-19 Art. 220; Part 13, Chapter 9.
	7. Service Panel	Review unit	Administer test.	
	<ul style="list-style-type: none"> a. weatherhead b. mast c. meter base d. service entry e. grounding system 	Review test	Review test.	
	F. Electric Service Wiring Techniques			
	<ul style="list-style-type: none"> 1. Rough in 2. Branch circuit wiring 3. Hanging electrical fixtures 			
	G. Load Determination			
	<ul style="list-style-type: none"> 1. Current 2. Circuit 3. Specialty circuits 			
	H. Review Unit for Test			
	I. Test on Unit			

UNIT VI: DIRECT CURRENT CIRCUITS

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL(S)	GENERAL UNIT OBJECTIVES
<p>This unit is designed to present to the student direct current circuit analysis techniques. Also included is a study of capacitors in direct current circuits.</p>	<p>The goal of this unit is to introduce basic and advanced techniques of circuit analysis involving resistance and capacitance.</p>	<p>Upon completion of this unit the student will be able to:</p> <ol style="list-style-type: none"> 1. Determine the equivalent resistance of series, parallel, and series-parallel circuits. 2. Determine branch currents and load resistor voltage drops in series, parallel and series-parallel circuits. 3. State Kirchoff's Laws and use in circuit analysis. 4. Build practical circuits in order to test and confirm these laws. 5. Be able to use varied and advanced circuit analysis techniques. 6. Name several types of capacitors, how they are constructed and analyze DC circuits containing them. 7. Student must pass unit test with 70 percent or better.

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
Students will indicate the ability to work Ohm's Law problems.	A. Review Ohm's Law.	Work problems as class.	Review Ohm's Law application. Work problems on board.	(#12), p. 35 (#16), p. 40
Students will be able to define and recognize series circuits.	B. Series Circuit	Have students draw series circuits.	Draw several series circuits on board.	(#12), pp. 53-83 (#16), p. 55
Students will be able to calculate the equivalent resistance of series circuits.	1. Definition of series circuit 2. Current in series circuit 3. Equivalent series resistance	Students calculate total resistance of given circuits.	Give examples of practical series circuits. Demonstrate method for calculating.	(#12), p. 88 (#16), p. 56
Students will be able to state Kirchoff's Voltage Law and Ohm's Law, to calculate missing voltage drops in a series circuit. Students will be able to apply principle of voltage division to series circuits.	4. Voltage drops in series circuits 5. Kirchoff's Voltage Law 6. Polarity of voltage drops 7. Voltage dividers a. Voltage division b. Loaded voltage dividers	Students work problems involving voltage drops and Kirchoff's Law. Students confirm Kirchoff's Law using lab exercises. Students work problems involving voltage division. Confirm voltage division using lab exercises.	Construct circuit and use ohmmeter to indicate property of equivalent resistance. Discuss Kirchoff's laws in lab exercise.	(#12), pp. 89-90 (#16), p. 58
Student will be able to calculate power use in series circuit.	8. Power in series circuits a. power used by individual components b. total power used by series circuits	Confirm using lab exercises.	Demonstrate problems on chalkboard and explain.	(#12), p. 89 (#16), p. 120
Students will be able to design and construct a working series circuit to specifications.	9. Designing series circuits a. apply the laws to real world b. troubleshooting the circuit	Design and build two and three component series circuits to given specifications.		(#16), p. 63 (#12), p. 87
Students will be able to define and recognize parallel circuits and list the major characteristics of parallel circuits.	C. Parallel Circuits 1. Definition of parallel circuits 2. Voltage drops on parallel circuits 3. Branches 4. Conductance		Draw simple parallel circuit on board and use to demonstrate principles. Build simple parallel circuit and use to demonstrate principles.	(#16), pp. 76, 83 (#12), p. 95

VI. DIRECT CURRENT CIRCUITS (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Student will be able to determine the equivalent resistance, branch currents, and power use of parallel circuits.</p> <p>Student will be able to: Give Kirchoff's current law Design and build a parallel circuit to specifications. Determine the equivalent resistance of series-parallel circuits.</p> <p>Determine voltage drops, branch currents and power use in series-parallel circuits.</p> <p>Design and build a loaded voltage divider circuit to given specifications.</p> <p>Students will be able to analyze bridge circuits to determine resistance, voltages, or currents.</p>	<p>5. Equivalent resistance 6. Branch currents 7. Total current 8. Power in parallel circuits a. total power b. power consumed by individual components 9. Kirchoff's current law</p> <p>D. Series-Parallel Circuits 1. Equivalent resistance by series and parallel rules on portions of circuit 2. Equivalent resistance by Ohm's Law $R_{eq} = \frac{E_T}{I_T}$ 3. Voltage drops on series strings, components or branches 4. Power use by components 5. Designing loaded voltage dividers</p> <p>E. Advanced Analysis Techniques 1. Bridge circuits a. defining bridge circuits b. calculating total resistance c. balanced bridge d. calculating missing resistance in balanced bridge e. calculating voltage drops and currents in bridge circuits</p>	<p>Work problems involving parallel circuits. Confirm laws pertaining to parallel circuits through lab exercise.</p> <p>Students will build parallel circuit to specifications.</p> <p>Worksheet on equivalent resistance.</p> <p>Students will wire a series-parallel exercise to confirm laws.</p> <p>Design and build circuit to specifications.</p> <p>Work problems involving bridge. Analyze methods. Perform lab exercise to confirm laws.</p>	<p>Pass out and explain what is expected in lab activity.</p> <p>Demonstrate method on several different circuits.</p> <p>Pass out lab activity.</p> <p>Demonstrate each technique to the class.</p>	<p>(*16), p. 78 (*12), p. 98</p> <p>(*16), p. 93 (*12), p. 102</p> <p>(*16), p. 122</p>

VI DIRECT CURRENT CIRCUITS (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Students will be able to: Analyze two-mesh circuits by mesh analysis.</p>	<p>2. Mesh Analysis a. mesh currents b. mesh circuits c. simultaneous equations d. writing mesh equations</p>	<p>Work problems involving mesh analysis techniques.</p>		
<p>Analyze tee circuits and convert Delta to Tee and Tee to Delta.</p>	<p>3. Delta-Tee circuits a. Tee circuits b. Delta circuits c. Delta-Tee conversions d. Tee-Delta conversions</p>	<p>Work analysis problems involving skills of Delta-Tee transformations.</p>		<p>(#16)p. 195</p>
<p>Analyze circuit by loop analysis.</p>	<p>4. Loop analysis a. loop currents b. writing loop equations c. solving for voltage drops d. solving for currents</p>	<p>Work loop analysis problems</p>		
<p>Students will be aware of superposition, Thevenin, and Norton methods of circuit analysis.</p>	<p>5. Other techniques a. superposition b. Thevenin theorem c. Norton's theorem</p>	<p>Students perform each type of analysis.</p>	<p>Illustrate the use of each with simple example problems.</p>	<p>(#16),p. 177</p>
<p>Students will be able to explain capacitor action.</p>	<p>F. Capacitance 1. Dielectric field 2. Electrostatic induction 3. Charging and discharging of capacitors</p>		<p>Demonstrate capacitors ability to store charge.</p>	<p>(#16), p. 420 (#12),p. 228 (#5),p. 52</p>
<p>Explain how the basic capacitor is constructed.</p>	<p>4. Capacitors a. capacitor construction b. dielectric values c. effects of physical construction on value</p>		<p>Dissect several types of capacitors. NOTE: Some oil filled and electrolytic capacitors contain potential hazardous liquids.</p>	
<p>Students will be able to explain the ratings of capacitors and their significance in actual circuits.</p>	<p>5. Capacitor ratings a. capacitance value b. how capacitance determined c. working voltage d. tolerance e. polarity f. capacitor color coding</p>	<p>Work related problems to determine capacitance.</p>		<p>(#16),p.424 (#12),p. 229 (#5),p. 55</p>

VI: DIRECT CURRENT CIRCUITS (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Name several types of capacitors and their general uses.</p> <p>Explain the transient response curves of capacitors, calculate time constants, and explain their importance.</p> <p>Determine the total capacitance and working voltage of series and parallel capacitor circuits.</p>	<p>6. Types of capacitors</p> <ul style="list-style-type: none"> a. capacitor types b. variable capacitors c. types of dielectrics <p>7. Transient response</p> <ul style="list-style-type: none"> a. transient response--charging b. transient response--discharging. <p>8. Basic capacitor circuits</p> <ul style="list-style-type: none"> a. total capacitance in series and parallel b. voltage division in series c. voltage ratings in series d. total capacitance in parallel e. voltage ratings in parallel <p>G. Unit Review</p> <p>H. Unit Test</p>	<p>Build capacitor circuits and measure charging times, graph capacitor voltages, and determine time constants.</p> <p>Build R.C. circuit using series and parallel capacitor connections and measure time constants and voltage distribution.</p>	<p>Show students different types of capacitors and discuss their characteristics.</p> <p>Draw transient response on board or overhead projector and discuss charging and discharging.</p> <p>Discuss fully series and parallel connections and the voltage distribution.</p>	<p>(#12), p. 238 (#5), p. 151</p> <p>(#12), p. 238</p>

45

UNIT VII: MAGNETISM

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL(S)	GENERAL UNIT OBJECTIVES
<p>The purpose of this unit is to introduce the student to magnetism. Electric current produces magnetic fields and magnetic fields produce electric current.</p>	<p>To make the student aware of the theories and principles used in dealing with magnetic devices.</p>	<p>Upon completion of this unit the student should be able to:</p> <ol style="list-style-type: none">1. Identify how you get magnets.2. Understand permeability3. Understand the term magnetic domain and why the crystals are positioned in a north-south direction.

94

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>At the conclusion of this unit the student should be able to:</p> <p>Classify magnets according to the method by which they obtain their magnetic field.</p>	<p>A. History of Magnetism</p> <ol style="list-style-type: none"> 1. Magnets 2. Artificial magnets <ol style="list-style-type: none"> a. shape b. material use c. method used to obtain magnet field 	<p>*Note taking Discuss magnetism history. Identify shapes and material used in classifying magnets.</p>	<p>*Lecture and discussion</p>	<p>(#17), Unit 5, pp. 5-7 (#20), p. 56</p>
<p>Demonstrate an understanding of the observed phenomenon of magnetic theory.</p>	<p>B. Magnetic Theory</p> <ol style="list-style-type: none"> 1. Permeability <ol style="list-style-type: none"> a. flux b. poles 2. Domain 3. Law of magnetism 	<p>Explain what is meant by magnetic flux, permeability, and magnetomotive force.</p>	<p>Show shape of field around magnet using iron filings on white paper.</p>	<p>(#17), Unit 5, pp. 5-13</p>
<p>Name the basic building materials for magnets.</p>	<p>C. Magnetic Materials and Effect</p> <ol style="list-style-type: none"> 1. Ferromagnetic 2. Diamagnetic 3. Magnetic shielding 	<p>Discuss magnetomotive force and reluctance for making a temporary magnet. Discuss places where magnetic shielding is necessary.</p>	<p>Demonstrate the strength of magnetic materials.</p>	<p>(#17), Unit 5, p. 10 (#20), p. 52</p>
<p>Define and understand the terms and formulas used in magnetic circuits.</p>	<p>D. Measuring Magnetism</p> <ol style="list-style-type: none"> 1. Magnetomotive force 2. Flux density 3. Intensity 4. Reluctance 5. Permeability 6. Retentivity 	<p>Identify way to measure magnets.</p>	<p>Lecture</p>	<p>(#20), pp. 56, 57</p>
<p>Develop a working knowledge of electromagnetic relation to electricity.</p>	<p>E. Electromagnetic Effect</p> <ol style="list-style-type: none"> 1. Relation to current 2. Magnetism in coil of wire 3. Electromagnetic devices <ol style="list-style-type: none"> a. solenoid b. relay c. circuit breakers d. speakers e. meters f. recording tape 	<p>State the principle of electromagnetic induction. Demonstrate a practical circuit using the relay and reed switch.</p> <p>*In notebook</p>	<p>Use compass to indicate magnetic field around wire. Discuss the operation of several electromagnetic devices, including solenoids and doorbells. Use charts, overhead projector, and transparencies.</p>	<p>(#17), Unit 5, p. 56 (#20), p. 59 (#17), Unit 5, p. 62</p>

UNIT VII: MAGNETISM (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Define induction, inductance, and counter EMF.</p> <p>Describe the factors which determine inductance.</p>	<p>P. Inductance</p> <ol style="list-style-type: none"> 1. Induced EMF 2. Lenz's Law 3. Measuring inductance 4. Effect of cores 5. Quality of coils 6. Transient response 7. Time constants 8. Inductance in series 9. Inductance in parallel <p>F. Test Review</p> <p>H. Test</p>	<p>List the unit of inductance.</p> <p>Describe the factors which determine inductance.</p> <p>Draw the schematic symbols for inductor.</p> <p>Construct RL circuit and determine changing rates and time constants experimentally.</p> <p>Test</p> <p>Review test</p>	<p>Demonstrate inductive kick by using large inductor and neon bulb. Switch low voltage DC on and off to flash neon bulb.</p> <p>Review test</p>	<p>(#17), Unit 8, pp. 6-8</p> <p>(#17), Unit 8, pp. 9-11</p>

UNIT VIII: TEST EQUIPMENT

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL(S)	GENERAL UNIT OBJECTIVES
<p>This unit is intended to familiarize students with the more common test equipment and its proper use.</p> <p>Teachers should be aware of the importance of using the correct nomenclature, as well as the need for thoroughness in initial demonstrations.</p>	<p>Students will be given maximum opportunity to identify, select, and handle a variety of electronic test equipment.</p>	<p>Upon completion of this unit the learner will be able to name the various types of test equipment and describe the use of each by completing the unit test. Learner must score at least 70 percent to pass.</p> <p>Demonstrate an understanding of meter construction and oscilloscope fundamentals.</p>

49

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>The learner will be able to read, calibrate, and measure electrical quantities using the analog or digital volt, amp, and ohmmeters.</p>	<p>A. Test Equipment</p> <ol style="list-style-type: none"> 1. Meter movement analog <ol style="list-style-type: none"> a. d'Aronval movement <ol style="list-style-type: none"> 1. construction 2. operation b. taut-band movement c. Iron vane <ol style="list-style-type: none"> 1. radial vane 2. concentric vane d. thermocouple <ol style="list-style-type: none"> 1. operation 2. construction 3. electrical characteristics 2. Ammeter <ol style="list-style-type: none"> a. computing shunt resistance to increase the range of the ammeter b. scales <ol style="list-style-type: none"> 1. linear 2. nonlinear c. ammeter accuracy d. circuit connections 3. Voltmeter <ol style="list-style-type: none"> a. extending the range <ol style="list-style-type: none"> 1. calculating the multiplier 2. multi-range voltmeters b. loading effect of voltmeters c. typical connections d. typical voltmeters AC & DC <ol style="list-style-type: none"> 1. DC 2. AC 	<p>Read chapter. Answer review questions. Take notes. Do lab on familiarization of analog meters.</p> <p>Read section on ammeter. Answer programmed review questions. Do lab activity to demonstrate a method of finding the resistance of a meter movement or the ammeter section of a multimotor</p> <p>Read chapter on voltmeter. Answer programmed review questions.</p>	<p>Lecture Show students proper techniques and safety in using this type of meter.</p> <p>Demonstrate possible applications of ammeters. Generate possible quiz or definition sheet.</p> <p>Demonstrate proper use in hooking up meter in parallel.</p>	<p>(#19), pp. 1-5 to 1-20</p> <p>(#19), pp. 1-21 to 1-34</p> <p>(#19), pp. 1-35 to 1-49</p>

50

UNIT/VIII: TEST EQUIPMENT (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>The learner will be able to identify the components, features, controls, and measure using the oscilloscope. They will also learn to:</p> <ul style="list-style-type: none"> avoid damage to the scope, properly adjust and calibrate the scope, and connect the scope with minimal disturbance to the quantity being observed. 	<p>4. Ohmmeter</p> <ol style="list-style-type: none"> a. scale calibration b. creating higher and lower ranges c. shunt ohmmeter d. measurements e. scales <p>5. Volt-Ohm-Millimeter.</p> <ol style="list-style-type: none"> a. VOM b. DC voltmeter c. millimeter <p>6. Digital/LED or LCD type</p> <ol style="list-style-type: none"> a. analog to digital conversion b. integrating techniques <ol style="list-style-type: none"> (1) single-slope A/D conversion (2) dual-slope integration (3) voltage to frequency (4) charge balance c. non-integrating techniques <ol style="list-style-type: none"> (1) linear-ramp conversion d. signal processor e. displays 	<p>Read section on ohmmeters. Answer programmed review questions. Do lab activity which requires the reading of different resistances.</p> <p>Read section on VOM. Answer programmed review questions. Do lab activity that involves each section of the volt-ohm-millimeter. Read selected materials on digital meters. Complete programmed review questions. Complete a lab activity which demonstrates learner's comprehension of meter.</p>	<p>Demonstrate proper use in reading ranges and scales of the ohmmeter.</p> <p>Explain the range switching sockets and ohm control.</p> <p>Demonstrate the operation, function, and reading of the meter.</p>	<p>(#21), pp. 1-50 to 1-63</p> <p>(#23), pp. 1-64 to 1-73</p> <p>(#21), pp. 2-6 to 2-28</p>
	<p>B. Oscilloscope</p> <ol style="list-style-type: none"> 1. Cathode ray tube 2. Deflection circuits 3. Oscilloscope circuits 4. Special features 5. Controls 	<p>Read section(s) covering oscilloscopes. Take notes. Answer programmed review questions. Display wave forms using scope.</p>	<p>Demonstrate the proper handling, use, and operation.</p>	<p>(#23), pp. 1-50 to 1-63</p> <p>(#30), pp. 2-15</p>

51

UNIT VIII: TEST EQUIPMENT (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Display a wave form (or a selected portion thereof) and measure its characteristics (amplitude, period, frequency). Determine the relationship between two waveforms such as phase shift.</p> <p>Display any phase (lissajous) fixtures).</p> <p>Interpret the results of oscilloscope measurements taking the limitations of the scope into account.</p>				
<p>The learner will be able to use and identify the waveforms of functional and signal generators.</p>	<p>C. Function/Signal Generator</p> <ol style="list-style-type: none"> 1. Basic concepts. 2. Waveforms <ol style="list-style-type: none"> a. sine wave b. square wave c. triangle wave d. sawtooth wave e. pulse 3. Radio frequency 	<p>Read section covering function/ a signal generator.</p> <p>Take notes.</p> <p>Answer programmed review questions.</p> <p>Complete lab activity to demonstrate how the output frequency and voltage can be checked.</p>	<p>Demonstrate use and operation of a function generator.</p>	<p>(#19), pp. 5-111 to 5-125</p>
<p>The learner will be able to develop a working knowledge of the use and function of a transistor tester.</p>	<p>D. Transistor Tester</p> <ol style="list-style-type: none"> 1. beta 2. leakage 3. set tests 	<p>Be able to use this piece of test equipment (if lab equipped).</p> <p>Read chapter.</p> <p>Take notes</p> <p>Complete programmed review questions.</p>	<p>Demonstrate/explain purpose and use.</p> <p>Demonstrate proper set-up and use of transistor tester.</p>	<p>(#19) pp. 5-69 (#19) pp. 6-12 to 6-19</p>
<p>The learner will be able to identify the type of transistor and transistor leads using a transistor tester.</p>	<p>E. Unit Review</p>	<p>Select a couple of different transistors and test each.</p>		
	<p>F. Unit Exam</p>			

UNIT IX. A.C. CIRCUITS

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL(S)	GENERAL UNIT OBJECTIVES
<p>This unit is designed to present to the student alternating current circuit analysis techniques. Also included is a study of alternating current fundamentals and transformers.</p>	<p>The goal of this unit is to introduce vector analysis techniques for alternating current circuits that contain resistors, capacitors, and inductors.</p>	<p>Upon completion of this unit the student will be able to:</p> <ul style="list-style-type: none"> Identify specific quantity measurements of AC, waveforms and convert from one to another where appropriate. Analyze RL, RC, and RLC circuits for reactance, impedance, phase angle, true power, and power factor. Determine the resonant frequency and frequency response curves of RLC circuits. Build various types of filter circuits to specific requirements. Explain the operation and applications of transformers.

53

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Students will be able to identify basic waveforms by their shape.</p> <p>Student will be able to define alternating current quantities and convert measurements where appropriate.</p> <p>Students will be able to sketch three phase alternating current waveforms and give application and advantages of polyphase circuits.</p> <p>Student will be able to define the terms in-phase and out-of-phase as they relate to alternating currents.</p>	<p>A. Alternating Current Fundamentals</p> <ol style="list-style-type: none"> 1. Waveforms <ol style="list-style-type: none"> a. sine wave b. square wave c. ramp (sawtooth) wave d. triangle wave 2. A.C. Quantities <ol style="list-style-type: none"> a. frequency b. period c. wavelength d. peak value e. peak-to-peak value f. effective (RMS) g. average value h. instantaneous value i. harmonious 3. Polyphase A.C. <ol style="list-style-type: none"> a. two-phase waveform b. three-phase waveform c. uses of polyphase current d. advantages of polyphase current e. polyphase distribution systems 4. Phase relationship <ol style="list-style-type: none"> a. in-phase voltage and currents b. out-of-phase voltage and currents c. power in A.C. circuits that are in-phase d. power in A.C. circuits that are out-of-phase 	<p>Students take notes in notebook.</p> <p>Discuss advantage of polyphase over single phase A.C.</p>	<p>Display example waves on oscilloscope or draw on board.</p> <p>Draw waveform and show what each quantity represents. Have students convert from one quantity to another. Example: Find wavelength of 1 MHz signal. Demonstrate changing of one quantity to another.</p> <p>Draw waveforms on board or use overhead transparencies to indicate phase relationship.</p> <p>Draw out-of-phase signals (voltage and current) and discuss areas of positive and negative power.</p>	<p>(#12), p. 147 (#16), pp. 314, 329</p> <p>(#16), pp. 317-322 (#12), pp. 148-151</p> <p>(#12), p. 157 (#16), p. 345</p> <p>(#12), p. 168 (#16), p. 333 (#10), p. 72</p>

UNIT IX: A.C. CIRCUITS (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Student will be able to define and calculate capacitive reactance for a given circuit.</p> <p>Student will be able to analyze circuits involving resistance and capacitive reactance.</p>	<p>B. Capacitive Circuits</p> <ol style="list-style-type: none"> 1. Capacitors in A.C. <ol style="list-style-type: none"> a. capacitive reactance b. phase shift c. power consumption by capacitor 2. Capacitance quantities <ol style="list-style-type: none"> a. reactance b. impedance c. phase angle d. apparent power e. true power f. power factor g. vector analysis techniques 	<p>Students graph capacitive reactance versus frequency.</p> <p>Build R.C. circuits, applying a variety of frequencies. Measure voltage drops and use oscilloscope display phase relationship between capacitor and resistor.</p> <p>Analyze R.C. circuits.</p>	<p>Discuss reactance and how it is determined.</p> <p>Demonstrate process of A.C. circuit analysis using vectors.</p>	<p>(#16), p. 500 (#12), p. 139 (#10), p. 95</p>
<p>Student will be able to define and calculate inductive reactance for a given circuit.</p> <p>Students will be able to analyze numerically and vectorally circuits involving resistance and inductive reactance.</p>	<p>C. Inductive Circuits</p> <ol style="list-style-type: none"> 1. Inductive reactance 2. Phase shift 3. Power consumption by inductor 4. Inductance quantities <ol style="list-style-type: none"> a. reactance b. impedance c. apparent power d. true power e. power factor f. vector analysis of R.L. circuits 	<p>Students graph inductive reactance versus frequency.</p> <p>Build R.L. circuits applying a variety of frequencies, measure voltage drops and display phase relation between inductor and resistor.</p>	<p>Discuss reactance in R.L. circuits and how it is determined.</p> <p>Demonstrate application of A.C. analysis to R.L. circuits.</p>	<p>(#10), p. 100 (#12), p. 191 (#5), p. 138 (#16), p. 499</p>
<p>Students will be able to explain the basic operating principles of the transformer.</p> <p>Students will be able to explain the basic physical construction of transformers.</p>	<p>D. Transformers</p> <ol style="list-style-type: none"> 1. Mutual inductance 2. Coupling 3. Transformer construction <ol style="list-style-type: none"> a. primary b. secondary c. cores 	<p>Using coils and cores indicate effect of coupling of coils.</p>	<p>Show actual transformers to class.</p>	<p>(#12), p. 360 (#12), p. 205 (#5), p. 106 (#10), p. 92</p>

UNIT IX: A.C. CIRCUITS (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Students will be able to use turns ratio to analyze transformer circuits.</p>	<p>4. Ratio a. turns ratio b. voltage ratio c. current ratio</p>	<p>Solve problem using turns ratio of transformer.</p>	<p>Discuss turns ratio and demonstrate solving problems by turns ratio.</p>	<p>(#12), p. 205 (#16), p. 361 (#5), p. 108</p>
<p>Students will be able to explain how multiple voltage transformers function.</p>	<p>5. Multi-voltage transformers a. tapped secondaries b. tapped primary c. multiple secondaries d. multiple primaries e. variable taps f. auto transformers</p>	<p>Discuss how taps split voltage.</p>	<p>Show tapped transformers</p>	
<p>Students will be able to give several uses of transformers.</p>	<p>6. Transformer uses a. voltage transformation b. isolation c. impedance matching d. signal splitting/inversion e. coupling</p>			<p>(#12), p. 212 (#16), p. 363 (#5), p. 113</p>
<p>Students will be able to name the losses of power in a transformer and methods of minimizing power losses.</p>	<p>7. Power losses/uses a. coil resistance/overwinding b. eddy currents/laminating c. hysteresis/special alloys</p>			<p>(#12), p. 206 (#10), p. 366</p>
<p>Students will be able to define and calculate resonant frequency of an LC circuit.</p>	<p>E. Tuned Circuits 1. Resonance</p>	<p>Students calculate-then experimentally determine resonant frequency of circuit.</p>	<p>Demonstrate determining resonance.</p>	<p>(#12), p. 271 (#5), p. 541</p>
<p>Students will be able to analyze RLC circuits and graph the frequency response curves.</p>	<p>2. Series tuned circuit a. impedance b. frequency response c. apparent power d. power factor e. phase angle f. voltage drops g. line currents h. flywheel effect i. figure of merit--Q j. bandwidth</p>	<p>Student build series RLC circuit and examine voltage drops and currents at frequencies above, near and below resonant frequency.</p>	<p>Discuss performance of circuit above, below, and near resonance.</p>	<p>(#12), p. 267 (#10), p. 109</p>
		<p>Perform A.C. analysis of RLC series circuit.</p>	<p>Demonstrate analysis techniques.</p>	

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Students will be able to draw the four major filters, explain how each works and sketch the basic frequency response of each.</p>	<p>3. Parallel tuned circuits a. impedance b. frequency response c. apparent power d. power factor e. phase angle f. voltage drops g. line currents h. figure of merit—Q i. bandwidth j. flywheel effect</p> <p>4. Filters a. high pass b. low pass c. band pass d. band reject</p> <p>5. Combination filters a. notch filters b. crossovers c. bypass capacitor filter</p> <p>F. Unit Review</p> <p>G. Unit Test</p>	<p>Students build parallel RLC circuit and examine voltage drops and currents at frequencies above, near and below resonant frequency.</p> <p>Perform A.C. analysis of RLC parallel circuit.</p> <p>Students construct passive filters and determine the frequency responses.</p>	<p>Discuss performance of circuit above, below, and near resonance. Demonstrate analysis techniques.</p> <p>Draw graph of the response curves.</p> <p>Discuss uses of filters.</p>	<p>(#12), p. 269 (#10), p. 111</p> <p>(#10), p. 265 (#12), p. 279 (#16), p. 571 (#5), p. 173</p>

57

UNIT X. SEMICONDUCTOR FUNDAMENTALS

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL(S)	GENERAL UNIT OBJECTIVES
<p>This unit is to familiarize the learners with the type of semiconductor materials, applications, and theory of operation.</p>	<p>Students will be given maximum opportunity to identify and select semiconductor materials.</p>	<p>Upon completion of this unit, the learner will be able to name the various types of semiconductor materials and their applications by scoring at least 70 percent to pass.</p>

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>The learner will be able to understand the importance, advantages and disadvantages of semiconductors</p>	<p>A. Semiconductor Materials</p> <ol style="list-style-type: none"> 1. Pure semiconductors <ol style="list-style-type: none"> a. carbon b. germanium c. silicon 2. Low temperature characteristics 3. High temperature characteristics 4. Doping semiconductors 5. N-type materials 6. P-type material 7. Current in semiconductance <p>B. P-N Junction</p> <ol style="list-style-type: none"> 1. Forming junction 2. Depletion region <ol style="list-style-type: none"> 1. Barrier potential 4. Forward biased 5. Reverse biased 6. Avalanche breakdown 7. Charge carrier recombination <p>C. Unit Review</p> <p>D. Unit Exam</p>	<p>Read section covering semiconductor materials through high temperature characteristics.</p> <p>Take notes.</p> <p>Understand what takes place with doping.</p> <p>Be able to distinguish the difference between N-type and P-type.</p> <p>Read material covering this section</p> <p>Take notes.</p>	<p>Lecture</p>	<p>(#21), pp. 1-10 - 1-20</p> <p>(#21), pp. 1-20 to 1-23</p> <p>(#21), pp. 2-5 to 2-13</p>

59

UNIT XI: ELECTRONIC DEVICES

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL(S)	GENERAL UNIT OBJECTIVES
<p>This unit is designed to familiarize the student in semiconductor devices and typical circuit applications.</p> <p>The emphasis should be placed upon typical applications and actual circuit operation rather than the process of circuit design.</p> <p>As this area is ever changing the teacher is encouraged to add material whenever it is appropriate.</p>	<p>The goal of this unit is to present to the student the area of semiconductor devices and their applications.</p>	<p>Upon the completion of this unit the student will be able to:</p> <ul style="list-style-type: none"> Name several types of diodes, explain their operation and state a typical use of each. Construct circuits using diodes such as power supplies and voltage multipliers. Explain the operation of diode circuits. Name two types of bipolar transistors and explain the operating theory of each. Name three types of field effect transistors and explain the operating theory of each. Name four different circuit types and the basic characteristics of each. Explain the operating parameters of transistor circuits. Construct basic small signal amplifier from given circuit diagram. Name several biasing and stabilizing methods for transistor amplifiers. Name three thyristor devices, explain their operation and give applications for each. Construct thyristor circuits to specifications. Demonstrate an understanding of device rating and physical packaging designs. Briefly explain fabrication of integrated circuits.

UNIT XI: ELECTRONIC DEVICES (Continued)

INTRODUCTION
(PURPOSE/RATIONALE/INTENTION)

UNIT GOAL(S)

GENERAL UNIT OBJECTIVES

Construct simple circuits using I.C.'s to specifications.
Name several uses of I.C.'s.
Name several uses of operational amplifiers.
Construct op-amp circuits to specifications.
Name several opto-electrical devices and applications of each.

61

105

108

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Student will be able to explain the operating characteristics of the diode.</p> <p>Name several types of diodes and their normal applications.</p> <p>Explain the different ratings for a diode and identify leads on actual diodes.</p> <p>Students will be able to sketch, construct, and explain the operation of several different diode circuits.</p>	<p>A. Diodes</p> <ol style="list-style-type: none"> 1. Characteristics of diode <ol style="list-style-type: none"> a. reverse bias b. leakage c. breakdown voltage d. forward bias e. turn on voltage f. forward bias current g. dynamic resistance h. characteristic curve i. testing diodes--ohmmeter j. recombination of carriers 2. Types of diodes <ol style="list-style-type: none"> a. rectifier b. switching c. zener d. light emitting diode e. crystal diode f. selenium diode g. schematic symbols 3. Ratings <ol style="list-style-type: none"> a. peak inverse voltage b. forward bias current c. zener voltage d. power dissipation 4. Cathode markings 5. Rectifier circuits <ol style="list-style-type: none"> a. half-wave rectifier b. full-wave rectifier c. bridge rectifier d. diode clipper e. diode clamper 	<p>Construct circuit using diode and measure voltage drops and current in forward bias, reverse bias, and with AC applied.</p> <p>Students use ohmmeter to test diodes.</p> <p>Construct series circuit with resistor and zener diode and examine the operation characteristics.</p> <p>Construct rectifier circuits; display outputs on oscilloscope.</p>	<p>Display characteristic curve on curve tracer if available.</p> <p>Use curve tracer to display characteristic curve of each type.</p> <p>Show actual diodes and markings--use manufacturers data sheets as source of rating information.</p>	<p>(#31), p. 18 (#14), p. 178 (#10), p. 210 (#16), p. 630</p> <p>(#6), pp. 179, 192 (#31), p. 23.</p> <p>(#31), p. 31 (#4), p. 298</p>

UNIT XI: ELECTRONIC DEVICES (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Student will be able to name several methods of filtering and regulating D.C. power supplies.</p> <p>Explain the operation of the voltage doubler as an example of the voltage multiplier.</p> <p>Name and briefly explain the principles of voltage converters.</p> <p>Student will be able to explain the construction and basic operating theory of the bipolar junction transistors.</p>	<p>6. Diode packaging</p> <p>7. Filtering</p> <ol style="list-style-type: none"> capacitor R-C filter L-C filter <p>8. Regulation</p> <ol style="list-style-type: none"> bleeder resistor Zener diode I.C. regulations transistor regulator <p>9. Voltage multiplier</p> <ol style="list-style-type: none"> half-wave doubler full-wave doubler triplers use of multipliers <p>10. Voltage converters</p> <ol style="list-style-type: none"> DC to AC inverters DC to DC converters <p>D. Transistors</p> <ol style="list-style-type: none"> Bipolar transistors <ol style="list-style-type: none"> regions doping levels lead currents biasing junctions back injection current gain Types of bipolar transistors <ol style="list-style-type: none"> NPN PNP Fabrication techniques <ol style="list-style-type: none"> regions grown junction alloy junction epitaxial base 	<p>Connect different filter circuits to rectifier network--observe effect on output waveform.</p> <p>Add Zener regulator to filtered power supply.</p> <p>Add I.C. regulator to filtered power supply.</p> <p>Construct voltage doublers. Measure inputs, outputs and display waveform.</p>	<p>Indicate process of determining percent ripple--discuss method of eliminating ripple.</p> <p>Discuss DC voltage conversion methods and uses.</p> <p>Draw simplified diagram on board to aid in explanation.</p> <p>Use overhead or board to show how produced. Show several types of case styles.</p>	<p>(#5), p. 181 (#31), p. 37 (#4), p. 486 (#10), p. 293 (#31), p. 43 (#4), p. 491 (#5), p. 186 (#10), p. 295</p> <p>(#31), p. 41 (#5), p. 184 (#4), p. 490</p> <p>(#3), p. 254 (#4), p. 501</p> <p>(#31), p. 55 (#5), p. 195 (#10), p. 218</p>

UNIT XI: ELECTRONIC DEVICES (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Name and draw diagram on the three basic transistor circuits.</p> <p>Students will be able to read listing of transistor operating parameters, interpret the information and apply information to actual circuits.</p> <p>Student will be able to define cut-off and saturation as they apply to transistors.</p> <p>Student will be able to test transistor to determine if it is good with transistor tester or ohmmeter.</p> <p>Student will be able to define gain of an amplifier.</p> <p>Students will be able to build from a schematic basic amplifier circuits and test each for gain and phase relationship.</p>	<p>4. Transistor circuits a. common base b. common collector c. common emitter</p> <p>5. Operating parameters a. current gain b. voltage gain c. collector to emitter voltage d. collector current e. base current f. family of curves g. constant power curve h. power dissipation</p> <p>6. Transistor data a. material codes b. function codes c. case styles d. transistor number</p> <p>7. Operating ranges a. cut-off b. linear region c. saturation</p> <p>8. Transistor testing a. ohmmeter b. transistor testers c. curve tracers</p> <p>C. Transistor Amplifier Circuits 1. Gain a. voltage gain b. current gain c. power gain d. decibel</p> <p>2. Amplifier circuits a. common base b. common collector c. common emitter d. common source</p>	<p>Construct and test individual transistor circuits for gain.</p> <p>Read manufacturers data sheets and interpret.</p> <p>Use each method to separate good and bad transistors.</p> <p>Build and test basic amplifier circuits.</p>	<p>Draw circuit configurations on board. Give examples of where each is used.</p> <p>Discuss use of data in designing circuits. Discuss sources of this data.</p> <p>Demonstrate the use of each to entire class.</p>	<p>(#10), p. 220 (#31), p. 60</p> <p>(#31), p. 64 (#8), p. 98</p> <p>(#31), p. 67 (#8), p. 102</p> <p>(#31), p. 77 (#5), p. 210 (#16), p. 639</p>

UNIT XI: ELECTRONIC DEVICES (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Student will be able to define biasing and use load lines on characteristic curves to determine biasing network.</p>	<p>3. Biasing method a. load line b. quiescent point c. feedback method d. voltage divider method e. bias stabilization method</p>	<p>Use characteristic curves and load line to determine operating range.</p>		<p>(#31), p. 85 (#5), p. 212 (#16), p. 651</p>
<p>Name methods of coupling multi-stage amplifiers, the advantages and disadvantages of each.</p>	<p>4. Coupling methods a. capacitor b. transformer c. direct d. Parlington pair transistors</p>	<p>Discuss which would be best method under various conditions such as small signal, audio work, high frequency, signal splitting, etc.</p>	<p>Use class discussion.</p>	<p>(#31), p. 97</p>
<p>Students will be able to name the classes of amplifiers and give the approximate biasing points and uses of each.</p>	<p>5. Feedback 6. Distortion 7. Amplifier classes a. class A b. class B c. class AB d. class C</p>		<p>Discuss uses of each class.</p>	<p>(#31), p. 115</p>
<p>Briefly explain the use of the transistor as a switch or indicator/relay driver.</p>	<p>8. Switching and driver circuits a. single transistor common emitter drivers b. darlington drivers c. switching speeds d. emitter follower drivers and switches</p>	<p>Construct transistor relay or lamp driver circuits.</p>		
<p>Students will be able to explain the construction of the silicon-controlled rectifier and its operation in a circuit.</p>	<p>D. Thyristors 1. Silicon-controlled rectifier a. construction b. terminals c. symbol d. volt-ampere characteristics e. circuit connection f. DC operation g. AC operation h. testing with ohmmeter i. ratings</p>	<p>Construct S.C.R. controlled power supply or SCR light dimmer circuit. Test response of SCR in circuit.</p>	<p>Draw construction on board. Show actual SCR's. Draw volt-ampere characteristics on board or use curve tracer.</p>	<p>(#5), p. 191 (#31), p. 237 (#8), p. 232 (#4), p. 258</p>

UNIT XI: ELECTRONIC DEVICES (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Student will be able to name applications of the silicon-controlled rectifiers.</p> <p>Explain the construction of the TRIAC and its operation in the circuit.</p>	<p>2. SCR applications</p> <ol style="list-style-type: none"> switching wave shaping <p>3. TRIAC</p> <ol style="list-style-type: none"> construction terminals symbols volt-ampere characteristics circuit connection operation in circuit TRIAC applications ratings 	<p>Construct TRIAC controlled light dimmer/motor speed control.</p>	<p>Draw construction of TRIAC on board.</p> <p>Show actual TRIAC's.</p> <p>Draw volt-ampere characteristics on board or use curve tracer.</p>	<p>(#8), p. 239</p> <p>(#31), p. 241</p> <p>(#4), p. 261</p>
<p>Explain the construction of the unijunction transistor and its operation in the circuit.</p>	<p>4. DIAC</p> <ol style="list-style-type: none"> construction terminals symbol volt-ampere characteristics circuit connection operation in circuit applications ratings <p>5. Unijunction transistors</p> <ol style="list-style-type: none"> construction terminals symbols volt-ampere characteristics circuit connection operation in circuit application ratings 	<p>Construct DIAC control circuit.</p> <p>Construct unijunction relaxation oscillator circuit to examine operating characteristics.</p>	<p>Draw DIAC construction on board.</p> <p>Show actual DIAC's to class.</p> <p>Draw DIAC volt-ampere characteristics on board or use curve tracer to display.</p> <p>Draw unijunction construction on board.</p> <p>Draw unijunction operating characteristics on board or use curve tracer to display.</p>	<p>(#8), p. 242</p> <p>(#4), p. 261</p> <p>(#31), p. 244</p> <p>(#8), p. 245</p> <p>(#4), p. 265</p> <p>(#31), p. 72</p>

UNIT XI: ELECTRONIC DEVICES (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Students will be able to briefly describe the fabrication of integrated circuits.</p> <p style="text-align: right;">67</p> <p>Student will be able to use manufacturers data to properly connect I.C.'s in a circuit.</p>	<p>E. Integrated Circuits</p> <ol style="list-style-type: none"> 1. Fabrication of circuits <ol style="list-style-type: none"> a. photo lithography b. preparing silicon disc c. fabricating diodes and transistors d. fabrication of resistor e. fabrication of capacitors f. probe testing g. packaging 2. Integration types <ol style="list-style-type: none"> a. monolith I.C. b. thinfilm c. hybrid I.C. d. thick film e. moderate scale integration f. large scale integration g. MOS and TTL characteristics 3. Package styles <ol style="list-style-type: none"> a. flat pack b. dual in-line-DIP c. TO style d. pin determination 4. I.C. circuit construction <ol style="list-style-type: none"> a. pin numbering b. supply voltage c. ground pins d. unused pins e. I.C. sockets 		<p>Develop handout on fabrication techniques.</p> <p>Discuss integration levels as a function of semiconductor technology--point out historical references.</p> <p>Show students package styles with example I.C.'s.</p> <p>Give handout to students indicating pin numbering system supply voltage and special handling considerations of different I.C.'s.</p>	<p>(#31), p. 215 (#4), p. 271 (#5), p. 337</p>

UNIT XI: ELECTRONIC DEVICES (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Students will be able to name several applications of integrated circuits.</p>	<p>5. Analog I.C.'s a. amplifier b. oscillator c. timers d. voltage regulators e. phase-lock loops 6. Digital I.C.'s a. flip-flops b. logic gates c. microprocessors 7. Systems using I.C. a. automotive electronics b. industrial electronics c. aircraft electronics d. communication electronics e. medical electronics f. personal electronics g. entertainment electronics</p>	<p>Students build I.C. controlled square-wave generator. Students build I.C. L.E.D. flasher.</p>		<p>(#31), p. 135 (#10), p. 275</p>
<p>8 Students will be able to construct amplifier circuit using operational amplifiers.</p>	<p>8. Operational-amplifiers a. differential amplifier b. split power supplies c. operating characteristics d. circuit connections e. operational-amplifier applications f. summing and integrating amplifiers</p>	<p>Build or test differential amplifier circuit. Build amplifier circuits using op-amps. Build active filter circuit using op-amps. Heathkit #8 -(Electronics circuits.)</p>		<p>Heath: Electronics Circuits, Exp. #6 or similar Heath: Electronics Circuits, Exp. #8 or similar.</p>
<p>Students will be able to explain the operation of the thermistor and name some uses.</p>	<p>F. Thermistors 1. Negative temperature coefficient 2. Positive temperature characteristics 3. Construction styles 4. Operation 5. Applications</p>		<p>Use curve tracer to display volt-ampere characteristics of thermistors.</p>	<p>(#10), p. 395 (#4), p. 239 (#5), p. 49 (#12), p. 70</p>

UNIT XI: ELECTRONIC DEVICES (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Student will be able to name several types of optoelectric devices, explain briefly their operation, and give application of each.</p>	<p>G. Optoelectric Devices 1. Definition 2. General uses a. isolation of circuits b. communication c. safety d. counting and reading e. light level controls f. lower distortion 3. Light-activated silicon controlled rectifier 4. opto-isolators 5. infra-red LED 6. photoresistors 7. photo diodes 8. LED 9. laser</p> <p>H. Unit Review</p> <p>I. Unit Test</p>			<p>(#10), p. 426 (#4), p. 263 (#31), p. 245</p>

69

UNIT XII: CIRCUIT FABRICATION

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL(S)	GENERAL UNIT OBJECTIVES
<p>The purpose of this unit is to provide students with a working knowledge of fabrication techniques and in the process of making printed circuit boards and other type circuit construction.</p>	<p>The student should be able to identify and select the processes and materials in making a printed circuit board.</p>	<p>Upon completion of this unit the learner will be able to demonstrate knowledge of the processes, techniques, and safety practices used in making printed circuit boards, by scoring at least 70 percent on unit test to pass.</p>

70

124

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Upon completion of this unit the learner will be able to list the processes, techniques, and safety practices used in the making of a printed circuit board.</p> <p>The learner will be able to understand electronic components and their symbols in electronic schematic diagrams.</p>	<p>A. Schematic Diagrams</p> <ol style="list-style-type: none"> 1. Understanding electrical and electronic symbols 2. Identify symbols 3. Breadboarding 	<p>Set up a simple circuit on a breadboard and be able to complete the following:</p> <p>Trace a signal flow through the circuit.</p> <p>The connection dots in the schematic do not necessarily coincide with tie-points in a pictorial.</p> <p>The schematic is drawn with straight connecting lines either horizontal or vertical. Note: They bear little resemblance in location to the wires in the actual circuit.</p> <p>The schematic usually "proceeds" from left to right following the current flow.</p> <p>The schematic identifies each component by a letter and number, such as R_1, R_2, C_1, and so on, for reference purposes.</p> <p>Values of the components are shown on the schematic, but no other labeling is used.</p>	<p>Pass out sheet(s) with schematic components and supplies.</p>	<p>(#7), p.p. 11-14</p>

UNIT XII: CIRCUIT FABRICATION (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>The learner should be able to identify the materials involved in a PC board.</p> <p>The learner will be able to clean a PC board.</p> <p>The learner will be able to use one of the following circuit pattern transfer methods. (Note: limited only by equipment available in the lab.)</p> <p>Learner should be able to set up and etch circuit board.</p>	<p>D. Printed Circuit Boards</p> <ol style="list-style-type: none"> 1. Materials <ol style="list-style-type: none"> a. copper electroplating b. gold plating c. tin-lead plating d. tin-nickel plating 2. Printing <ol style="list-style-type: none"> a. PC board cleaning: industry related cleaning procedures <ol style="list-style-type: none"> (1) chemical cleaning (2) degreasing (3) acid dipping b. photoresists <ol style="list-style-type: none"> (1) negative acting (2) positive acting c. silk screen printing <ol style="list-style-type: none"> (1) screen preparation (2) screen inks (3) problems d. contact print <ol style="list-style-type: none"> a. rub-off transfer f. etch resistant inks 3. Etching <ol style="list-style-type: none"> a. etching solutions <ol style="list-style-type: none"> (1) cupric chloride (2) ammonium persulfate (3) ferric chloride b. equipment and techniques <ol style="list-style-type: none"> (1) plastic and glass trays (2) plastic utensils for stirring (3) rock the tray to agitate solution 	<p>List and describe each of the different types of circuit boards.</p> <p>Given a PC board the student will be able to go through the proper steps in cleaning it.</p> <p>If facilities exist print these two types of boards.</p>	<p>Display different types of PC Boards.</p> <p>Demonstrate steps involved in cleaning a PC board.</p> <p>Lecture on the ways industry mass produces this process.</p> <p>Demonstrate both types of processes.</p>	<p>(#14), pp. 5-20 to 5-22</p> <p>(#20), pp. 1-38</p> <p>(#14), pp. 4-8 to 4-10</p> <p>(#14), pp. 4-15 to 4-22</p> <p>(#14), pp. 1-25 to 4-33</p>

UNIT XII: CIRCUIT FABRICATION (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
Learner should be able to pass safety test with no less than 100 percent.	c. safety precautions (1) rubber gloves (2) goggles (3) lab coat or apron (4) running water	Be able to list all safety precautions.		
Properly use and set up drilling operations.	4. Drilling a. drill type (carbide or high speed) b. speed c. pressure	Discuss safety using drill and drill sizes.	Give demonstration.	(#20), pp. 5-6
Learner should be able to select and solder proficiently.	C. Soldering 1. Rosin core flux 2. 60/40 ratio (tin to lead mixture) 3. Contact time between board and component 4. Cold solder joints	Discuss and practice making good solder joints.	Give demonstration.	#20, pp. 5-35 to 5-48
Learner should become aware of how and when D and E should be used.	D. Wire Wrapping	Discuss and take notes.	Give demonstration.	
	E. Point-to-Point Wiring	Discuss where and when it might be used.		
	F. Unit Review			
	Unit Exam	Take test over unit.		

UNIT XIII: INTRODUCTION TO COMPUTER LITERACY

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL(S)	GENERAL UNIT OBJECTIVES
<p>The purpose of this unit is to provide the students with a working vocabulary of terms, equipment and processes in the use of a microcomputer.</p>	<p>The goal of this unit is to make the learner knowledgeable and be able to interact with microcomputers.</p>	<p>The learner will be able at the completion of this unit to list components, devices, and terms used in microcomputers. A score of at least 70 percent on the unit test is needed to pass.</p>

74

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>The learner should be able to understand a block diagram showing how information is processed in a computer.</p>	<p>A. History of Computational Machines</p> <p>B. Processing information</p> <ol style="list-style-type: none"> 1. Central processing unit (CPU) 2. Random access memory (RAM) 3. Read only memory (ROM) <p>C. Hardware</p> <ol style="list-style-type: none"> 1. Main frame <ol style="list-style-type: none"> a. Bus concept b. Bus system categories 2. Microcomputer 3. Microprocessor 4. Storage devices <ol style="list-style-type: none"> a. cassette b. soft disc c. hard disc d. tape e. card readers 5. Input/output devices <ol style="list-style-type: none"> a. types of CRT-video monitors <ol style="list-style-type: none"> (1) black and white (2) green phosphorous (3) color b. keyboards c. printers <ol style="list-style-type: none"> (1) dot matrix (2) daisy wheel (3) continuous band/metal band d. joystick paddles e. modems f. voice synthesizer 	<p>Read section in book. Take notes. If computers are present in school, take a look inside one.</p>	<p>Lecture Discuss and show students how information is processed using a block diagram and possibly a microcomputer. Show picture of microprocessor.</p>	<p>(#22), pp. 334 to 338 (#29), pp. 33-40</p>
<p>The learner should be able to understand the different types of memory storage devices.</p>			<p>Show student diskettes, punched cards, etc.</p>	<p>(#22), pp. 10-11 (#29), p. 1</p>
<p>The learner will be able to identify accessories, software types and sources.</p>		<p>Read selected information. Take notes and define each. If school is equipped with such, get some hands-on activity.</p>	<p>Discuss and relate how all devices work and interrelate.</p>	<p>(#15), pp. 23-67</p> <p>(#11), pp. 27-37 (#15), pp. 16-22</p>

UNIT XIII: INTRODUCTION TO COMPUTER LITERACY (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
	<ul style="list-style-type: none"> D. Software <ul style="list-style-type: none"> 1. Programming languages <ul style="list-style-type: none"> a. Basic b. Pascal c. Fortran d. Cobol e. Assembler 2. Programming logic 3. Software sources <ul style="list-style-type: none"> a. commercial b. user groups c. self-generated 			

76

UNIT XIV: ROBOTICS: AN INTRODUCTION FOR YOUR CLASSROOM

INTRODUCTION
(PURPOSE/RATIONALE/INTENTION)

The purpose of this unit is to make the student aware of the changes being brought about by automation in industry.

Since robotics is in its infancy, there is to date no known textbook covering robotics. Therefore, resources for this unit are made from manufacturers and industrial robotics books.

UNIT GOAL(S)

The student should become aware of cybernetics as it relates to industry and be familiar with the concepts involved in robotics.

GENERAL UNIT OBJECTIVES

The learner will be able to identify the components of a robot, define this robot's work envelope, know different types of robots and their applications, and understand the socio-economic impact of robots upon society. A score of at least 70 percent on the unit exam is necessary to pass.

UNIT XIV: ROBOTICS: AN INTRODUCTION FOR YOUR CLASSROOM (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>The learner should be able to list and define the types of robots.</p>	<p>B. Types of Robots</p> <ol style="list-style-type: none"> 1. Non-servo controlled <ol style="list-style-type: none"> a. simplest/least expensive b. responds to a pre-determined sequence c. has the capacity to respond to changes in manufacturing environment 2. Servo-controlled <ol style="list-style-type: none"> a. environmentally adaptive b. sense devices <ol style="list-style-type: none"> (1) position (2) speed (3) load (4) force 3. Remote controlled <ol style="list-style-type: none"> a. types <ol style="list-style-type: none"> (1) master-slave unit (2) telemetry control (3) wire control b. application <ol style="list-style-type: none"> (1) environment where human cannot function (2) where robot travels great distances 	<p>Take notes. Define use of each. Discuss limitations and applications of each.</p>	<p>Discuss the different types of robots and where they may be used.</p>	<p>(#9), p. 33</p>
<p>The learner should be able to list and compare robotic applications in industry relating it to lab activities within the classroom.</p>	<p>C. Robotic Application</p> <ol style="list-style-type: none"> 1. Industrial <ol style="list-style-type: none"> a. spot welding b. arc welding c. material handling d. assembly e. spray painting 	<p>Read, list and discuss robotics in industrial situations.</p>	<p>Introduce industrial applications.</p>	<p>(#34), pp. 3-5</p>

UNIT XIV: ROBOTICS: AN INTRODUCTION FOR YOUR CLASSROOM (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>8</p> <p>The learner should be able to list and discuss the implications of robotics to the work place.</p>	<p>2. Industrial Arts classroom</p> <ul style="list-style-type: none"> a. spot welding b. arc welding c. electronic component assembly d. machine loading and unloading e. line production <ul style="list-style-type: none"> (1) material handling (2) assembly control (3) finishing process (4) quality control (5) research and development (6) metal casting <ul style="list-style-type: none"> a. pouring b. shake-out c. mold venting (7) other imaginative applications. <p>D. Social Economic Impact</p> <ul style="list-style-type: none"> 1. What cybernetics means to industry 2. Productivity levels 	<p>Student can become most creative and imaginative if lab is equipped with a robot. Learner can simulate industrial robotic processes.</p> <p>Discuss future implications.</p>	<p>If possible tie-in the industrial process with automated application to the classroom.</p> <p>Encourage students to take a serious look into the past, present and future.</p>	<p>(#9), p. 111</p> <p>(#2), p. 11</p>

UNIT XV: INDUSTRIAL ELECTRICITY/ELECTRONICS

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL (S)	GENERAL UNIT OBJECTIVES
<p>This unit is designed to present to the student information on the industrial applications of electricity and electronics. The unit includes a study of motors and generators, heating devices and methods, lighting and producing chemical reactions. That portion of the unit on producing chemical reaction may be particularly important to students in the petro-chemical corridor of Louisiana.</p>	<p>The goal of this unit is to familiarize the students with industrial applications of electricity and electronics.</p>	<p>As indicated by a minimum score of 70 percent, upon completion of this unit the student will be able to:</p> <ul style="list-style-type: none">Name four types of generators and explain how they operate.Name several types of motors, their uses and starting methods.Read a motor nameplate and gather specific information and apply that information to a specific need.Name several methods of producing heat from electricity and briefly explain each.Explain how different lighting systems operate.Explain the importance of electrochemical reactions in industry and name several important electro-chemical processes used.

145

146

BEST COPY AVAILABLE

UNIT XV: INDUSTRIAL ELECTRICITY/ELECTRONICS 10 hours

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Student will be able to explain the operating theory of AC generators.</p> <p>Explain the operating theory of DC generators.</p>	<p>A. Generators</p> <ol style="list-style-type: none"> 1. Generator action 2. Inducing voltage and currents 3. Generating the AC cycle-- single loop 4. Output voltages 5. Moving field alternators 6. DC generator <ol style="list-style-type: none"> a. brushes, poles, field coils b. commutator action c. pulsing DC d. lowering ripple e. generator construction f. split rings and commutator 	<p>Assemble and test generator demonstrator.</p>	<p>Demonstrate generator effect using magnet or wire coil or telephone generator.</p> <p>Dissect automobile generator and show parts.</p>	<p>(#12), p. 153 (#16), p. 311 (#5), p. 90 (#23), p. 179 (#10), p. 133</p>
<p>Name the four different types of generators and normal application of each.</p>	<ol style="list-style-type: none"> 7. Types of generators <ol style="list-style-type: none"> a. series generator b. shunt generator c. compound generator d. independently excited e. generator applications 	<p>Assemble and test simple motor demonstrator.</p>	<p>Discuss types.</p>	<p>(#10), p. 136</p>
<p>Students will be able to explain the operating theory of DC motors.</p>	<p>B. Motors</p> <ol style="list-style-type: none"> 1. DC motors <ol style="list-style-type: none"> a. motor action b. commutation c. counter EMF d. current draws e. speed f. motor starting 	<p>Assemble and test simple motor demonstrator.</p>	<p></p>	<p>(#10), p. 141 (#6), p. 287 (#23), p. 173</p>

UNIT XV: INDUSTRIAL ELECTRICITY/ELECTRONICS (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Students will be able to explain the operating principles of AC motors.</p> <p>Name several types of motor and an example of their normal applications.</p> <p>Student will be able to identify major parts of the motor.</p> <p>Student will be able to read motor plate or information sheets and interpret information.</p>	<ol style="list-style-type: none"> 2. A.C. motors <ol style="list-style-type: none"> a. rotating the magnetic field b. inducing rotor voltages c. starting the rotation d. motor force e. centrifugal switches 3. Types of motors <ol style="list-style-type: none"> a. series DC motor b. compound DC motor c. brushless DC d. split phase AC e. polyphase AC f. synchronous motors g. shaded pole motors h. repulsion inductions i. dual voltage j. linear induction motor 4. Motor construction <ol style="list-style-type: none"> a. poles (stator) b. housing c. bells d. armature (rotor) e. commutators f. centrifugal switch g. bearings h. fan 5. Motor ratings <ol style="list-style-type: none"> a. voltage b. current c. horse power d. phase e. cycle f. speed g. temperature rise 	<p>Operate motor demonstrator on A.C.</p> <p>Discuss uses of motors and try to determine type from use.</p> <p>Read motor plates and report information.</p>	<p>Give normal or common application for each type named.</p> <p>Disassemble motor and show parts and how they interact.</p> <p>Discuss motor plates and information found on them.</p>	<p>(#10), p. 150 (#6), p. 290 (#23), p. 176</p> <p>(#10), p. 150 (#6), p. 292 (#23), p. 176</p>

UNIT XV: INDUSTRIAL ELECTRICITY/ELECTRONICS (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Student will be able to name several types of motor starting systems and examples of their applications. Briefly explain procedures for care and maintenance of electric motors.</p>	<p>6. Motor starting systems a. potentiometers b. stopped resistors c. magnetic starters 7. Care and maintenance of motors a. lubrication b. cleaning</p>	<p>Wire magnetic starter to motor or lamp to indicate hook-up.</p> <p>Student committee to service motor in lab.</p>	<p>Discuss greasing, cleaning, oiling parts, and thermal overload protection.</p>	
<p>Student will be able to explain resistance heating and name several applications.</p>	<p>C. Resistance Heating 1. Resistance heaters a. radiant b. infrared 2. Welding a. arc welding b. spot welding 3. carbon arc a. furnaces b. lamps c. welding</p>	<p>Wind heating coil of nichrome wire and test.</p>	<p>Use high voltage transformer to indicate heat and light aspects of electric arcs.</p>	<p>(#6), p. 302</p>
<p>Student will be able to name several uses of electricity to produce chemical reactions.</p>	<p>D. Electrochemical Production by Electrolysis 1. Oxygen 2. Hydrogen 3. Chlorine</p>	<p>Produce oxygen and hydrogen by electrolysis of water. Caution: Hydrogen is flammable Students metal plate small objects.</p>	<p>Discuss importance of these processes to industry and society.</p>	<p>(#6), p. 269</p>
<p>Students will be able to explain the different aspects of high frequency heating and give examples of their uses.</p>	<p>B. High Frequency Heating 1. Induction heating 2. Microwave heating 3. Dielectric heating</p>		<p>Use microwave oven as example of high frequency heating.</p>	<p>(#6), p. 306</p>

XV. INDUSTRIAL ELECTRICITY/ELECTRONICS (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Students will be able to explain the methods used to produce light.</p>	<p>F. Electric lighting 1. Incandescent lamps 2. Ionized noble gasses a. neon b. argon c. xenon 3. Ionized metal vapor a. fluorescent b. black light 4. Metal vapor-arc lamps G. Unit Review H. Unit Test</p>	<p>Student use neon bulb to construct relaxation oscillator.</p>	<p>Demonstrate turn-on voltage and current response of glow lamps using neon bulb.</p>	<p>(*6), p. 259 (*12), p. 62</p>

BEST COPY AVAILABLE

UNIT XVI: CAREERS

INTRODUCTION (PURPOSE/RATIONALE/INTENTION)	UNIT GOAL(S)	GENERAL UNIT OBJECTIVES
<p>As industrial arts is to aid in vocational selection by the student it is important that the student be provided career information. This unit is designed to provide such information. The teachers should feel free to incorporate this unit at any point in the course that is practical.</p>	<p>The goal of this unit is to familiarize the student with possible career opportunities in the field of Electricity/Electronics.</p>	<p>Upon the completion of this unit the student will be able to use several sources of career information.</p>



OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
<p>Student will be able to name several occupations related to the Electricity/Electronics and state sources of further information on these occupations.</p>	<ul style="list-style-type: none"> A. Engineering <ul style="list-style-type: none"> 1. Nature of work 2. Where employed 3. Employment outlook B. Technician <ul style="list-style-type: none"> 1. Job types <ul style="list-style-type: none"> a. television b. radio c. communications d. computer 2. Training requirements 3. Training sources C. Utilities <ul style="list-style-type: none"> 1. Power plant workers 2. Transmission and distribution 3. Consumer services D. Telephone Companies <ul style="list-style-type: none"> 1. Installers and repair 2. Operators 3. Central office installers 4. Line construction and maintenance E. Manufacturing <ul style="list-style-type: none"> 1. Managerial 2. Technician <ul style="list-style-type: none"> a. lab technicians b. draftsmen c. electronics technician 3. Assembly 4. Machining 5. Fabricating 6. Processing 7. Testing 	<p>Investigate possible careers of interest.</p>	<p>Bring in resource people from community to speak to class.</p>	

87

UNIT XVI: CAREERS (Continued)

OBJECTIVES	TOPICS	STUDENT ACTIVITIES	TEACHER ACTIVITIES	RESOURCES
	<ul style="list-style-type: none"> F. Construction Electrician <ul style="list-style-type: none"> 1. Industrial 2. Commercial 3. Residential G. Maintenance Electricians H. Broadcasting I. Teacher <ul style="list-style-type: none"> 1. Secondary 2. Technical school 3. University J. Sources of Information <ul style="list-style-type: none"> 1. Government agencies 2. Companies 3. Unions 		<p>Demonstrate use of occupational outlook handbook and other sources.</p>	

APPENDIX 1
SAMPLE TESTS

Unit I--Electricity/Electronic Safety
Sample Test (Review)

Name: _____ Class: _____ Date: _____

I. Multiple Choice: For each item below, select the one best answer. Then write the letter that represents your choice on the line to the left of each item.

1. You should wear suitable eye protection.
A. to improve your vision
B. to avoid myopia
C. when engaged in any activity where hazards may exist
D. to improve your appearance
2. Jewelry
A. should never be worn in the electrical/electronics shop
B. should all be removed when working in the shop except rings
C. should be worn to improve your appearance
D. can be worn if the student wishes
3. What factors determine how much current will flow through the human body?
A. The amount of volts in the line
B. The length of time you are connected
C. The resistance of the body and whether the skin is moist or dry
D. The strength of the person and his/her age
4. Some typical electrical shock hazards are
A. wearing rubber sole shoes
B. using the wrong extension cord
C. working in low voltage area
D. working around worn insulation
5. A safe distance for operating around live circuits 3,501 to 11,000 volts is
A. three feet
B. two feet
C. one foot
D. one-half foot
6. To control fires associated with electrical equipment and facilities, the extinguishing agent must be a nonconductor of electricity and provide a smothering effect. How is this type of fire classified?
A. C
B. D
C. A
D. B
7. In marking physical hazards, "caution" identification of high voltages at machinery is done by which of the OSHA color codes.
A. Purple
B. Red
C. Green
D. Yellow

Unit I Sample Test (Continued)

8. What work is done with side-cutting pliers?

- A. Use for cutting very soft wire
- B. Use for cutting heavier wire
- C. Use for forming loops at the end of wires
- D. Bending wire lugs

9. The path to ground is permanent and continuous so that the path has ample current-carrying capacity. This is

- A. a live circuit
- B. a poor ground
- C. a good ground
- D. none of these

10. The ohmmeter should

- A. never be connected to a source with power
- B. always connected in parallel
- C. always connected in series
- D. any of the above

Unit I--Electricity/Electronic Safety
Test Key

- C 1.
- A 2.
- C 3.
- D 4.
- B 5.
- A 6.
- D 7.
- B 8.
- C 9.
- A 10.

Unit II--Math Review
Sample Test

1. $\frac{1}{10} + \frac{1}{8} + \frac{1}{40} =$ _____

2. $\frac{2}{3} + \frac{6}{7} - \frac{4}{21} =$ _____

3. $\frac{4}{9} + \frac{2}{3} =$ _____

4. $\frac{3}{2} - \frac{1}{4} + \frac{2}{6} =$ _____

5. $2 - \frac{5}{8} = \frac{5}{4} =$ _____

6. $\frac{6}{13} \div \frac{8}{39} =$ _____

7.
$$\begin{array}{r} 836 \\ \times 79 \\ \hline \end{array}$$

8.
$$\begin{array}{r} 6.95 \\ \times 86 \\ \hline \end{array}$$

9.
$$\begin{array}{r} 5.26 \\ \times 3.5 \\ \hline \end{array}$$

10. $2.5 \sqrt{53,25}$

11. $16 \sqrt{228}$

Express in scientific notation:

12. 186,000 = _____

13. 3,462,000,000 = _____

14. .0000056 = _____

15. .00102 = _____

Express as decimal numbers:

16. $3.26 \times 10^8 =$ _____

17. $4.71 \times 10^{-8} =$ _____

18. $1.346 \times 10^6 =$ _____

Make the following conversions as-indicated.

19. 34600 = _____ K Ω

20. 3.64 μ A = _____ A

21. 11.6 K = _____ Ω

22. 1.43 M = _____ K Ω

23. 150,000,000 = _____ KV

Unit II--Sample Test (Continued)

Solve the following equations for E.

24. $3E = 16$ E = _____

25. $\frac{E}{5} = 56$ E = _____

26. $2E = 36 + E$ E = _____

27. $V = \frac{ER}{R+S}$ E = _____

28. $1.26 \times 10^3 + 1.4 \times 10^4 =$ _____

29. $\sqrt{625} =$ _____

30. $\sqrt{144 \times 10^{-3}} =$ _____

Unit II--Math Review
Test Key

1. $1/4$

2. $4/3$

3. $10/9$

4. $1/8$

5. $5/3$

6. $9/4$

7. 66044

8. 597.70

9. 18.41

10. 21.3

11. 14.25

12. 1.86×10^5

13. 3.462×10^9

14. 5.6×10^{-6}

15. 1.02×10^{-3}

16. 326,000,000

17. .0000000471

18. 1,346,000

19. 24.6 K

20. .00000364A

21. 11,600 Ω

22. 1,430K Ω

23. 150,000K V

24. $I = 5.333$

25. $I = 280$

26. $E = 36$

27. $E = \frac{V R + V S}{R}$

28. $15.26 \times 10^3 = 1.526 \times 10^4$

29. 25

30. 3.88×10^{-2}

Unit III--Nature of Electricity
Sample Test (Review)

Name: _____

Class: _____

Date: _____

I. Multiple Choice: For each item below select the one best answer. Then write the letter that represents your choice on the line to the left of each item. Fill in the blank for 16 through 20.

- ____ 1. The basic material that makes up all matter is the

 - A. atom
 - B. element
 - C. electron
 - D. proton
- ____ 2. The smallest unit of matter that still retains the structure of the element is

 - A. proton
 - B. element
 - C. neutron
 - D. atom
- ____ 3. An atom that has lost an electron is called

 - A. positive ion
 - B. negative ion
 - C. neutral atom
 - D. none of these
- ____ 4. Particles with like charges will repel each other, particles with unlike charges will attract each other. What law or principle is this?

 - A. Ohm's Law
 - B. Electrostatic field
 - C. Law of electrical charges
 - D. EMF
- ____ 5. The outer part of the nucleus with a negative charge is

 - A. electron
 - B. neutron
 - C. proton
 - D. atom
- ____ 6. Material that has a large number of free electrons is called

 - A. insulators
 - B. terminals
 - C. conductors
 - D. atoms

Unit III--Sample Test (Continued)

7. Which is the best conductor for electricity?
- A. Copper
 - B. Aluminum
 - C. Glass
 - D. Silver
8. A material with few free electrons is called a/an
- A. insulator
 - B. terminal
 - C. conductor
 - D. proton
9. Which is not an insulating material?
- A. Dry wood
 - B. Rubber
 - C. Wire
 - D. Glass
10. Capacitors make it possible to store electric energy. Electrons held in store are also known as
- A. insulating
 - B. electrical potential
 - C. semi-conducting
11. Holding back or impeding the movement of electrons along a conductor is known as
- A. temperature
 - B. material
 - C. resistance
 - D. semi-conductor
12. The relationship of voltage, current, and resistance to each other is covered by a set of basic electrical principles known as
- A. Ohm's Law
 - B. Kirchoff's Law
 - C. EMF
 - D. Law of charges
13. The equation for voltage (emf) is:
- A. $I = \frac{E}{R}$
 - B. $R = \frac{E}{I}$
 - C. $E = I \times R$

Unit III--Sample Test (Continued)

14. The equation for current is:

A. $E = I \times R$

B. $R = \frac{E}{I}$

C. $I = \frac{E}{R}$

15. The equation for resistance is:

A. $E = I \times R$

B. $R = \frac{E}{I}$

C. $I = \frac{E}{R}$

16. The rate of doing work is called _____

17. The rate in which weight is moved is _____

18. Electric power is measured in _____

19. The basic formula for determining power in watts is _____


20. There are how many watts in a kilowatt? _____

Unit III--Nature of Electricity
Test Key

1. B - Element
2. D - Atom
3. A - Positive Ion
4. C - Law of electrical charges
5. A - Electron
6. C - Conductors
7. D - Silver
8. A - Insulator
9. C - Wire
10. B - Electrical Potential
11. C - Resistance
12. A - Ohm's Law
13. C - $E = I \times R$
14. C - $I = \frac{E}{R}$
15. B - $R = \frac{E}{I}$
16. Power
17. Horsepower
18. Watts
19. $P = E \times I$
20. 1000 W

171


Unit IV—Meters and Measuring
Sample Test

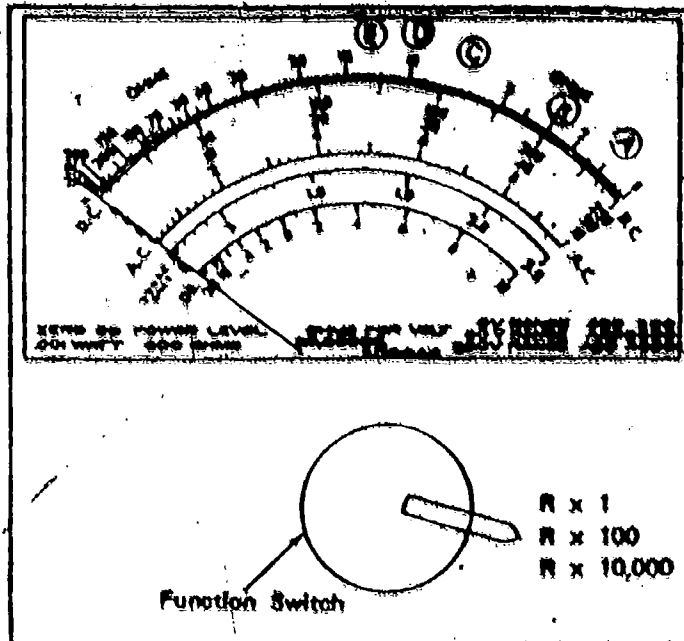

Read and record the resistance on the ohmmeter scale above.

1. Function switch in the R X 1 position. Needle is pointing to "B" on the scale.
2. Function switch in the R X 10,000 position. Needle is pointing to "C" on the scale.
3. Function switch in the R X 100 position. Needle is pointing to "B" on the scale.
4. Function switch in the R X 10,000 position. Needle is pointing to "E" on the scale.
5. Function switch is in the R X 100 position. Needle is pointing to "E" on the scale.

Unit IV--Meters and Measuring (Continued)

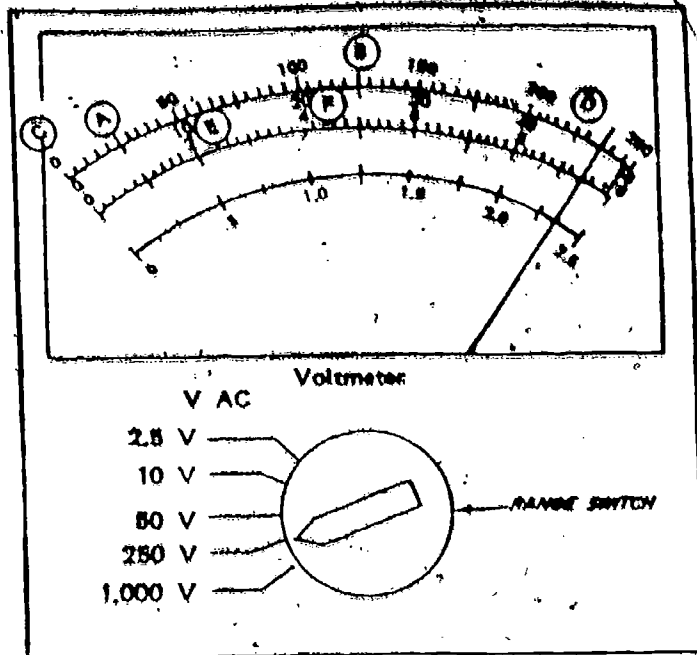

Read and record the voltage of voltmeter.

- _____ 6. Range switch in the 1000V position. Needle is pointing to "F" on the scale.
- _____ 7. Range switch in the 50V position. Needle is pointing to "F" on scale.
- _____ 8. Range switch in the 250V position. Needle is pointing to "D" on the scale.
- _____ 9. Range switch in the 2.5V position. Needle is pointing to "D" on the scale.
- _____ 10. Range switch in the 2.5V position. Needle is pointing to "F" on the scale.

173

Unit IV--Meters and Measuring
Test Key

1. 3 ohms
2. 70,000 ohms
3. 300 ohms
4. 130,000 ohms
5. 1,300 ohms
6. $4.5V \times 100 = 450V$
7. 22.5V
8. 225V
9. 2.25V
10. 1.125V

Unit V--Residential Electricity
Sample Test.

Multiple Choice: Select the one best answer and write the letter that represents it on the line to the left of each item.

1. What is the AC voltage produced at a generating station?
A. 186,000V
B. 4,000V
C. 132,000V
D. 13,200V
2. What is the voltage at which electricity is delivered to the home?
A. 186,000V
B. 2,300V
C. 240V
D. 13,200V
3. Once electricity passes the meter, it is hooked up to a
A. branch circuit
B. distribution panel
C. service drop
D. service head.
4. Most laws or regulations covering the wiring of houses are based on
A. Underwriters Laboratories, Inc.
B. Canadian Standards
C. New York Board
D. National Electrical Code

Matching: Match the tools to their common uses by selecting the letter of the tool to match your choice on the line to the left of each item.

- | | |
|------------------------------|------------------|
| A. Lineman's pliers | F. Ammeter |
| B. Long nose pliers | G. EMT bender |
| C. Adjustable wire strippers | H. Volt ohmmeter |
| D. Multi-purpose tool | I. Drill motor |
| E. Soldering gun (pencil) | J. Fish tape |

5. (a) Forming small conductors (b) holding and pulling on conductors
(c) cutting conductors
6. (a) Stripping insulation from conductors (b) cutting conductors (c) forming conductors
7. Boring holes for cables or conduits when electricity is available
8. (a) Checking circuit amperage (b) checking individual load amperage
(c) checking motor starting and running current

Unit V--Sample Test (Continued)

9. (a) Stripping insulation (b) use to crimp terminals (c) cutting small bolts
10. Bending EMT
11. (a) Pulling wires or cables through EMT or pipe (b) pull cables up insulated walls
12. (a) Cutting cables and conductors (b) cutting screws (c) forming large conductors (d) pulling and holding conductors
13. (a) Splicing conductors (b) splicing soldered conductors
14. (a) Measuring circuit voltages (b) measuring circuit resistance (c) checking for circuit voltage

True-False: If you believe the statement is true, circle "T". If you believe it is false, circle "F".

- T F 15. Single pole switches are used to turn lights on and off in one place.
- T F 16. Three-way switches are used to turn lights on and off in two places.
- T F 17. Romex cables are available with two or three wires and a bare ground wire.
- T F 18. Flexible conduit and rigid conduit is bent with a tool called a conduit bender.
- T F 19. Only two large appliances should be on one circuit. Example: range, dryer and dishwasher.
- T F 20. Most electrical boxes are nailed to the stud to hold them in place.

176

Unit V--Residential Electricity
Test Key

1. D - 13,200V
2. C - 240V
3. B - Distribution panel
4. D - National Electrical Code
5. B - Long nose pliers
6. C - Adjustable
7. I - Drill motor
8. F - Ammeter
9. D - Multi-purpose tool
10. G - HMT bender
11. J - Fish tape
12. A - Lineman's pliers
13. E - Soldering gun (pencil)
14. H - Volt ohmmeter
15. True
16. True
17. True
18. False
19. False
20. True

Unit VI--Direct Current Circuits
Sample Test

1. State Kirchoff's Current Law _____

2. State Kirchoff's Voltage Law _____


3. Define dielectric material _____

4. Name 4 types of capacitors _____

5. .005uf = _____ pf
6. Define working voltage _____


7. Calculate the time constant of an R.C. circuit with a 1.2 uf capacitor and 100KΩ resistor. _____


8. Define series circuit _____

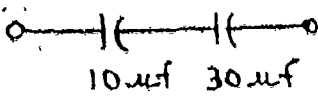9. Calculate the total capacitance:  _____


10. Give the formula for equivalent resistance in parallel. _____

Solve for each of the indicated quantities.

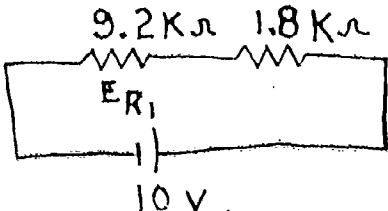11.  $E_{R_1} =$ _____
 $R_{Eq} =$ _____

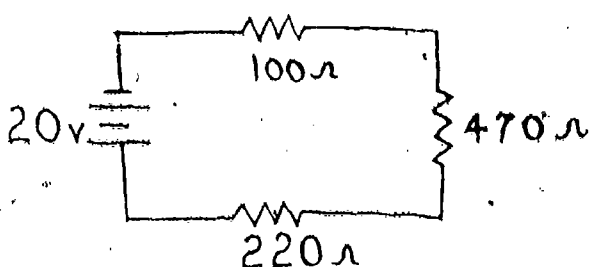12.  $R_{Eq} =$ _____
 $I =$ _____
 $P_{470\Omega} =$ _____


13.

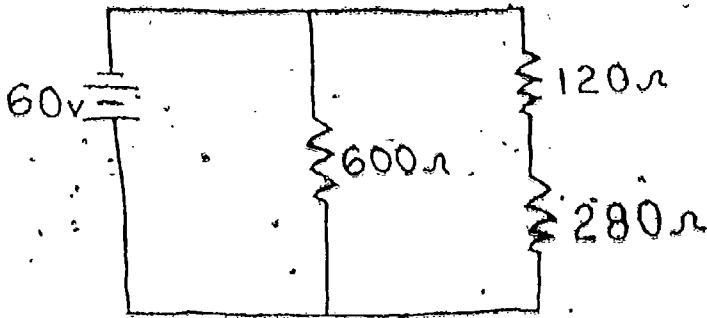

$R_{Eq} = \underline{\hspace{2cm}}$


$P_T = \underline{\hspace{2cm}}$

14.

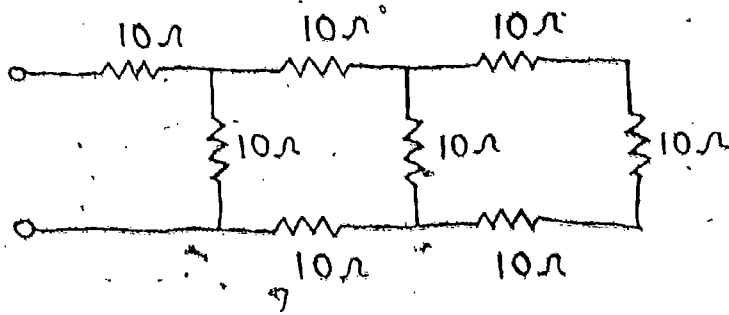


$R_{Eq} = \underline{\hspace{2cm}}$

15.

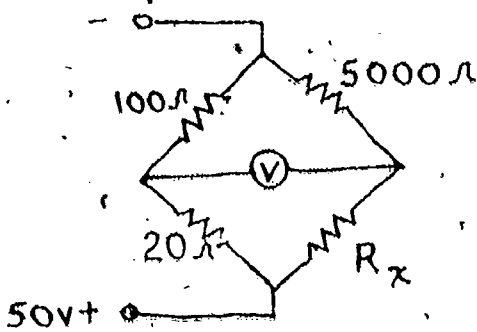


To what is R_x equal if the voltmeter reads 0V?

16.

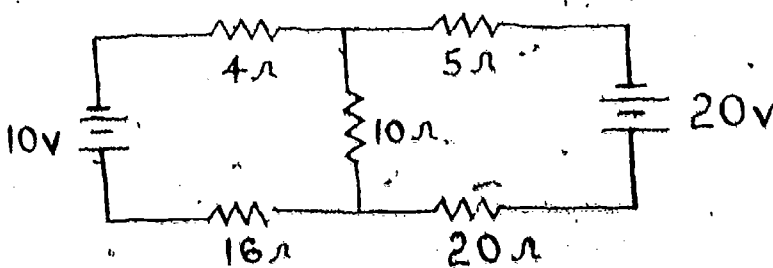

Determine the current through the 10 ohm resistor.

17.

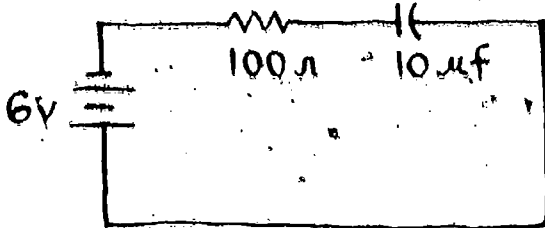

What is the current in the circuit after 10 seconds?

Unit VI--Direct Current Circuits
Test Key

1. The Algebraic sum of the currents entering a node is zero.
2. The Algebraic sum of the voltages around a loop equals zero.
3. Insulating material
4. Electrolytic, disc, polyester film, wax paper, mica, etc.
5. 5000 pf
6. The maximum safe voltage a capacitor may be charged to.
7. .12 seconds
8. Circuit with only one path
9. 7.5 uf
10. $\frac{1}{R_{eq}} = \frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3}$
11. 8.364V, 11K Ω
12. 790 Ω , 25.3 mA, .031 W
13. 240 Ω , 10W
14. 17.33 Ω
15. 1000 Ω
16. .368A
17. 0 A

Unit VII--Magnetism
Sample Test

Fill in the blanks:

1. Lodestone is an example of a natural _____.
2. Man-made magnets are referred to as _____ magnets.
3. The property that determines a material's magnetic characteristic is called permanence or _____.
4. Permeability is defined as the ease with which a substance will accept _____ lines.
5. Small groups of these atoms tend to form tiny permanent magnets called _____.
6. When current flows through a wire; a magnetic _____ is developed around the wire.
7. Horseshoe shapes have an advantage over the bar shapes because the _____ are close together.

Answer the following questions:

8. What determines the polarity of an electromagnet?
9. What two factors determines the strength of a coiled conductor?
10. What kind of magnet results when low-carbon steel is used?

Unit VII--Magnetism
Test Key

1. Magnet
2. Artificial
3. Permeability
4. Flux
5. Magnetic domains
6. Filed
7. Poles
8. The direction of current flow
9. The amount of current flowing in the coil and the number of turns of wire
10. Temporary magnet

Unit VIII--Electronic Test Equipment
Sample Test

1. The permanent magnet moving coil meter is the type used in most general-purpose meters. This type of movement is often called _____ movement.
 - A. taut-band
 - B. iron vane
 - C. d'Arsonval
 - D. Electrodynamic
2. All voltage measurements are made with the meter in _____ with the circuit.
3. The purpose of the zero adjustment on the ohmmeter is to compensate for changes in _____.
4. Before a circuit may be tested with an ohmmeter, the _____ must be _____.
5. When the voltmeter, ammeter, and ohmmeter are combined into a single unit, the unit is called a _____ of a _____.
6. A motor which converts heat to electricity to drive a d'Arsonval movement is called a _____.
7. When converting analog to digital, the single-stop method has better resolution and accuracy than the dual-slope method. True or False
8. To measure larger current values with a digital meter, the resistance in the meter is increased/decreased.
9. What is the most popular type of display used in a digital meter?
 - A. d'Arsonval
 - B. Liquid crystal display
 - C. Electrostatic
 - D. Light emitting diode
10. A display which is brighter than the LED but not as bright as the incandescent is the _____.
11. The liquid crystal display uses more/less power than any other display.
12. A 3-digit meter has a maximum range of _____.
 - A. 99V
 - B. 999V
 - C. 9999V
 - D. 99999V

Unit VIII--Sample Test (Continued)




13. The heart of any oscilloscope is the _____
14. What are the two methods for electron beam deflection in the CRT?
_____ and _____
15. Why should the beam keep moving across the CRT screen?
16. The triggering in the oscilloscope helps to _____
the display on the screen.
17. Oscilloscope voltage measurements are:
- A. peak-to-peak
 - B. RMS
 - C. average
 - D. AC only.
18. Which of the following statements is true concerning transistor testers?
- A. Leakage can be measured in the circuit, while beta must be measured out of the circuit.
 - B. Beta can be measured in the circuit, while leakage must be measured out of the circuit.
 - C. Leakage and beta can be measured in the circuit.
 - D. Neither leakage nor beta can be measured in the circuit.
19. A power supply in an oscilloscope must
- A. only produce a number of voltages
 - B. be able to produce a variety of voltages
 - C. be well regulated
 - D. all of the above.
20. A delayed sweep:
- A. is used in place of a magnifier
 - B. is the normal sweep
 - C. has a separate time base
 - D. all of the above.

Unit VIII--Electronic Test Equipment
Test Key

1. C
2. parallel
3. battery voltage
4. power; removed
5. VOM; multimeter
6. thermocouple
7. false
8. decreased
9. LCD
10. gas discharge
11. less
12. B
13. cathode ray tube
14. electromagnetic, electrostatic
15. because the phosphor will burn
16. stabilize
17. A
18. B
19. D
20. D

Unit IX--AC Circuits
Sample Test

Identify each of the following waveforms

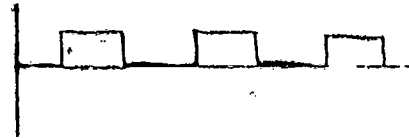

1. _____ 2. _____ 3. _____

4. If a sine wave has a peak voltage of 12V, what is its RMS value?

5. What is the period of a 150 KHZ signal?

6. Why do large motors and heating units use three-phase alternating current?

7. Opposition to alternating current produced by ideal capacitors or inductors is called _____

8. Impedance is the combined opposition of _____ and _____ of a circuit.

9. Impedance is measured in _____

10. Three losses of power in a transformer are _____, and _____

11. A connection to the secondary of a transformer is called a _____

12. Define electrical isolation. _____

13. Power factor is the ratio of _____ to _____ in an ac circuit.

14. Calculate the resonant frequency of a circuit that contains 1.6 mH of inductance and 6.25 pf of capacitance? _____

Solve for the indicated quantities:




Primary = 100 turns
Secondary = 1250 turns

$I_{Secondary} =$ _____
Power into Primary = _____




Unit IX--Sample Test (Continued)

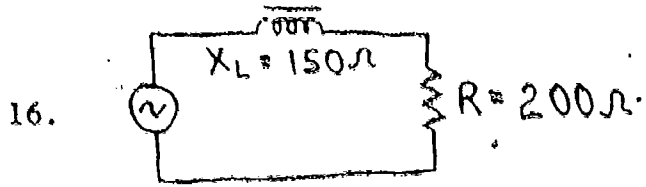


Find: $Z =$ _____


Phase angle = _____

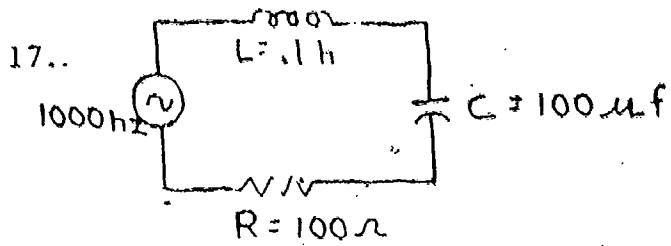


$Z =$ _____

Identify the circuit diagrams below.

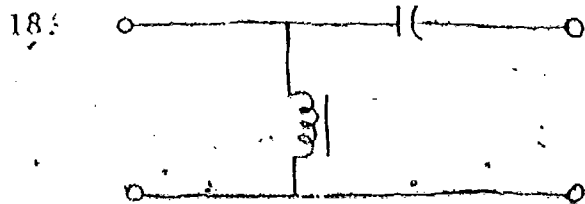

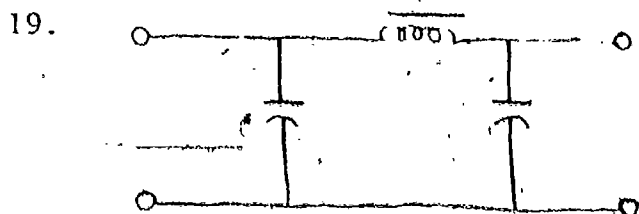

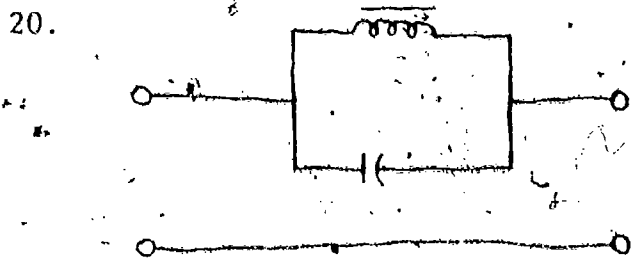

Unit IX--AC Circuits
Test Key

1. Sine wave
2. sawtooth or ramp wave
3. square wave
4. 8.484
5. 6.67 μ seconds
6. constant power
7. reactance
8. resistance, reactance
9. ohms
10. hysteresis, eddy currents, resistance
11. tap
12. physical separation of two circuits.
13. true power, apparent power
14. 1.59 MHz
15. 187.5 A, 281, 250 W
16. 250Ω , 57°
17. 656Ω
18. High pass
19. Low pass
20. Band reject

Unit X--Semiconductor Fundamentals
Sample Test

1. Atoms held together within a pure semiconductor are held together
 - A. by positive and negative charges
 - B. in random manner
 - C. by covalent bonds
 - D. like the atoms within a conductor
2. Current flow in a semiconductor consists of
 - A. holes only.
 - B. ions
 - C. electrons only
 - D. electrons and holes
3. Which of the following is not a benefit of semiconductor devices?
 - A. Higher reliability
 - B. Lower cost
 - C. Smaller size, less weight
 - D. Higher operating voltages
 - E. Less power consumption
4. What type of semiconductor material utilizes electrons as majority carriers?
 - A. P-type
 - B. N-type
 - C. Trivalent
 - D. Intrinsic
5. Both germanium and silicon materials are made up of atoms that have four electrons in their outer shell. These electrons are referred to as _____ electrons.
6. The basic function of a semiconductor device in an electronic circuit is to
 - A. control current or voltage
 - B. replace vacuum tubes
 - C. simplify design
7. When an electron breaks away from a covalent bond, a hole is created. True or False
8. The resistance of a semiconductor _____ as the temperature decreases.
9. A semiconductor at high temperatures will function as a _____.
10. The two most used materials in making semiconductor electronic components are _____ and _____.

Unit X--Semiconductor Fundamentals
Test Key

1. C
2. D
3. D
4. B
5. Valance
6. A
7. True
8. Increases
9. Conductor
10. Silicon and germanium.

190

Unit XI--Electronic Devices
Sample Test

1. If a positive voltage is applied to the anode of a diode it is said to be in the _____ condition.
2. The white band marks the _____ of the diode.
3. The three basic bi-polar transistor circuits are _____.
4. Define cutoff. _____
5. A thyristor used to control alternating current is called the _____.
6. Name three case styles for integrated circuits. _____
7. A diode that has a controlled avalanche breakdown voltage that can be used as a regulator is the _____ diode.
8. Light emitting diodes produce light in the _____ bias condition.
9. The terminals of a field effect transistor are the _____, and _____.
10. A device whose resistance decreases with light intensity is called a _____.
11. A device used to increase voltage without a transformer is called a _____.
12. An increase in the amplitude of a signal is _____.

True-False:

- T F 13. Light emitting diodes produce light by getting hot.
- T F 14. Integrated circuits are used for digital and analog signals.
- T F 15. The bias on a transistor is its operating point.
- T F 16. Transistors can be used to operate a relay from a small input signal.
- T F 17. The silicon-controlled rectifier is a bi-directional device.
- T F 18. A full wave bridge rectifier can be packaged as a single unit.
- T F 19. Some op-amps require both positive and negative voltage supplies.
- T F 20. Capacitor coupling is used to block excessive currents from the previous stage.

Unit XI--Electronic Devices
Test Key

1. Forward bias
2. cathode
3. common base, common collector, common emitter
4. the bias point at which a transistor no longer conducts
5. TRIAC
6. Can, DIP, flatpack
7. Zener
8. Forward
9. gate, source, drain
10. photoconductive cell
11. voltage multiplier
12. gain
13. false
14. true
15. true
16. true
17. false
18. true
19. true
20. true

Unit XII--Circuit Fabrication,
Sample Test

1. What type of pc board material is used where dimensional stability is not a concern?
 - A. Epoxy glass
 - B. Polyester glass
 - C. Epoxy paper
 - D. Phenolic paper

2. Copper foil is designated by the weight of the copper on the surface; the term "ounce" indicates
 - A. ounces per square inch
 - B. ounces per square foot
 - C. ounces per square meter
 - D. ounces per square centimeter

3. If you are using a one ounce copper clad board what would be the copper surface thickness?
 - A. .001
 - B. .002
 - C. .003
 - D. .004

4. Epoxy glass boards have approximately _____ times the flexural strength of phenolic-paper boards.
 - A. 2
 - B. 4
 - C. 8
 - D. 16

5. Which of the following PC boards would be the most expensive to purchase?
 - A. Phenolic paper, one ounce single-sided board
 - B. Epoxy glass, one ounce single-sided board
 - C. Phenolic paper, one ounce single-sided, sensitized
 - D. Epoxy glass, one ounce double-sided board, sensitized.

6. The chemical process used to remove unwanted copper from a PC board during the subtractive process is called:
 - A. laminating
 - B. etching
 - C. plating
 - D. routing

7. Component leads usually require relatively small mounting holes, however on oversized holes, especially those $\frac{1}{8}$ inch and larger, you should
 - A. increase the drill rpm
 - B. exert greater feed pressure
 - C. use a countersink
 - D. drill a smaller pilot hole first

Unit XII--Sample Test (Continued)

8. The entire process of printed circuit board design starts with a basic document which is the
- master pattern
 - schematic diagram
 - block diagram
 - photo mask
9. What would be the most accurate aid for use in positioning full-size IC pad?
- Reset ink pen
 - Rub-on transfer pads
 - Layout dolls
 - Crepe art tape
10. Before direct pattern artwork can be prepared on a circuit board, the board must be
- etched
 - resist-coated
 - free of grease, dirt and fingerprints
 - exposed to light
11. When exposing a positive type photo-sensitized circuit board, _____ light must be used.
- subdued incandescent
 - incandescent
 - infrared
 - ultraviolet
12. Major circuit defects after etching, such as edge definition, pitting, and voids, can be caused by
- poor adhesion of artwork
 - dirty copper surface
 - improper board preparation
 - all of the above
13. What is the safest etchant to make a printed circuit board?
- ammonium persulfate
 - ferric chloride
 - cupric chloride
 - hydrochloric acid
14. What are the two methods of image transfer suitable for producing several identical circuit board patterns from a single piece of art work?
- screen printing and direct pattern
 - screen printing and photoresist
 - direct etch and direct pattern
 - direct pattern and photoresist

Unit XII--Sample Test (Continued)

15. When working with etchant chemicals in the shop, which of the following should you do for safety's sake?
- A. stir etchants with kitchen utensils
 - B. pour etchants in aluminum trays for mixing
 - C. dispose of the contents after use
 - D. dispose of etchants in the sink
16. Name three tools which can be used for cutting PC boards.
- 1.
 - 2.
 - 3.
17. A cutting tool used to chip off the excess length of component leads is called _____ cutters.
18. Of the four common drill bit sizes listed below, which one has the smallest diameter?
- A. 1/16 inch
 - B. No. 55
 - C. No. 60
 - D. No. 65
19. Of the following, which composition of solder for electronic work would work best?
- A. Lead, nickel, and resin flux
 - B. Nickel, tin, and resin flux
 - C. Tin, lead, and resin flux
 - D. Tin, lead and acid flux
20. A good solder joint will appear
- A. dull
 - B. rough
 - C. shiny
 - D. white

Unit XIII--Introduction to Computer Literacy
Sample Test

1. What is the difference between a microprocessor and a microcomputer?
2. VLSI chips contain at least _____ transistors.
 - A. 50
 - B. 500
 - C. 5,000
 - D. 50,000
3. With what invention could mathematical manipulations be done electronically rather than mechanically by DeForet in 1906?
4. Memory that can be read or written by any selected random address is called _____.
 - A. ROM
 - B. RAM
 - C. PROM
 - D. EPROM
5. A term used in referring to groups of binary digits is called
 - A. nibble
 - B. CPU
 - C. Byte
 - D. bit
6. What is the smallest unit of information in a digital computer?
 - A. Bit
 - B. Byte
 - C. Nibble
 - D. RAM
7. Scientists were first to develop what programming language?
 - A. Cobol
 - B. Basic
 - C. Fortran
 - D. Assembler
8. A program which is normally prepared in typed form on paper and not designed into the circuitry is logically called _____.
9. Prior to magnetic dies what type of magnetic memory was available?
 - A. Punch card
 - B. Magnetic tape
 - C. Paper tape
 - D. All of the above

Unit XIII--Sample Test (Continued)

10. A device which contains arithmetic logic and control units in a single package is called a
- A. microprocessor
 - B. programmable ROM
 - C. main frame
 - D. power supply

Unit XIII--Introduction to Computer Literacy
Test Key

1. A microcomputer is a system containing a microprocessor.
2. D
3. Triode vacuum tube
4. B
5. C
6. A
7. Fortran
8. Software
9. B
10. A

Unit XIV--Robotics: An Introduction for Your Classroom
Sample Test

1. The word robot was first used by Czech novelist, essayist, and dramatist _____ in 1921.
2. In what operation in manufacturing assembly do robots play the biggest part?
3. What industry uses the most industrial robots?
4. What are at least two classes or types of robots?
5. The hand or gripping device is usually attached to the end of the robot's _____.
6. The majority of the industrial robots are stationary? True or False
7. All robots consist of two major component systems. They are the the control system and the
 - A. programmable memory
 - B. stepper motors
 - C. X & Y limit switches
 - D. manipulators
8. List at least three ways a robot can grasp or otherwise handle a job.
 - 1.
 - 2.
 - 3.
9. The shape of the work envelope for a robot is determined almost entirely by what three major axes?
 - 1.
 - 2.
 - 3.
10. Name at least five possible robotic applications for the industrial arts classroom.
 - 1.
 - 2.
 - 3.
 - 4.
 - 5.

Unit XIV--Robotics: An Introduction for Your Classroom
Test Key

1. Karl Capek
2. welding
3. automobile
4. non-servo controlled, servo controlled and remote controlled
5. manipulator
6. true
7. D
8. Mechanical grippers, hooking on to a part, scooping or ladling, electromagnets, vacuum cups, quick disconnect bayonet sockets
9.
 1. jointed arm
 2. spherical coordinate
 3. cylindrical coordinate configurations.
10. spot welding, arc welding, electronic component assembly, machine loading and unloading, material handling, assembly and quality control, research and development, metal casting, using wax instead of molten metal.

200

Unit XV--Industrial Electricity/Electronics
Sample Test

1. Explain how electricity is produced in an AC generator.
2. Define counter EMF and explain its importance to the operation of electric motors.
3. Name four pieces of information found on motor name plates.
4. Name four types of AC motors.
5. Explain how heat is generated in spot welding.
6. List three uses (besides welding) for resistance heating.

True-False:

- T F 7. Electricity can produce chemical reactions.
- T F 8. Aluminum is refined by an electrolysis reaction.
- T F 9. Oxygen can be separated from water by electricity.
- T F 10. High frequency radio waves (microwaves) can be used to produce heat.
- T F 11. Incandescent lights produce light by producing an arc in a gas.
- T F 12. The speed of an AC motor is related to the voltage.
- T F 13. Generators lose power.
- T F 14. Copper can be electrically plated to other metals.
- T F 15. Chlorine gas is produced by electrolysis of salt.

Unit XV--Industrial Electricity?Electronics
Test Key

1. As the armature revolves through the magnetic field, current is induced in the wire. The polarity and amplitude are dependent on speed and angle of armature.
2. Counter EMF is a voltage produced by a motor that opposes the applied voltage. Counter EMF limits the current in the motor to safe levels.
3. Brand; speed, horsepower, voltage, current, cycle, phase, et al
4. Hysteresis, split phase, three phase, repulsion induction, shaded pole
5. As current passes through the weld the resistance of the junction of the dissimilar metals produces heat.
6. Incandescent lamps, arc lamps, radiant heating, infrared heating
7. True
8. True
9. True
10. True
11. False
12. False
13. True
14. True
15. True

202

APPENDIX 2

TOOL LIST

Hand Tools

Alignment Tool (set)
Apron--Rubber/Solvent Resistant
Benders, EMT
Benders, Hickey
Bit, Auger (set)
Bit, Screwdriver (set)
Bit, Speed (set)
Brace, Ratchet
Brake, Box and pan
Breadboards
Brush, Drafting
Brush, Wire
Capacitor, Substitution Box
Chisel, Cold (set)
Coil Winder
Countersink, High Speed
Crimping Tool
Curve Tracer
Desoldering Tool
Die, Letter (set)
Die, Number (set)
Divider, Wing
Drafting Board
Drafting Equipment (set)
Drill, Electric, Portable (1/4")
Drill, Hand (1/4")
Drill Stand, Fractional
Drill, Twist, (letter set)
Drill, Twist (number set)
Drill, Twist, Straight shank (fractional set)
Extension cord
Files (see specifications for listing)
File Card and Brush
File, Jeweler's (set)
File, Needle (set)
Fish Tape
Function/Signal Generator
Gauge, Screw pitch
Gauge, Thickness (feeler)
Gauge, Wire and sheet metal (American)
Gauge, Wire and sheet metal (U.S.S.)
Goggles (spectacles), Clean observation
Grinder, Pedestal
Hammer, Ball peen (12 oz. and 16 oz.)
Hammer, Claw (16 oz.)
I.C. Insertion/Extraction tool
Knife, Electrician's
Level
Light, Extension

Hand Tools (Continued)

Logic probe
Magnet, Bar
Magnet, Horseshoe
Meter, Ammeter
Meter, Galvanoment
Meter, Inductance
Meter, Volt-ohm (multi-range)
Meter, VTVM or Electronic
Neon Test Light
Nibbler, Hand operated
Oiler, Bench
Oilstone, Combination, India
Oilstone, Combination, Silicon carbide
Oscilloscope-15MHZ, Single tract
Oscilloscope-50MHZ, Dual trace
Pipe Cutter
Pipe Reamer
Pliers, Combination (6")
Pliers, Duckbill
Pliers, Diagonal cutting
Pliers, Needle nose
Pliers, Side-cutting
Pliers,, locking jaw
Power supply
Press, Drill
Punch, Center (set)
Punch, Chassis (round set)
Punch, Chassis (square set)
Punch, Pin (set)
Punch, Whitney hand
Reamer, Electrician's hand
Resistor, Substitution Box
Rule, Steel (12")
Rule, Folding
Saw, Coping
Saw, Hack (hand)
Saw, Hand, Crosscut
Saw, Reciprocal
Scissors
Screwdriver, Insulated (set)
Screwdrive, Phillips (set)
Screwdriver, Retaining type
Shear, Squaring foot
Shield, Face
Signal Tracer
Snip, Aviation (left)
Snip, Aviation (right)
Snips, Tinner's, Straight (#8)
Soldering Copper, Electric pencil
Soldering Pencil--controlled heat, ground tip

205

Hand Tools (Continued)

Soldering Gun, Electric
Square, Combination
Square, Steel Framing
Square, Try (6")
Strip Heater--Plastic
Tap and Die, NC (U.S. standard) (set)
Tap and Die, NF (S.A.E.) (set)
Tap and Die, Pipe (set)
Tester, Transistor
Tester, Tube
Tray--Plastic--Acid Resistant
Welder, Spot
Wire Wrapping tools--Hand
Wrench, Adjustable end (6")
Wrench, Allen key (hex) (set)
Wrench, Nutdriver (set)
Wrench, Open end (set)
Wrench, Socket (3/8" drive) (set)
Vise, Circuit Board

APPENDIX 3

FIRE EXTINGUISHERS

207

136

Fire Extinguisher

Each fire extinguisher bears a letter (which usually has a metallic or green background) which indicates what class of fire the extinguisher will successfully put out. Water types of extinguishers, which are effective for Class A fires, can be of several kinds: stored pressure, cartridge operated, water pump tank, and soda acid.








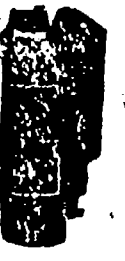




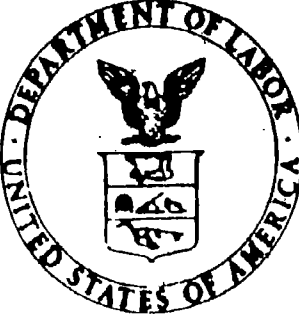


Foam extinguishers are successful for Class A and B fires, while carbon dioxide and sodium and potassium bicarbonate dry chemical extinguishers are effective for only Class B and C fires. Multipurpose ABC dry chemical extinguishers, in either stored pressure or cartridge operated types, work for A, B, or C classes of fires. Class D fires should only be fought with special extinguishing agents approved by recognized testing laboratories (see chart on the following page).

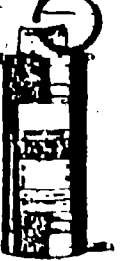If clothing should catch on fire, avoid panic. The flames should be smothered by wrapping in a blanket or coat, or by rolling on the floor or ground.

Fire Prevention

1. Do not overload electrical circuits.
2. Do not use frayed or defective electrical cords.
3. Do not allow any electrical repairs to be made by the students unless they are supervised by the instructor.
4. Do not use gasoline for anything except to run an engine.
5. Do not prime the engine with gasoline while it is running.
6. Do not weld near gas tanks, fuel lines, or any combustible materials.
7. Retain gasoline and store it in a safety can only.
8. If a fire should occur, use the proper extinguishers (see chart on the following page).
 - A. Carbon dioxide: all electrical equipment
 - B. Foam: oils, gasoline, grease, or paint
 - C. Soda-acid: wood, cloth, paper or rubbish
 - D. Vaporizing liquids: general purpose
9. If a fire cannot be readily extinguished, keep calm, evacuate the shop immediately, and turn in an alarm.

KNOW YOUR FIRE EXTINGUISHERS

	WATER TYPE				FOAM	CARBON DIOXIDE	DRY CHEMICAL			
	 STORED PRESSURE	 CARTRIDGE OPERATED	 WATER PUMP TANK	 SODA ACID	 FOAM	 CO ₂	 CARTRIDGE OPERATED	 STORED PRESSURE	 STORED PRESSURE	 CARTRIDGE OPERATED
CLASS A FIRES WOOD, PAPER, TRASH HAVING GLOWING EMBERS 	YES	OBSOLETE	YES	OBSOLETE	OBSOLETE	NO (BUT WILL CONTROL SMALL SURFACE FIRES)	NO (BUT WILL CONTROL SMALL SURFACE FIRES)	NO (BUT WILL CONTROL SMALL SURFACE FIRES)	YES	YES
CLASS B FIRES FLAMMABLE LIQUIDS, GASOLINE, OIL, PAINTS, GREASE, ETC. 	NO	UPDATE YOUR FIRE EXTINGUISHING CAPABILITY—ASK FOR "TRADE-IN UPDATE" PRICE	NO	UPDATE YOUR FIRE EXTINGUISHING CAPABILITY—ASK FOR "TRADE-IN UPDATE" PRICE	UPDATE YOUR FIRE EXTINGUISHING CAPABILITY—ASK FOR "TRADE-IN UPDATE" PRICE	YES	YES	YES	YES	YES
CLASS C FIRES ELECTRICAL EQUIPMENT 	NO		NO			YES	YES	YES	YES	YES
CLASS D FIRES COMBUSTIBLE METALS 	SPECIAL EXTINGUISHING AGENTS APPROVED BY RECOGNIZED TESTING LABORATORIES									
METHOD OF OPERATION	PULL PIN-SQUEEZE HANDLE	OBSOLETE	PUMP HANDLE	OBSOLETE	OBSOLETE	PULL PIN-SQUEEZE LEVER	RUPTURE CARTRIDGE-SQUEEZE LEVER	PULL PIN-SQUEEZE HANDLE	PULL PIN-SQUEEZE HANDLE	RUPTURE CARTRIDGE-SQUEEZE LEVER
RANGE	30' - 40'	UPDATE YOUR FIRE EXTINGUISHING CAPABILITY—ASK FOR "TRADE-IN UPDATE" PRICE	30' - 40'	UPDATE YOUR FIRE EXTINGUISHING CAPABILITY—ASK FOR "TRADE-IN UPDATE" PRICE	UPDATE YOUR FIRE EXTINGUISHING CAPABILITY—ASK FOR "TRADE-IN UPDATE" PRICE	3' - 8'	5' - 20'	5' - 20'	5' - 40'	5' - 20'
MAINTENANCE	CHECK AIR PRESSURE GAUGE MONTHLY	UPDATE YOUR FIRE EXTINGUISHING CAPABILITY—ASK FOR "TRADE-IN UPDATE" PRICE	DISCHARGE AND FILL WITH WATER ANNUALLY	UPDATE YOUR FIRE EXTINGUISHING CAPABILITY—ASK FOR "TRADE-IN UPDATE" PRICE	UPDATE YOUR FIRE EXTINGUISHING CAPABILITY—ASK FOR "TRADE-IN UPDATE" PRICE	WEIGH SEMI-ANNUALLY	WEIGH GAS CARTRIDGE—CHECK CONDITION OF DRY CHEMICAL ANNUALLY	CHECK PRESSURE GAUGE AND CONDITION OF DRY CHEMICAL ANNUALLY	CHECK PRESSURE GAUGE AND CONDITION OF DRY CHEMICAL ANNUALLY	WEIGH GAS CARTRIDGE—CHECK CONDITION OF DRY CHEMICAL ANNUALLY

NOTES:

Class D Fires - In hot metal areas which may use magnesium, titanium, zirconium, and sodium, one must provide Type D extinguishers or D rated dry chemical available for use on metal fires. It is important to use the correct extinguisher on the proper class of fire.

APPENDIX 4
SAFETY RECORDKEEPING

Safety Recordkeeping

One of the primary reasons for keeping health and safety records is to focus attention on problem areas so that corrective measures can be taken. The evaluation of accidents that have occurred, using a specific form like the one presented in this section, requires that the instructor look for causes and make plans to correct any problems which may be present. Good safety record-keeping in this area also provides a basis for evaluating the safety program in use and initiating needed changes in procedures, or facilities.

Safety records may also help to protect the instructor and the institution in the event of lawsuits. Although parental permission forms, safety tests, and safety instruction records do not provide a complete defense against such actions, they do tend to show the instructor was acting in "good faith" and may be construed as a partial defense in some courts.

Sample record forms, both a school's records and an instructor's records, are presented at the end of this unit. They may be reproduced or modified to fit the needs of a particular teacher or institution. The purpose or use of these forms is outlined below. Also included are copies of OSHA forms #100, #101, and #102, required of businesses and institutions that are under OSHA provisions.

School Records

1. Accident forms

- A. Accident reports should be made out as soon as possible after an accident has occurred. Copies of the reports should be retained in the instructor's file. Additional copies should be filed in the appropriate administrative offices.
- B. A variety of accident report forms are available; however, they should all contain the following information when completed.
 1. What was the nature of the accident? What were the circumstances leading up to the accident? What was the nature of the injuries or damage? What were the persons involved doing? What unsafe act or acts were committed? What were the direct or indirect causes? What machine, tool, substance, or object was most closely connected with the accident? What corrective action is indicated?
 2. Who was injured or nearly injured? Who were the participants in the accident? Who committed the unsafe act? Who were the witnesses? Who administered first aid to the injured? Who completed the accident report?
 3. Where did the accident occur? Where was the instructor at the time of the accident? Where was the injured person with respect to the machine, tool, substance, object, or person most closely associated with the accident?

4. When did the accident occur? When was the accident investigation made? When was the accident report completed?
5. Why was the unsafe act or hazardous condition permitted? Why did the person act unsafely? Why did the accident occur?
6. How did the accident happen? How did the physical environment contribute to the accident? How can similar future accidents be prevented?

II. Records of Safety Committee Meetings

Each institution's safety committee should meet periodically to discuss the safety program being used and to review recommendations for improving the program.

III. Safety Inspection Records

Records of every inspection conducted in the vocational education and industrial arts laboratory should be filed by the institution.

IV. School-Wide Safety Efforts and Programs

Information detailing the program in use in the school should be on file in the main office.

Teacher Records

I. Safety Instruction Records

Records of safety inspections, schedules of safety talks, and signed sheets acknowledging safety instruction should be kept by the instructor.

II. Parental Permission/Consent Forms

Written parental permission should be obtained before minor students are permitted to use tools and operate equipment in industrial education laboratories. The purpose of this permission is to emphasize that safety is a cooperative effort, and to impress upon both students and parents that there is a certain degree of danger involved in the use of tools and equipment. It also offers the parent the option to prohibit the student's use of tools or equipment, if so desired.

III. Safety Tests

Instructors should administer appropriate safety tests to students before allowing them to use tools or equipment which could cause injury. The completed tests should be filed for reference. In addition to the test, a "statement of acknowledgment" should be filed with the safety test.

IV. Hazardous Conditions Reports

Any potential health or safety hazard should be reported in writing. Reports should be kept on file, noting the action that has been taken to alleviate the hazardous condition.

OSHA Records

Records required by the Federal Occupational Safety and Health Act are included here to provide administrators and instructors a guide for some other types of records.

- I. Form #100 - Log of Occupational Injuries and Illnesses
- II. Form #101 - Supplementary Record of Occupational Injuries and Illnesses
- III. Form #102 - Summary of Occupational Injuries and Illnesses for Calendar Year

STANDARD STUDENT ACCIDENT REPORT-FORM
Part A. Information on ALL Accidents

1. Name: _____ Home Address: _____
2. School: _____ Sex: M F Age _____ Grade or classification: _____
3. Time accident occurred: Hour _____ A.M. _____ P.M. Date: _____
4. Place of Accident: School Building School Grounds To or from School
Home Elsewhere

NATURE OF INJURY	Abrasion _____ Fracture _____ Amputation _____ Laceration _____ Asphyxiation _____ Poisoning _____ Bite _____ Puncture _____ Bruise _____ Scalds _____ Burn _____ Scratches _____ Concussion _____ Shock (el.) _____ Cut _____ Sprain _____ Dislocation _____ Other (specify) _____	DESCRIPTION OF THE ACCIDENT How did accident happen? What was student doing? Where was student? List specifically unsafe acts and unsafe conditions existing. Specify any tool, machine or equipment involved.
	Abdomen _____ Foot _____ Ankle _____ Hand _____ Arm _____ Head _____ Back _____ Knee _____ Chest _____ Leg _____ Ear _____ Mouth _____ Elbow _____ Nose _____ Eye _____ Scalp _____ Face _____ Tooth _____ Finger _____ Wrist _____ Other (specify) _____	

6. Degree of Injury: Death Permanent Impairment Temporary Disability Nondisabling
7. Total number of days lost from school: _____ (To be filled in when student returns to school)

Part B. Additional Information on School Jurisdiction Accidents

8. Teacher in charge when accident occurred (enter name) _____
Present at scene of accident: No Yes

IMMEDIATE ACTION TAKEN	First-aid treatment _____ By (name): _____
	Sent to school nurse _____ By (name): _____
	Sent home _____ By (name): _____
	Sent to physician _____ By (name): _____ Physician's Name: _____
	Sent to hospital _____ By (name): _____ Name of Hospital: _____

10. Was a parent or other individual notified? No Yes When _____ How _____
Name of parent notified _____
By whom? (enter name) _____

1. Witnesses: 1. Name _____ Address _____
2. Name _____ Address _____

LOCATION	Specify Activity		Specify Activity	Remarks
				What recommendations do you have for preventing other accidents of this type?
Athletic field	Locker			
Auditorium	Pool			
Cafeteria	Sch. grounds			
Classroom	shop			
Corridor	Showers			
Dressing room	Stairs			
Gymnasium	Toilets & washrooms			
Home Econ.	Other (specify)			
Laboratories				

Signed: Principal _____ Teacher _____

CAUSE: Unsafe Acts (mark basic cause)

1. operating without authority
2. operating at unsafe speed
3. making safety device inoperative
4. using unsafe equipment or equipment unsafely
5. unsafe loading, placing, mixing
6. taking unsafe position
7. working on moving or dangerous equipment
8. distraction, teasing, horseplay
9. failure to use personal protective devices

Why was the unsafe act committed? _____

Unsafe conditions (mark contributing cause, if any)

10. inadequately guarded
11. defective tools, equipment or substance
12. hazardous arrangement
13. unsafe illumination
14. unsafe ventilation
15. unsafe clothing
16. unguarded
17. unsafe design or construction

Why did the unsafe condition exist? _____

GUIDES TO CORRECTIVE ACTION:

Unsafe Act

1. Stop
2. Study
3. Instruct (tell--show--try--check)
4. Train
5. Maintain discipline

Unsafe Condition

1. Remove
2. Guard
3. Warn
4. Recommend for (a) own supervisor, or (b) other supervisors, or (c) safety committee, or (d) maintenance dept., or (e) _____
5. Follow up

Based on the cause checked above, indicate below the corrective action you are taking.

What have you done to prevent similar injuries? _____



MINUTES OF SAFETY COMMITTEE MEETING

School _____ Date _____

Address _____ Time Meeting Opened _____

Members Present: _____ Absent: _____

Minutes of previous meeting dated _____ were read.

Comments: _____

UNFINISHED BUSINESS AND OLD RECOMMENDATIONS, BY NUMBER ONLY, NOT DISPOSED OF:

RECOMMENDATIONS COMPLETED SINCE LAST MEETING: (Record by recommendation number only)

NEW BUSINESS:

_____ Inspection reports were reviewed and discussed.

NEW RECOMMENDATIONS: (Number consecutively from previous recommendations and describe.)

REMARKS: The following accidents which occurred since the last meeting were discussed:

Date of Injury	Employee	Cause	Recommendations

OTHER COMMITTEE REMARKS: _____

Are Safety Posters being regularly received and posted? _____

Put additional remarks on the reverse side

Meeting adjourned _____ Next meeting to be held _____

Signed _____

Secretary of Committee

ACKNOWLEDGEMENT OF SAFETY INSTRUCTION AND PLEDGE

I have received the SAFETY INSTRUCTIONS regarding the operation of the following power driven machines. I fully understand the importance of these rules and regulations, and I am fully aware that the violation of any one of them may endanger myself and others.

My instructor has demonstrated to me the proper methods of using each machine listed below and has pointed out the safety precautions necessary to avoid injury.

I have demonstrated my ability to use each machine listed below in the presence of my teacher. I understand the safety precautions involved and I understand how to ensure my safety through the proper use of the machines. I am confident that I can operate these machines safely. When in doubt about the operation of any machine or other equipment, I will consult the teacher before proceeding.

(Name of each machine to be written in by the pupil after he/she has passed the safety test and demonstrated the ability to use it.)

NAME OF MACHINE	DATE	STUDENT'S SIGNATURE	TEACHER'S INITIALS
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			

I have passed the tests covering safety in the shop and the use of the above-listed machines.

I promise to observe the SAFETY INSTRUCTIONS and to follow the instructions given in the demonstration. I may use the machines only after I have been properly instructed in their safe use, and I have received the approval of the teacher.

School _____ Signed _____ pupil
 Date _____ Instructor _____

SAMPLE PERMISSION FORM

_____ has our/my permission to operate the
(student's name)
equipment in the _____ laboratory
at _____ School. It is understood

that instruction in its safe operation will be given before he/she is allowed to
use any piece of equipment and that he/she will be properly supervised at all times.

In the case of an accident, it is preferred that he/she be given treatment by:

Dr: _____

or Dr: _____

Our home phone number is: _____

Our work phone number is: _____

If neither parent/guardian can be reached at the above numbers, please notify:

_____ at _____
(responsible person) (telephone number)

Date: _____

Signed: _____
(father/guardian)

(mother/guardian)

(other—specify relationship)

HAZARDOUS CONDITIONS REPORT

Date _____

TO _____
(Building Administrator) (Position) (School)

Description and Location of Health or Safety Hazard

Suggested Solution

Teacher's signature _____

- Distribution: Original - Building Administrator
1st Copy - Department Chairperson
2nd Copy - Teacher Reporting Hazard
3rd Copy - Parish Safety Officer

Action Taken

By Whom _____
(Signature)

220

148

LOG OF OCCUPATIONAL INJURIES AND ILLNESSES

RECORDABLE CASES You are required to record information about every occupational injury, every nonfatal occupational illness, and those nonfatal occupational injuries which involve one or more of the following: loss of consciousness; restriction of work or motion; transfer to another job; or medical treatment (other than first aid). More complete definitions appear on the other side of this form.

Form Approved
OSHA No. 440 (1-5)

CASE OR FILE NUMBER	DATE OF INJURY OR ONSET OF ILLNESS	EMPLOYEE'S NAME <small>(First name or initial, middle initial, last name)</small>	OCCUPATION <small>(Enter regular job title, not activity employee was performing when injured or onset of illness.)</small>	DEPARTMENT <small>(Enter department in which the employee is regularly employed.)</small>	DESCRIPTION OF INJURY OR ILLNESS <small>Nature of injury or illness and Part(s) of Body Affected (Typical entries for this column might be: Amputation of 1st joint right forefinger; Strain of lower back; Contact dermatitis on both hands; Electrocution - body)</small>	Injury or Illness Code <small>(See codes at bottom of page.)</small>	DEATHS <small>(Enter date of death.)</small>	EXTENT OF AND OUTCOME OF CASES				
								LOST WORKDAY CASES			NONFATAL CASES WITHOUT LOST WORKDAYS <small>(Enter a check if no entry was made in columns 9 or 10 but the case is reportable, as defined above.)</small>	TERMINATIONS OR PERMANENT TRANSFERS <small>(Enter a check if the entry in column 9 or 10 represented a termination or permanent transfer.)</small>
								<small>Enter a check if case involved lost workdays.</small>	<small>Enter number of days AWAY FROM WORK due to injury or illness.</small>	<small>Enter number of days of RESTRICTED WORK ACTIVITY due to injury or illness.</small>		
(1)	No May/yr. (2)	(3)	(4)	(5)	(6)	(7)	No May/yr. (8)	(9)	(10)	(11)	(12)	

149

Company Name _____
Establishment Name _____
Establishment Address _____

NOTE: This is NOT a report form. Keep it in the establishment for 5 years.

- Injury Code
is an occupational injury
Illness Code
- 21 Occupational skin diseases or disorders
 - 22 Dust diseases of the lungs (pneumoconiosis)
 - 23 Respiratory conditions due to toxic agents
 - 24 Poisoning (systemic effects of toxic materials)
 - 25 Disorders due to physical agents (other than toxic materials)
 - 26 Disorders associated with repeated trauma
 - 29 All other occupational illnesses



CHANGES IN EXTENT OF OR OUTCOME OF INJURY OR ILLNESS

If during the 3 year period the log must be retained, there is a change in a case which affects entries in columns 9 or 10, the first entry should be lined out and a new entry made. For example, if an injured employee at first required only medical treatment but later lost workdays the check in column 10 should be lined out, a check entered in column 9, and the number of lost workdays entered in columns 9A and/or 9B.

In another example, if an employee with an occupational

illness lost workdays, returned to work, and then died of the illness, the entries in columns 9, 9A, and/or 9B should be lined out and the date of death entered in column 8.

The entire entry for a case should be lined out if the case is later found to be nonrecordable. Examples are: A case which is later determined not to be work related, or a case which was initially thought to involve medical treatment but later was determined to have involved only first aid.

DEFINITIONS

RECORDABLE OCCUPATIONAL INJURIES AND ILLNESSES are:

- 1) **OCCUPATIONAL DEATHS**, regardless of the time between injury and death, or the length of the illness; or
- 2) **OCCUPATIONAL ILLNESSES**; or
- 3) **OCCUPATIONAL INJURIES** which involve one or more of the following: loss of consciousness, suspension of work or motion, transfer to another job, or medical treatment (this first and).

NOTE: Any case which involves lost workdays must be recorded since it always involves one or more of the criteria for recordability.

OCCUPATIONAL INJURY is any injury such as a cut, fracture, sprain, amputation, etc., which results from a work accident or from an exposure involving a single incident in the work environment.

Illnesses resulting from animal bites, such as rabies or snake bites, or from one-time exposure to chemicals are considered to be injuries.

OCCUPATIONAL ILLNESS of an employee is any abnormal condition or disorder, other than one resulting from an occupational injury caused by exposure to environmental factors associated with employment. It includes acute and chronic illnesses or disorders which may be caused by inhalation, absorption, ingestion, or direct contact.

The following listing gives the categories of occupational illnesses and disorders that will be utilized for the purpose of classifying recordable illnesses. The identifying codes are those to be used in column 7 of the log. For purposes of information, examples of each category are given. These are typical examples, however, and are not to be considered to be the complete listing of the types of illnesses and disorders that are to be counted under each category.

- (11) **Occupational Skin Diseases or Disorders**
Examples: Contact dermatitis, eczema, or rash caused by primary irritants and sensitizers or poisonous plants, and acute chemical burns, thermal burns or inflammations, etc.
- (12) **Dust Diseases of the Lung (Pneumoconiosis)**
Examples: Silicosis, asbestosis, coal worker's pneumoconiosis, byssinosis and other pneumoconioses.
- (13) **Respiratory Conditions Due to Toxic Agents**
Examples: Pneumonitis, pharyngitis, rhinitis or acute congestion due to chemicals, dusts, gases or fumes, farmer's lung, etc.
- (14) **Poisoning (Systemic Effects of Toxic Materials)**
Examples: Poisoning by lead, mercury, aluminum, arsenic, or other metals; poisoning by carbon monoxide, hydrogen sulfide or other gases; poisoning by bromine, carbon tetrachloride, or other

organic solvents, poisoning by insecticide sprays such as parathion, lead acetate, poisoning by other chemicals such as formaldehyde, plastics and resins, etc.

(25) **Disorders Due to Physical Agents (Other Than Toxic Materials)**
Examples: Heatstroke, sunstroke, heat exhaustion and other effects of atmospheric heat; freezing, frostbite and effects of exposure to low temperatures; carbon disease, effects of ionizing radiation (ultraviolet, X-rays, radium); effects of nonionizing radiation (infrared flash, ultraviolet rays, microwaves, tunburin) etc.

(26) **Disorders Associated With Repeated Trauma**
Examples: Noise induced hearing loss, tinnitus, teno-synovitis, and bursitis; Raynaud's phenomena, and other conditions due to repeated motion, vibration or pressure.

(29) **All Other Occupational Illnesses**
Examples: Anthrax, brucellosis, infectious hepatitis, malignant and benign tumors, food poisoning, histoplasmosis, leishmaniasis, mycosis, etc.

MEDICAL TREATMENT includes treatment (other than first aid) administered by a physician or by registered professional personnel under the standing orders of a physician. Medical treatment does NOT include first aid treatment (one-time treatment and subsequent observation of minor scrapes, cuts, burns, splinters, and so forth, which do not ordinarily require medical care) even though provided by a physician or registered professional personnel.

ESTABLISHMENT is a single physical location where business is conducted or where services or industrial operations are performed (for example, a factory, mill, store, hotel, restaurant, movie theater, farm, ranch, bank, sales office, warehouse, or central administrative office). Where distinctly separate activities are performed at a single physical location (such as contract construction activities operated from the same physical location as a lumber yard), each activity shall be treated as a separate establishment.

For firms engaged in activities such as agriculture, construction, transportation, communications, and electric, gas and sanitary services, which may be physically dispersed, records may be maintained at a place to which employees report each day.

Records for personnel who do not primarily report or work at a single establishment, such as traveling salesmen, technicians, engineers, etc., shall be maintained at the location from which they are paid or the base from which personnel operate to carry out their activities.

WORK ENVIRONMENT is comprised of the physical location, equipment, materials processed or used, and the kind of operations performed by an employee in the performance of his work, whether on or off the employer's premises.

LOG OF OCCUPATIONAL INJURIES AND ILLNESSES

Each employer who is subject to the recordkeeping requirements of the Occupational Safety and Health Act of 1970 must maintain for each establishment a log of all recordable occupational injuries and illnesses. This form (OSHA No. 100) may be used for that purpose. A substitute for the OSHA No. 100 is acceptable if it is as detailed, easily readable and understandable as the OSHA No. 100.

Each recordable occupational injury and occupational illness must be timely entered on the log. Logs must be kept current and retained for five (5) years following the end of the calendar year to which they relate. Logs must be available on readily at the establishment for inspection and copying by representatives of the Department of Labor, or the Department of Health, Education and Welfare, or State-accorded jurisdiction under the Act.

INSTRUCTIONS FOR COMPLETING LOG OF OCCUPATIONAL INJURIES AND ILLNESSES

Column 1 - CASE OR FILE NUMBER
Enter a number which will facilitate comparison with supplementary records. Any series of non-duplicating numbers may be used.

Column 2 - DATE OF INJURY OR ONSET OF ILLNESS
For occupational injuries enter the date of the work accident which resulted in injury. For occupational illnesses enter the date of initial diagnosis of illness, or, if absence from work occurred before diagnosis, enter the first day of the absence attributable to the illness which was later diagnosed or recognized.

Column 3 - EMPLOYEE'S NAME

Column 4 - OCCUPATION
Enter regular job title, not the specific activity being performed at time of injury or illness. In the absence of a formal occupational title, enter a brief description of the duties of the employee.

Column 5 - DEPARTMENT
Enter the name of the department or division in which the injured person is regularly employed, even though temporarily working in another department at the time of injury or illness. In the absence of formal department titles, enter a brief description of normal workplace to which employee is assigned.

Column 6 - NATURE OF INJURY OR ILLNESS AND PART(S) OF BODY AFFECTED

Enter a brief description of the injury or illness and indicate the part or parts of body affected. Where entire body is affected, the entry "body" can be used.

Column 7 - INJURY OR ILLNESS CODE
Enter the one code which most accurately describes the case. A list of the codes appears at the bottom of the log. A more complete description of recordable occupational injuries and illnesses appears in "DEFINITIONS."

Column 8 - DEATHS
If the occupational injury or illness resulted in death, enter date of death.

Column 9 - LOST WORKDAY CASES
Enter a check for each case which involves days away from work, or days of restricted work activity, or both. Each lost workday case also requires an entry in column 9A or column 9B, or both.

Column 9A - LOST WORKDAYS - DAYS AWAY FROM WORK

Enter the number of work days (consecutive or not) on which the employee would have worked but could not because of occupational injury or illness. The number of lost workdays should not include the day of injury or onset of illness or any days on which the employee would not have worked even though able to work.

NOTE: For employees not having a regularly scheduled shift, i.e. certain truck drivers, construction workers, farm labor, casual labor, part-time employees, etc., it may be necessary to estimate the number of lost workdays. Estimates of lost workdays shall be based on prior work history of the employee AND days worked by employees, not ill or injured, working in the department and/or occupation of the ill or injured employee.

Column 9B - LOST WORKDAYS - DAYS OF RESTRICTED WORK ACTIVITY

Enter the number of workdays (consecutive or not) on which because of injury or illness:

- 1) the employee was assigned to another job on a temporary basis, or
- 2) the employee worked at a permanent job less than full time, or
- 3) the employee worked at a permanently assigned job but could not perform all duties normally connected with it.

The number of lost workdays should not include the day of injury or onset of illness or any days on which the employee would not have worked even though able to work.

Column 10 - NONFATAL CASES WITHOUT LOST WORKDAYS

Enter a check for any recordable case which does not involve a fatality or lost workdays.

Column 11 - TERMINATIONS OR PERMANENT TRANSFERS

Enter a check if the entry in columns 4 or 10 represents a termination of employment or permanent transfer.

Supplementary Record of Occupational Injuries and Illnesses

EMPLOYER

1. Name _____
2. Mail address _____
(No. and street) (City or town) (State)
3. Location, if different from mail address _____

INJURED OR ILL EMPLOYEE

4. Name _____ Social Security No. _____
(First name) (Middle name) (Last name)
5. Home address _____
(No. and street) (City or town) (State)
6. Age _____ 7. Sex: Male _____ Female _____ (Check one)
8. Occupation _____
(Enter regular job title, not the specific activity he was performing at time of injury.)
9. Department _____
(Enter name of department or division in which the injured person is regularly employed, even though he may have been temporarily working in another department at the time of injury.)

THE ACCIDENT OR EXPOSURE TO OCCUPATIONAL ILLNESS

10. Place of accident or exposure _____
(No. and street) (City or town) (State)

If accident or exposure occurred on employer's premises, give address of plant or establishment in which it occurred. Do not indicate department or division within the plant or establishment. If accident occurred outside employer's premises at an identifiable address, give that address. If it occurred on a public highway or at any other place which cannot be identified by number and street, please provide place references locating the place of injury as accurately as possible.

11. Was place of accident or exposure on employer's premises? _____ (Yes or No)
12. What was the employee doing when injured? _____
(Be specific. If he was using tools or equipment or handling material, name them and tell what he was doing with them.)

13. How did the accident occur? _____
(Describe fully the events which resulted in the injury or occupational illness. Tell what happened and how it happened. Name any objects or substances involved and tell how they were involved. Give full details on all factors which led or contributed to the accident. Use separate sheet for additional space.)

OCCUPATIONAL INJURY OR OCCUPATIONAL ILLNESS

14. Describe the injury or illness in detail and indicate the part of body affected. _____
(e.g.: amputation of right index finger at second joint; fracture of ribs; lead poisoning; dermatitis of left hand, etc.)

15. Name the object or substance which directly injured the employee. (For example, the machine or thing he struck against or which struck him; the vapor or poison he inhaled or swallowed; the chemical or radiation which irritated his skin; or in cases of strains, hernias, etc., the thing he was lifting, pulling, etc.) _____

16. Date of injury or initial diagnosis of occupational illness _____ (Date)

17. Did employee die? _____ (Yes or No)

OTHER

18. Name and address of physician _____
19. If hospitalized, name and address of hospital _____
Date of report _____ Prepared by _____
Official position _____



SUPPLEMENTARY RECORD OF OCCUPATIONAL INJURIES AND ILLNESSES

To supplement the Log of Occupational Injuries and Illnesses (OSHA No. 100), each establishment must maintain a record of each recordable occupational injury or illness. Workmen's compensation, insurance, or other reports are acceptable as records if they contain all facts listed below or are supplemented to do so. If no suitable report is made for other purposes, this form (OSHA No. 101) may be used or the necessary facts can be listed on a separate plain sheet of paper. These records must also be available in the establishment without delay and at reasonable times for examination by representatives of the Department of Labor and the Department of Health, Education and Welfare, and States accorded jurisdiction under the Act. The records must be maintained for a period of not less than five years following the end of the calendar year to which they relate.

Such records must contain at least the following facts:

- 1) *About the employer*—name, mail address, and location if different from mail address.
- 2) *About the injured or ill employee*—name, social security number, home address, age, sex, occupation, and department.
- 3) *About the accident or exposure to occupational illness*—place of accident or exposure, whether it was on employer's premises, what the employee was doing when injured, and how the accident occurred.
- 4) *About the occupational injury or illness*—description of the injury or illness, including part of body affected; name of the object or substance which directly injured the employee; and date of injury or diagnosis of illness.
- 5) *Other*—name and address of physician; if hospitalized, name and address of hospital; date of report; and name and position of person preparing the report.

SEE DEFINITIONS ON THE BACK OF OSHA FORM 100.

226

Complete no later than one month after close of calendar year. See back of this form for posting requirements and instructions.

**SUMMARY
OF
OCCUPATIONAL INJURIES AND ILLNESSES
FOR CALENDAR YEAR 19__**

Use previous edition of this form for summarizing your 1974 cases. This edition is for summarizing your cases for 1975 and subsequent years.

Establishment:
NAME _____
ADDRESS _____

INJURY AND ILLNESS CATEGORY	TOTAL CASES	DEATHS	LOST WORKDAY CASES				NONFATAL CASES WITHOUT LOST WORKDAYS	TERMINATIONS OR PERMANENT TRANSFERS	
			Total Lost Workday Cases	Cases Involving Days Away From Work	Days Away From Work	Days of Restricted Work Activity			
CATEGORY	CODE	Number of entries in Col. 7 of the log. (1)	Number of entries in Col. 8 of the log. (2)	Number of checks in Col. 9 of the log. (3)	Number of entries in Col. 9A of the log. (4)	Sum of entries in Col. 9A of the log. (5)	Sum of entries in Col. 9B of the log. (6)	Number of checks in Col. 10 of the log. (7)	Number of checks in Col. 11 of the log. (8)
OCCUPATIONAL INJURIES	10								
Occupational Skin Diseases or Disorders	21								
Dust Diseases of the Lungs	22								
Respiratory Conditions Due to Toxic Agents	23								
Poisoning (Systemic Effects of Toxic Materials)	24								
Disorders Due to Physical Agents	25								
Disorders Associated With Repeated Trauma	26								
All Other Occupational Illnesses	29								
TOTAL-OCCUPATIONAL ILLNESSES (Sum of codes 21 through code 29)	30								
TOTAL-OCCUPATIONAL INJURIES AND ILLNESSES (Sum of code 10 and code 30)	31								

This is NOT a report form. Keep it in the establishment for 5 years.

I certify that this Summary of Occupational Injuries and Illnesses is true and complete, to the best of my knowledge.

Signature _____
Title _____
Date _____

BEST COPY AVAILABLE

SUMMARY OF OCCUPATIONAL INJURIES AND ILLNESSES

Every employer who is subject to the recordkeeping requirements of the Occupational Safety and Health Act of 1970 must use this form to prepare an annual summary of the occupational injury and illness experience of the employees in each of his establishments within one month following the end of each year.

POSTING REQUIREMENTS: A copy or copies of the summary must be posted at each establishment in the place or places where notices to employees are customarily posted. This summary must be posted no later than February 1 and must remain in place until March 1.

INSTRUCTIONS for completing this form: All entries must be summarized from the log (OSHA No. 100) or its equivalent. Before preparing this summary, review the log to be sure that entries are correct and each case is included in only one of the following classes: deaths (date in column 8), lost workday cases (check in column 9), or nonfatal cases without lost workdays (check in column 10). If an employee's loss of workdays is continuing at the time the summary is being made, estimate the number of future workdays he will lose and add that estimate to the workdays he has already lost and include this total in the summary. No further entries are to be made with respect to such cases in the next year's summary.

Occupational injuries and the seven categories of occupational illnesses are to be summarized separately. Identify each case by the code in column 7 of the log of occupational injuries and illnesses.

The summary from the log is made as follows:

- A. For occupational injuries (identified by a code 10 in column 7 of the log form) make entries on the line for code 10 of this form.

Column 1—Total Cases. Count the number of entries which have a code 10 in column 7 of the log. Enter this total in column 1 of this form. This is the total of occupational injuries for the year.

Column 2—Deaths. Count the number of entries (date of death) for occupational injuries in column 8 of the log.

Column 3—Total Lost Workday Cases. Count the number of checks for occupational injuries in column 9 of the log.

Column 4—Cases Involving Days Away From Work. Count the number of entries for occupational injuries in column 9A of the log.

Column 5—Days Away From Work. Add the entries (total days away) for occupational injuries in column 9A of the log.

Column 6—Days of Restricted Work Activity. Add the entries (total of such days) for occupational injuries in column 9B of the log.

Column 7—Nonfatal Cases Without Lost Workdays. Count the number of checks for occupational injuries in column 10 of the log.

Column 8—Terminations or Permanent Transfers. Count the number of checks for occupational injuries in column 11 of the log.

CHECK: If the totals for code 10 have been entered correctly, the sum of columns 2, 3, and 7 will equal the number entered in column 1.

- B. Follow the same procedure for each illness code, entering the totals on the appropriate line of this form.

- C. Add the entries for codes 21 through 29 in each column for occupational illnesses and enter totals on the line for code 30.

- D. Add the entries for codes 10 and 30 in each column and enter totals on the line for code 31.

CHECK: If the summary has been made correctly, the entry in column 1 of the total line (code 31) of this form will equal the total number of cases on the log.

The person responsible for the preparation of the summary shall certify that it is true and complete by signing the statement on the form.

Use previous edition of this form for summarizing your 1974 cases. This edition is for summarizing your cases for 1975 and subsequent years. Forms for the 1974 summary can be obtained from the appropriate State statistical grant agency (if there is one in your State) or from the appropriate Regional Office of the Bureau of Labor Statistics. Addresses are in the booklet entitled Recordkeeping Requirements under the Occupational Safety and Health Act of 1970.

APPENDIX 5

MATH REVIEW

MATH REVIEW

I. Rounding Numbers

1. What is 4386 rounded to the nearest ten?
a) 4280 b) 4380 c) 4390 d) 4400
2. What is 643,849 rounded to the nearest thousand?
a) 643,850 b) 643,800 c) 644,000 d) 640,000
3. What is 9,675,000 rounded to the nearest hundred thousand?
a) 9,670,000 b) 9,675,000 c) 9,680,000 d) 9,700,000

II. Add and Subtract Integers

4.
$$\begin{array}{r} 4326 \\ 9857 \\ 2015 \\ +5634 \\ \hline \end{array}$$
 a) 22,833 b) 21,832 c) 21,742 d) 21,732
5. $3804 + 527 + 96 + 12,485 =$ _____
a) 16,912 b) 15,902 c) 15,911 d) 124,912
6.
$$\begin{array}{r} 512,705 \\ -49,638 \\ \hline \end{array}$$
 a) 463,169 b) 473,177 c) 463,067 d) 463,077

III. Multiply and Divide Integers

7.
$$\begin{array}{r} 836 \\ \times 79 \\ \hline \end{array}$$
 a) 56,044 b) 65,044 c) 66,046 d) 66,044
8. $987 \times 456 =$ _____
a) 440,172 b) 450,072 c) 450,182 d) 451,072
9. $6300 \div 97 =$ _____
a) $64 \frac{92}{97}$ b) $65 \frac{95}{97}$ c) $65 \frac{85}{97}$ d) 66
10. $1498 \div 49 =$ _____
a) $3 \frac{28}{49}$ b) 31 c) $32 \frac{30}{49}$ d) $30 \frac{4}{7}$

IV. Add and Subtract Fractions

11.
$$\begin{array}{r} 7 \frac{5}{6} \\ +2 \frac{3}{6} \\ \hline \end{array}$$
 a) $9 \frac{2}{6}$ b) $10 \frac{1}{3}$ c) $10 \frac{1}{2}$ d) $10 \frac{8}{6}$
12. $5 \frac{1}{2} + 2 \frac{5}{8} =$ _____
a) $9 \frac{1}{8}$ b) $7 \frac{6}{10}$ c) $8 \frac{9}{3}$ d) $7 \frac{6}{16}$

13. $\frac{17 \frac{3}{8}}{-12 \frac{7}{8}}$ a) $4 \frac{6}{8}$ b) $5 \frac{3}{4}$ c) $4 \frac{1}{2}$ d) $5 \frac{1}{2}$

14. $9 \frac{2}{3} - 5 \frac{1}{4} =$ _____
a) $4 \frac{1}{4}$ b) $4 \frac{11}{12}$ c) $3 \frac{5}{12}$ d) $4 \frac{5}{12}$

V. Multiply Fractions

15. $\frac{5}{6} \times 426 =$ _____
a) 71 b) 210 c) 355 d) 356

16. $3 \frac{3}{5} \times \frac{8}{9} =$ _____
a) $\frac{24}{15}$ b) $3 \frac{24}{45}$ c) 3 d) $3 \frac{1}{5}$

17. $12 \times 8 \frac{3}{4} =$ _____
a) $96 \frac{3}{4}$ b) 105 c) 72 d) 100

18. $8 \frac{2}{5} \times 6 \frac{2}{3} =$ _____
a) 56 b) $48 \frac{4}{15}$ c) $48 \frac{4}{8}$ d) 46

VI. Divide Fractions

19. $15 \div \frac{9}{10} =$ _____
a) $9 \frac{10}{15}$ b) $10 \frac{9}{15}$ c) $13 \frac{1}{2}$ d) $16 \frac{2}{3}$

20. $6 \frac{2}{3} \div 4 =$ _____
a) $1 \frac{1}{2}$ b) $1 \frac{1}{2}$ c) $1 \frac{2}{3}$ d) $1 \frac{3}{4}$

21. $8 \frac{2}{3} \div \frac{2}{3} =$ _____
a) 8 b) 13 c) $16 \frac{2}{3}$ d) $17 \frac{1}{3}$

22. $3 \frac{3}{8} \div 2 \frac{1}{4} =$ _____
a) $1 \frac{1}{2}$ b) $1 \frac{3}{4}$ c) $2 \frac{3}{8}$ d) $6 \frac{3}{32}$

VII. Convert Fractions and Decimals

23. Change $\frac{3}{4}$ to a decimal.
a) 0.075 b) 0.75 c) 7.5 d) 75.0

24. Change $\frac{1}{2}$ to a decimal.
a) 2.0 b) 0.02 c) 0.2 d) 0.5

25. Change 0.3 to a fraction in lowest terms.
a) $\frac{3}{100}$ b) $\frac{1}{3}$ c) $\frac{3}{10}$ d) 3

26. Change 0.07 to a fraction in lowest terms.

- a) $\frac{7}{100}$ b) $\frac{7}{10}$ c) $\frac{1}{7}$ d) 7

VIII. Add and Subtract Decimals

27. $0.982 + 0.7 + 0.65 =$ _____

- a) 1.054 b) 1.117 c) 2.332 d) 9.117

28. $53.869 + 42.75 =$ _____

- a) 95.944 b) 96.619 c) 58.144 d) 95.619

29. $0.071 - 0.06 =$ _____

- a) 0.065 b) 0.067 c) 0.076 d) 0.011

30. $0.607 - 0.438 =$ _____

- a) 0.231 b) 0.169 c) 0.179 d) 0.279

IX. Multiply Decimals

31. 0.695

x .86

- a) 0.5977 b) 5.977 c) 59.77 d) 58.97

32. $0.67 \times 0.48 =$ _____

- a) 0.3226 b) 0.3216 c) 3.216 d) 32.16

33. $0.609 \times 3.80 =$ _____

- a) 2.3142 b) 0.23142 c) 2.31402 d) 0.2314

34. 5.26

x 3.5

- a) 174.1 b) 184.10 c) 17.410 d) 18.41

X. Divide Decimals

35. $25 \overline{)53.25}$

- a) 0.23 b) 0.213 c) 2.013 d) 2.13

36. $8.001 \div 0.7 =$ _____

- a) 1.143 b) 10.43 c) 11.43 d) 114.3

37. $62.5 \div 0.25 =$ _____


- a) 25 b) 250 c) 205 d) 0.25

38. $2.193 \div 0.215 =$ _____

- a) 1.20 b) 12 c) 10.2 d) 102


Using the Delta-Tee formulas to solve these problems:

(1)

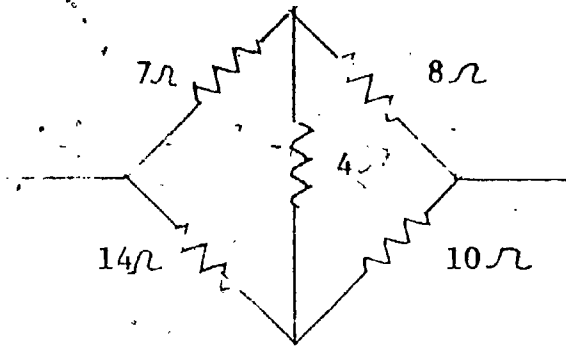


9.1Ω

(2)

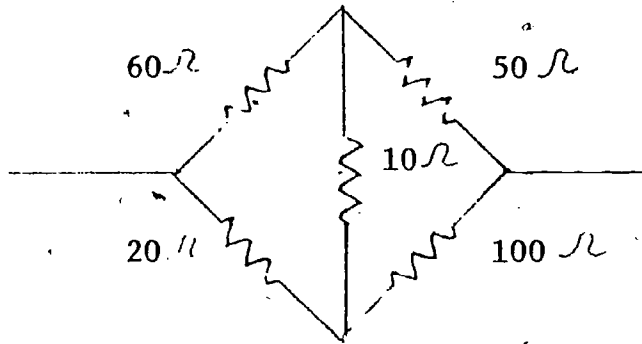


(3)

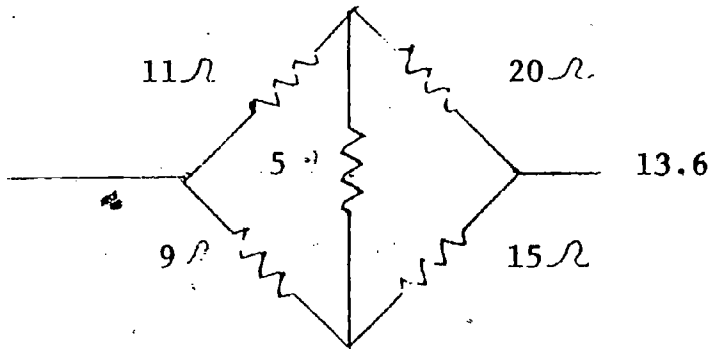


13.6

(4)

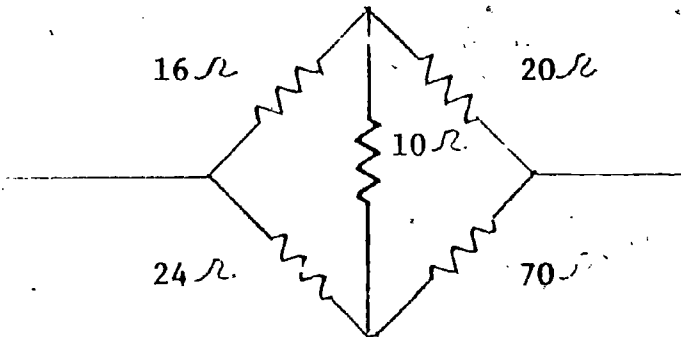


(5)

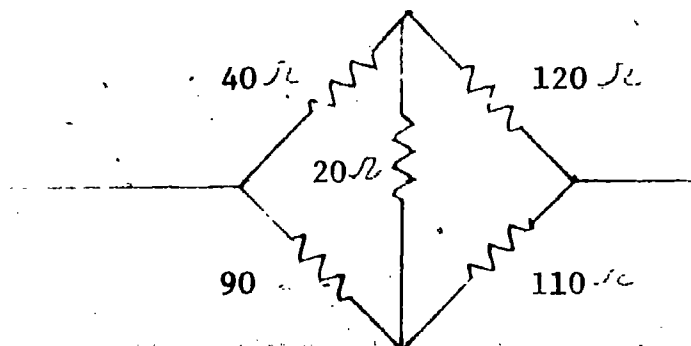


233


159

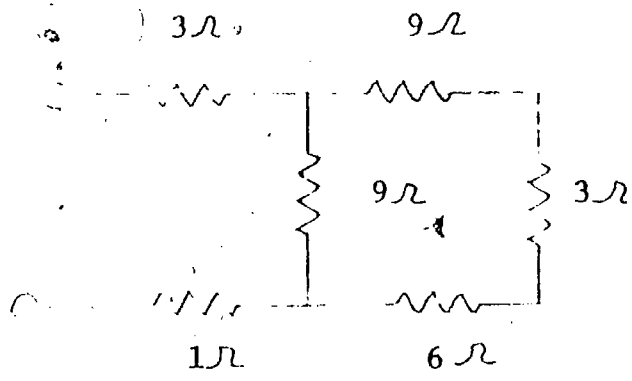

$$R_t = \underline{\hspace{2cm}}$$

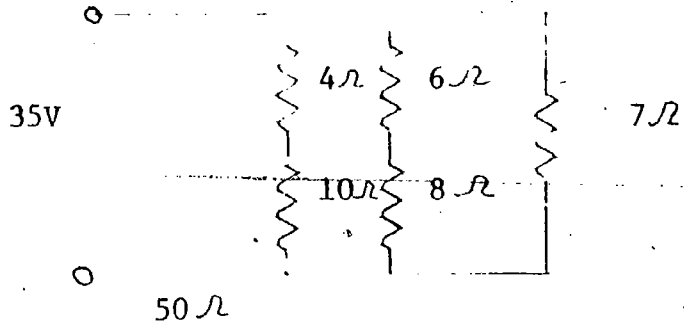


$$R_t = \underline{\hspace{2cm}}$$

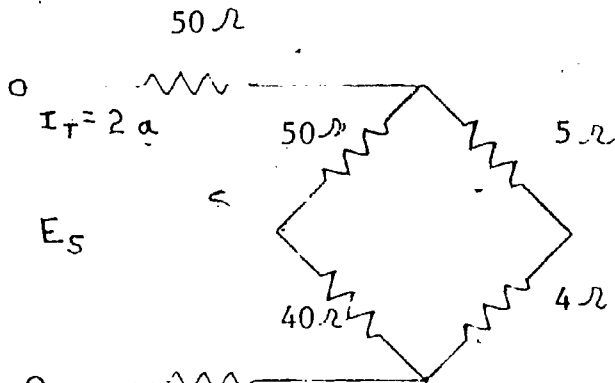


$$R_t = \underline{\hspace{2cm}}$$

$$E_s = \underline{\hspace{2cm}}$$

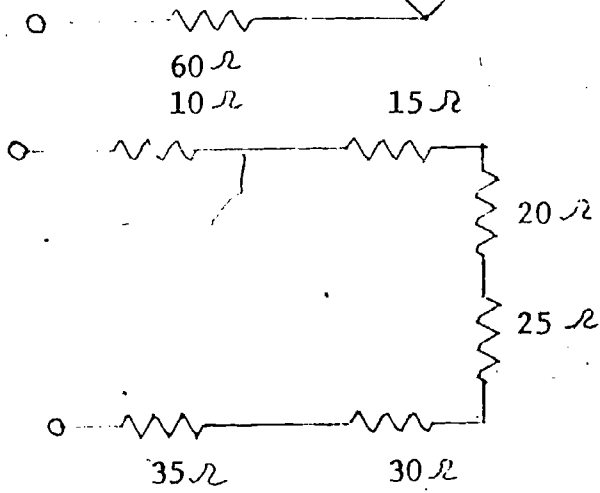

$$R_t = \underline{\hspace{2cm}}$$

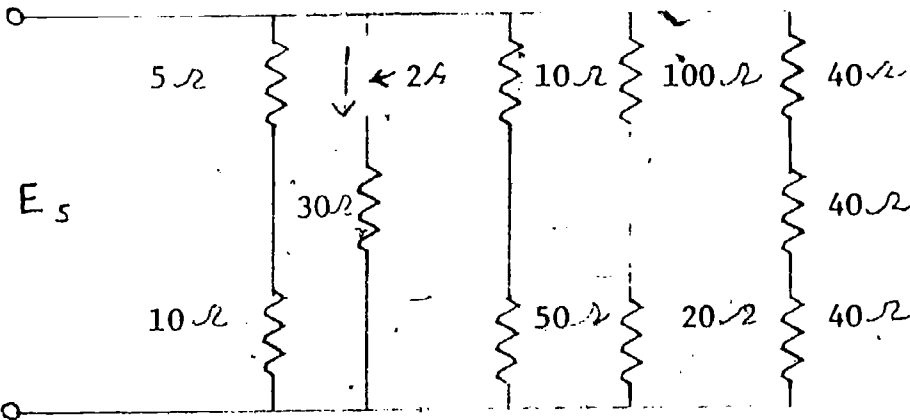

$$R_t = \underline{\hspace{2cm}}$$

$$E_s = \underline{\hspace{2cm}}$$

160

NUMERATION

Rounding Numbers

Round numbers to any specific place value through one million.

Ten Millions	Millions	Hundred Thousands	Ten Thousands	Thousands	Hundreds	Tens	Ones
10,000,000	1,000,000	100,000	10,000	1,000	100	10	1

Answer These Questions:

1. What is 4386 rounded to the nearest ten?
 - A. 4280
 - B. 4380
 - C. 4390
 - D. 4400

2. What is 643,849 rounded to the nearest thousand?
 - A. 643,850
 - B. 643,800
 - C. 644,000
 - D. 640,000

3. What is 9,675,000 rounded to the nearest hundred thousand?
 - A. 9,670,000
 - B. 9,675,000
 - C. 9,680,000
 - D. 9,700,000

WHOLE NUMBER OPERATIONS

Add and subtract integers.

Solve These Problems:

4.
$$\begin{array}{r} 4326 \\ 9857 \\ 2015 \\ +5634 \\ \hline \end{array}$$

- A. 22,833
- B. 21,832
- C. 21,742
- D. 21,732

5. $3804 + 527 + 96 + 12,485 =$ _____

- A. 16,912
- B. 15,902
- C. 15,911
- D. 124,912

6.
$$\begin{array}{r} 512,705 \\ -49,638 \\ \hline \end{array}$$

- A. 463,169
- B. 473,177
- C. 463,067
- D. 463,077

Multiply and divide integers.

Solve These Problems:

7.
$$\begin{array}{r} 836 \\ \times 79 \\ \hline \end{array}$$

- A. 56,044
- B. 65,044
- C. 66,046
- D. 66,044

8. $987 \times 456 =$ _____

- A. 440,172
- B. 450,972
- C. 450,182
- D. 451,072

9. $6300 \div 97 =$ _____

- A. $64 \frac{92}{97}$
- B. $65 \frac{95}{97}$
- C. $65 \frac{85}{97}$
- D. 66

10. $1498 \div 49 =$ _____

- A. $3 \frac{28}{49}$
- B. 31
- C. $32 \frac{30}{49}$
- D. $30 \frac{4}{7}$

FRACTIONS AND OPERATIONS

Add and subtract fractions.

Add mixed numbers with unlike denominators.

Subtract mixed numbers with like denominators. (regrouping)

Subtract mixed numbers with unlike denominators. (no regrouping)

Solve These Problems:

11. $7 \frac{5}{6}$
 $+ 2 \frac{3}{6}$

- A. $9 \frac{2}{6}$
- B. $10 \frac{1}{3}$
- C. $10 \frac{1}{2}$
- D. $10 \frac{8}{6}$

12. $5 \frac{1}{2} + 2 \frac{5}{8} =$ _____

- A. $8 \frac{1}{8}$
- B. $7 \frac{6}{10}$
- C. $8 \frac{9}{8}$
- D. $7 \frac{6}{16}$

13.
$$\begin{array}{r} 17 \frac{3}{8} \\ -12 \frac{7}{8} \\ \hline \end{array}$$

- A. $4 \frac{6}{8}$
- B. $5 \frac{3}{4}$
- C. $4 \frac{1}{2}$
- D. $5 \frac{1}{2}$

14. $9 \frac{2}{3} - 5 \frac{1}{4} =$ _____

- A. $4 \frac{1}{4}$
- B. $4 \frac{11}{12}$
- C. $3 \frac{5}{12}$
- D. $4 \frac{5}{12}$

Multiply fractions.

Multiply a mixed number by a proper fraction.

Multiply a whole number by a mixed number.

Multiply two mixed numbers.

Solve These Problems:

15. $\frac{5}{6} \times 426 =$ _____

- A. 71
- B. 210
- C. 355
- D. 356

16. $3 \frac{3}{5} \times \frac{8}{9} =$ _____

- A. $\frac{24}{15}$
- B. $3 \frac{24}{45}$
- C. 3
- D. $3 \frac{1}{5}$

17. $12 \times 8 \frac{3}{4} =$ _____

- A. $96 \frac{3}{4}$
- B. 105
- C. 72
- D. 100

18. $8 \frac{2}{5} \times 6 \frac{2}{3} =$ _____

- A. 56
- B. $48 \frac{4}{15}$
- C. $48 \frac{4}{8}$
- D. 46

Divide Fractions.

Divide a whole number by a proper fraction.

Divide a mixed number by a proper fraction.

Divide a mixed number by a mixed number.

Solve These Problems:

19. $15 \div 9/10 =$ _____

- A. $9 \frac{10}{15}$
- B. $10 \frac{9}{15}$
- C. $13 \frac{1}{2}$
- D. $16 \frac{2}{3}$

20. $6 \frac{2}{3} \div 4 =$ _____

- A. $1 \frac{1}{12}$
- B. $1 \frac{1}{2}$
- C. $1 \frac{2}{3}$
- D. $1 \frac{3}{4}$

21. $8 \frac{2}{3} \div 2/3 =$ _____

- A. 8
- B. 13
- C. $16 \frac{2}{3}$
- D. $17 \frac{1}{3}$

22. $3 \frac{3}{8} \div 2 \frac{1}{4} =$ _____

- A. $1 \frac{1}{2}$
- B. $1 \frac{3}{4}$
- C. $2 \frac{3}{8}$
- D. $6 \frac{3}{32}$

DECIMALS AND DECIMAL OPERATIONS

Convert fractions and decimals.

Change a common fraction to an equivalent decimal fraction.

Change a decimal fraction to an equivalent common fraction.

Solve These Problems:

23. Change $\frac{3}{4}$ to a decimal.

- A. 0.075
- B. 0.75
- C. 7.5
- D. 75.0

24. Change $\frac{1}{2}$ to a decimal.

- A. 2.
- B. 0.02
- C. 0.2
- D. 0.5

25. Change 0.3 to a fraction in lowest terms.

- A. $\frac{3}{100}$
- B. $\frac{1}{3}$
- C. $\frac{3}{10}$
- D. 3

26. Change 0.07 to a fraction in lowest terms.

- A. $\frac{7}{100}$
- B. $\frac{7}{10}$
- C. $\frac{1}{7}$
- D. 7

Add and subtract decimals.

Add decimals through thousandths.

Subtract decimals through thousandths.

Solve These Problems

27. $0.982 + 0.7 + 0.65 =$ _____

- A. 1.054
- B. 1.117
- C. 2.332
- D. 9.117

28. $53.869 + 42.75 =$ _____

- A. 95.944
- B. 96.619
- C. 58.144
- D. 95.619

29. $0.071 - 0.06 =$ _____

- A. 0.065
- B. 0.067
- C. 0.076
- D. 0.011

30. $0.607 - 0.438 =$ _____

- A. 0.231
- B. 0.169
- C. 0.179
- D. 0.279

Multiply decimals.

Multiply a whole number (limit: 3 digits) by a decimal (limit: thousandths).

Multiply a decimal by a decimal. (limit: thousandths).

Solve These Problems:

31.
$$\begin{array}{r} 0.695 \\ \times 86 \\ \hline \end{array}$$

- A. 0.5977
- B. 5.977
- C. 59.77
- D. 58.97

32. $0.67 \times 0.48 =$ _____

- A. 0.3226
- B. 0.3216
- C. 3.216
- D. 32.16

33. $0.609 \times 3.80 =$ _____

- A. 2.3142
- B. 0.23142
- C. 2.31402
- D. 0.2314

34.
$$\begin{array}{r} 5.26 \\ \times 3.5 \\ \hline \end{array}$$

- A. 174.1
- B. 184.10
- C. 17.410
- D. 18.41

Divide decimals.

Divide decimals. (limit: 5-digit dividends, 3-digit divisors).

Solve These Problems:

35. $25 \overline{) 53.25}$

- A. 0.23
- B. 0.213
- C. 2.013
- D. 2.13

36. $8.001 - 0.7 =$ _____

- A. 1.143
- B. 10.43
- C. 11.43
- D. 114.3

37. $62.5 - 0.25 =$ _____

- A. 25
- B. 250
- C. 205
- D. 0.25

38. $2.193 - 0.215 =$ _____

- A. 1.20
- B. 12
- C. 10.2
- D. 102

243

APPENDIX 6

FORMULAS AND CONVERSIONS

244

170

FORMULAS AND CONVERSION

Amplitude Conversion

$$E_{p-p} = 2E_p \quad E_p = \frac{E_{p-p}}{2}$$

$$E_p = 1.414 E_{RMS} \quad E_{RMS} = 0.707 E_p$$

$$E_p = 1.57 E_{AVE} \quad E_{AVE} = 0.637 E_p$$

$$E_{RMS} = 1.11 E_{AVE} \quad E_{AVE} = 0.9 E_{RMS}$$

These formulas may be used for current by substituting I for E.

Bandwidth

$$BW = \frac{fr}{Q}$$

Capacitance

$$C = Q/V$$

$$\text{In series } C_T = \frac{1}{\frac{1}{C_1} + \frac{1}{C_2} + \frac{1}{C_3}}$$

$$\text{In parallel } C_T = C_1 + C_2 + C_3 + \dots$$

Capacitive Reactance

$$X_C = \frac{1}{2\pi fc}$$

$$\text{In series } X_{CT} = X_{C1} + X_{C2} + X_{C3} + \dots$$

$$\text{In parallel } X_{CT} = \frac{1}{\frac{1}{X_{C1}} + \frac{1}{X_{C2}} + \frac{1}{X_{C3}} + \dots}$$

Conductance

$$G = \frac{1}{R}$$

Current

$$I = \frac{Q}{T}$$

$$\text{In impedance circuits } I = \frac{E_T}{Z} \quad I = \sqrt{I_R^2 + (I_C - I_L)^2}$$

Frequency-Period Conversions

$$T = \frac{1}{f} \quad f = \frac{1}{T}$$

Impedance

$$Z = \frac{E_T}{I_T}$$

$$\text{Series circuit } Z = \sqrt{R^2 + (X_L - X_C)^2} \quad Z = \sqrt{R^2 + X_C^2}$$

$$Z = \sqrt{R^2 + X_L^2}$$

$$\text{Parallel circuit } Z = \frac{R X_L}{\sqrt{R^2 + X_L^2}} \quad Z = \frac{R X_C}{\sqrt{R^2 + X_C^2}}$$

$$Z = \frac{R X_L X_C}{\sqrt{(R X_L - R X_C)^2 + (X_L^2 X_C^2)}}$$

Inductance: Induced voltage $E = L \left(\frac{\Delta i}{\Delta T} \right)$

Quality $Q = \frac{X_L}{R}$

In series $L_T = L_1 + L_2 + L_3 \dots$

In parallel $L_T = \frac{1}{\frac{1}{L_1} + \frac{1}{L_2} + \frac{1}{L_3} \dots}$

Inductive Reactance: $X_L = 2 \pi f L$

In series $X_{LT} = X_{L1} + X_{L2} + X_{L3} \dots$

In parallel $\frac{1}{X_{LT}} = \frac{1}{X_{L1}} + \frac{1}{X_{L2}} + \frac{1}{X_{L3}} \dots$

Ohms Law

$$E = IR \quad I = \frac{E}{R} \quad R = \frac{E}{I}$$

Parallel Circuits

$$P_T = P_{R1} + P_{R2} + P_{R3} \dots$$

$$E_T = E_{R1} = E_{R2} = E_{R3} \dots$$

$$R_T = \frac{1}{\frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3} \dots}$$

$$I_T = I_{R1} + I_{R2} + I_{R3} \dots$$

Power

$$P = IE \text{ (direct current)}$$

$$P = I^2 R \quad P = \frac{E^2}{R}$$

$$P = \frac{W}{T}$$

$$P_{app} = IE \text{ (Alternating Current)}$$

$$P = IE \cos \theta$$

Power Factor

$$PF = \cos \theta$$

$$PF = \frac{P}{P_{app}}$$

Quality (figure of merit)

$$Q = \frac{X}{R}$$

Resistance

$$R = \frac{\text{resistivity} \cdot \text{length}}{\text{area}}$$

Resonant Frequency

$$f_r = \frac{1}{2\pi\sqrt{LC}}$$

Series Circuit

$$P_T = P_1 + P_2 + P_3 \dots$$

$$R_T = R_1 + R_2 + R_3 \dots$$

$$E_T = E_{R1} + E_{R2} + E_{R3} \dots$$

$$I_T = I_1 = I_2 = I_3 \dots$$

Time Constant

$$T = RC$$

$$T = \frac{L}{R}$$

Transformers

$$\frac{N_{pri}}{N_{sec}} = \frac{E_{pri}}{E_{sec}} = \frac{I_{sec}}{I_{pri}}$$

$$\left(\frac{N_{pri}}{N_{sec}}\right)^2 = \frac{Z_{pri}}{Z_{sec}}$$

AC Voltage

$$E = \frac{W}{Q}$$

$$E_T = I_T Z$$


Series circuit

$$E = \sqrt{E_R^2 + E_C^2}$$

$$E = \sqrt{E_R^2 + E_L^2}$$

$$E = \sqrt{E_R^2 + (E_L - E_C)^2}$$

**OHM'S LAW
IN THE
MAGIC TRIANGLE**

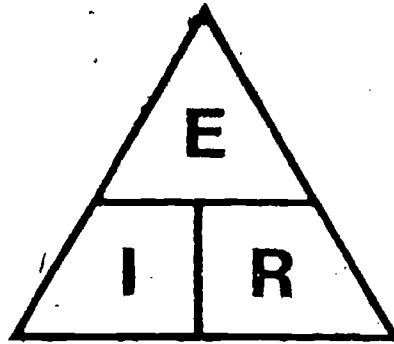

**E = volts
I = amps
R = ohms**


Three Formulas
from
Ohm's Law

A. $E = \begin{array}{|c|c|} \hline & \\ \hline I & R \\ \hline \end{array}$ or $E = I \times R$
or Volts = Amps x Ohms

B. $I = \begin{array}{|c|} \hline E \\ \hline R \\ \hline \end{array}$ or $I = E/R$
or Amps = Volts ÷ Ohms


C. $R = \begin{array}{|c|} \hline E \\ \hline I \\ \hline \end{array}$ or $R = E/I$
or Ohms = Volts ÷ Amps


OHM'S LAW FOR POWER
IN THE
MAGIC TRIANGLE

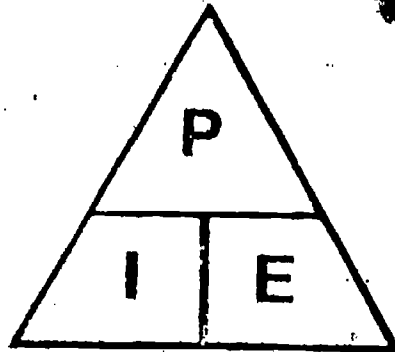


P = Watts
I = Amps
E = Volts

THREE FORMULAS
FROM
OHM'S LAW FOR POWER

A. $P =$  or $P = I \times E$
or Watts = Amps x Volts

B. $I =$  or $I = P/E$
or Amps = Watts ÷ Volts

C. $E =$  or $E = P/I$
or Volts = Watts ÷ Amps

250

APPENDIX 7

OHM'S LAW AND POWER LAW WORKSHEETS

OHMS LAW
WORKSHEET I

Given two of the circuit parameters find the third.

Formula: $E = I \times R$

1. $E=10V$ $I=0.015$
2. $E=50V$ $R=5000 \Omega$
3. $I=1.5A$ $R=1.5K \Omega$
4. $I=10A$ $E=50V$
5. $E=6V$ $R=50 \Omega$
6. $E=120$ $I=14A$
7. $R=100K \Omega$ $I=5mA$
8. $R=2.2M \Omega$ $E=22KV$
9. $I=5.5A$ $E=11KV$
10. $R=47K \Omega$ $I=10mA$
11. $I=16.6A$ $R=.6 \Omega$
12. $E=440$ $I=3A$
13. $E=37KV$ $R=740K \Omega$
14. $E=96V$ $I=400mA$
15. $I=75mA$ $R=47K \Omega$
16. $R=100 \Omega$ $I=5A$
17. $R=390 \Omega$ $E=26V$
18. $I=.003A$ $E=54V$
19. $I=45\mu A$ $R=20M \Omega$
20. $E=167V$ $I=16.7A$

POWER LAW WORKSHEET

Solve the following problems using the power law formulas.

- | | | | |
|-----|---------|----------------|--|
| 1. | E=120V | I=3A | |
| 2. | E=45V | I=4A | |
| 3. | I=5A | E=1.6KV | |
| 4. | E=34V | I=50mA | |
| 5. | E=60V | I=35A | |
| 6. | E=100V | R=500 Ω | |
| 7. | E=120V | R=47K Ω | |
| 8. | E=120V | R=47 Ω | |
| 9. | E=1200V | R=2 Ω | |
| 10. | I=2A | R=8 Ω | |
| 11. | I=16A | R=2 Ω | |
| 12. | I=35mA | R=39K Ω | |
| 13. | I=10 | R=480 Ω | |
| 14. | I=35ma | R=12M Ω | |
| 15. | I=14ma | E=45kV | |

For the following problems solve for the indicated quantity.

- | | | | |
|-----|----------------|--------------|----------|
| 16. | I=6A | P=360W | E= _____ |
| 17. | E=115V | P=3450W | I= _____ |
| 18. | R=35K Ω | E=50V | I= _____ |
| 19. | E=64V | P=320W | I= _____ |
| 20. | R=34M Ω | I=5uA | E= _____ |
| 21. | E=120V | I=300mA | P= _____ |
| 22. | P=350W | E=120V | I= _____ |
| 23. | I=5A | E=120V | R= _____ |
| 24. | P=1250W | I=10A | E= _____ |
| 25. | P=64W | R=4 Ω | I= _____ |

253

Name _____

Date _____

Ohm's Law


1. $I=10A$ $R=27\ \Omega$ $E=$ _____

2. $E=110V$ $I=.02A$ $R=$ _____

3. $E=20V$ $I=5A$ $P=$ _____


4. $E=110V$ $R=2000\ \Omega$ $I=$ _____

5. $P=120W$ $I=2A$ $E=$ _____

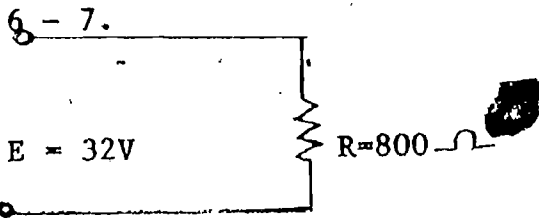


$I = +$ _____

$P =$ _____

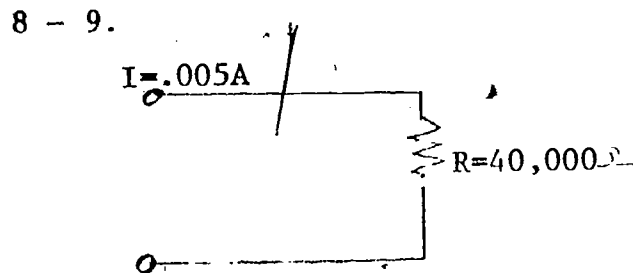

$E =$ _____

$P =$ _____

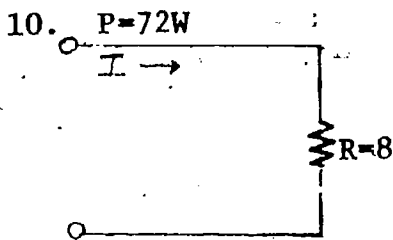


$I =$ _____

APPENDIX 8
IDENTIFICATION OF TOOLS

181255

Tools and Equipment

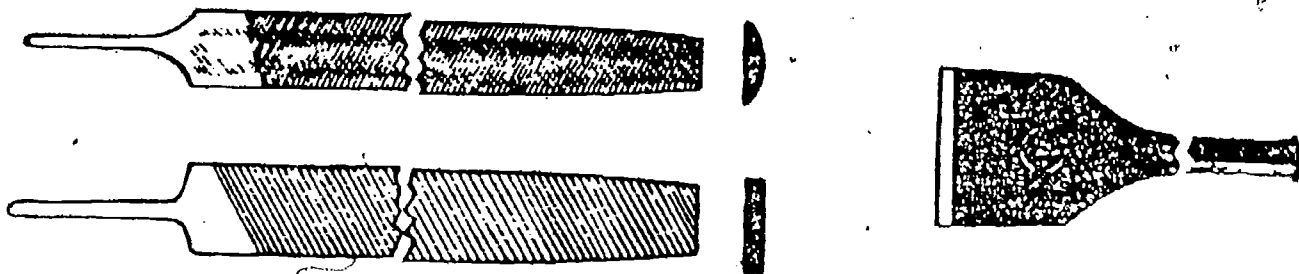


FILE (SINGLE & DOUBLE CUT)

CHISEL




POWER AUGER

REAMER

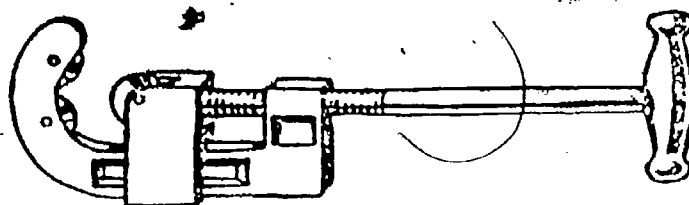


PIPE CUTTER


ADJUSTABLE WRENCH

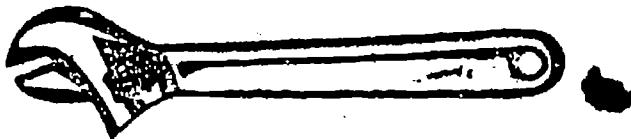

ELECTRICIAN HAMMER

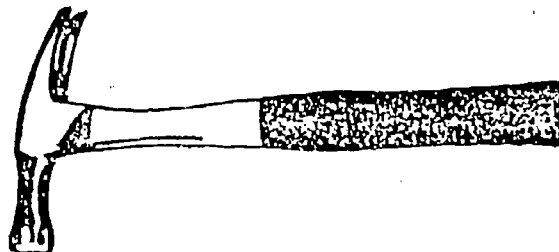

STUBBY SCREWDRIVER




PHILIPS SCREWDRIVER




LINEMAN PLIERS




GROOVE JOINT PLIERS

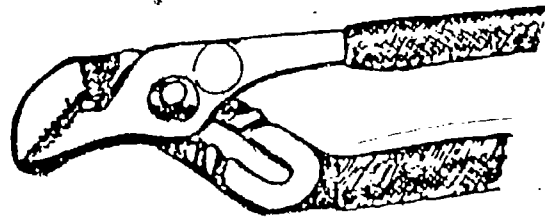


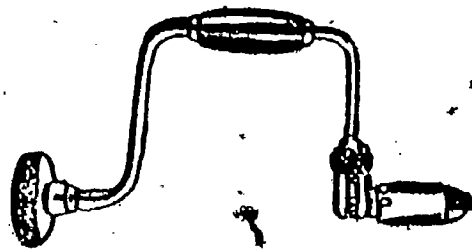


BRACE

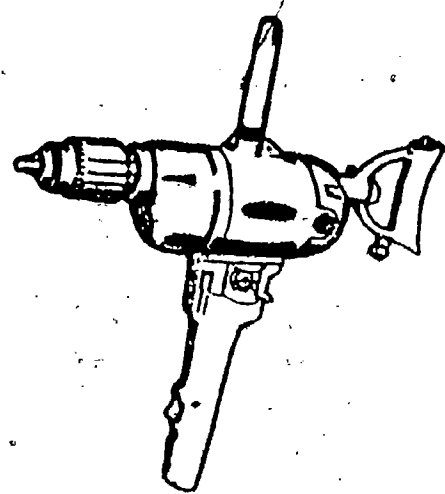


DRILL MOTOR

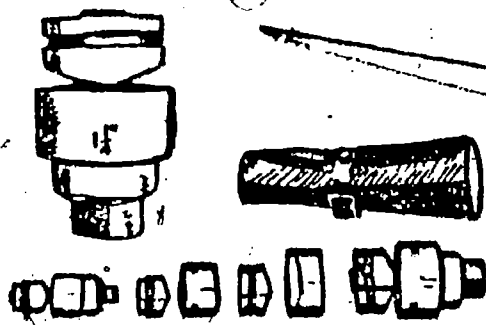


KNOCK OUT PUNCHES

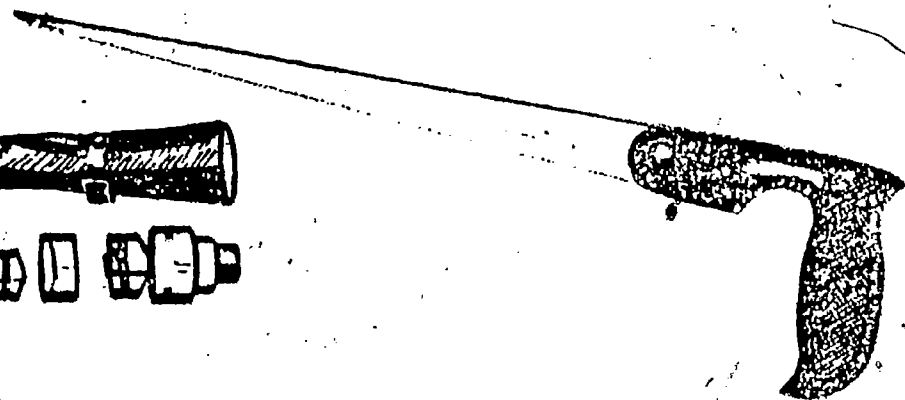


KEY HOLE SAW




FISH TAPE

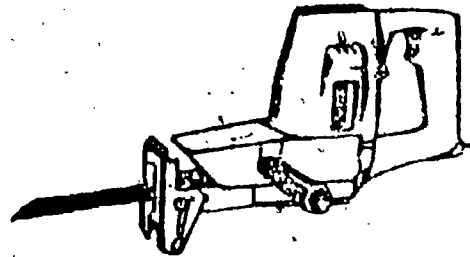


RECIPROCAL SAW

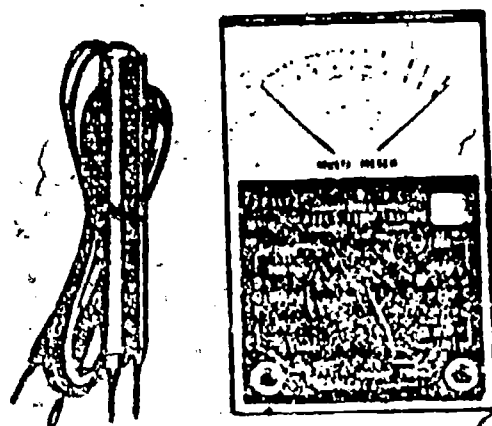

VOLG-OHMMETER




CLAMP AMMETER

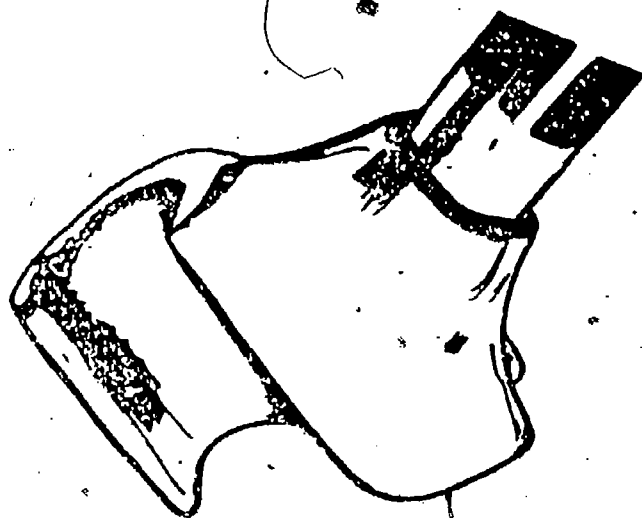


HICKEY



LEVER (TORPEDO)




PLUMB BOB




CONDUIT BENDER

NEON TESTER LIGHT




POCKET KNIFE

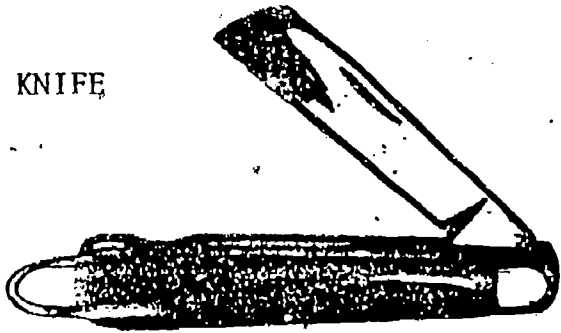


AWL




TOOL POUCH




DIAGONAL PLIERS

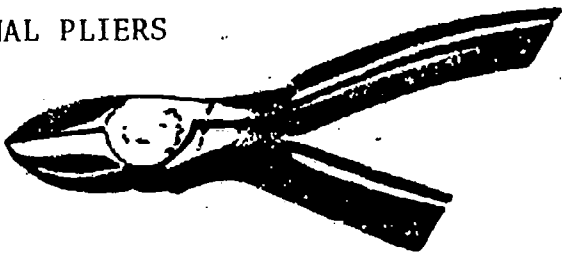

MULTI-PURPOSE TOOL

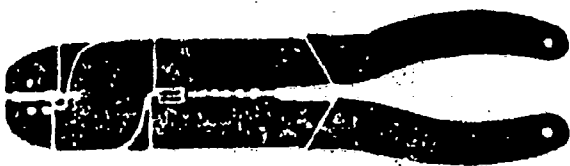

ADJUSTABLE WIRE STRIPPER

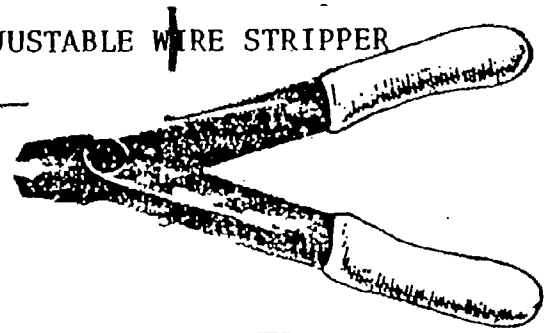


PHILIPS SCREWDRIVER



FOLDING RULE



LONG NOSE PLIERS

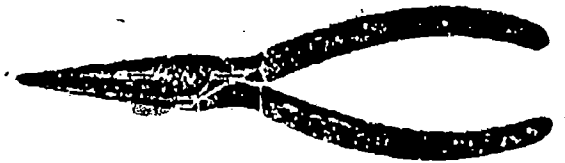


TAPPLING TOOL



259


TAP TOOL

RETAPPING DAMAGED THREADS

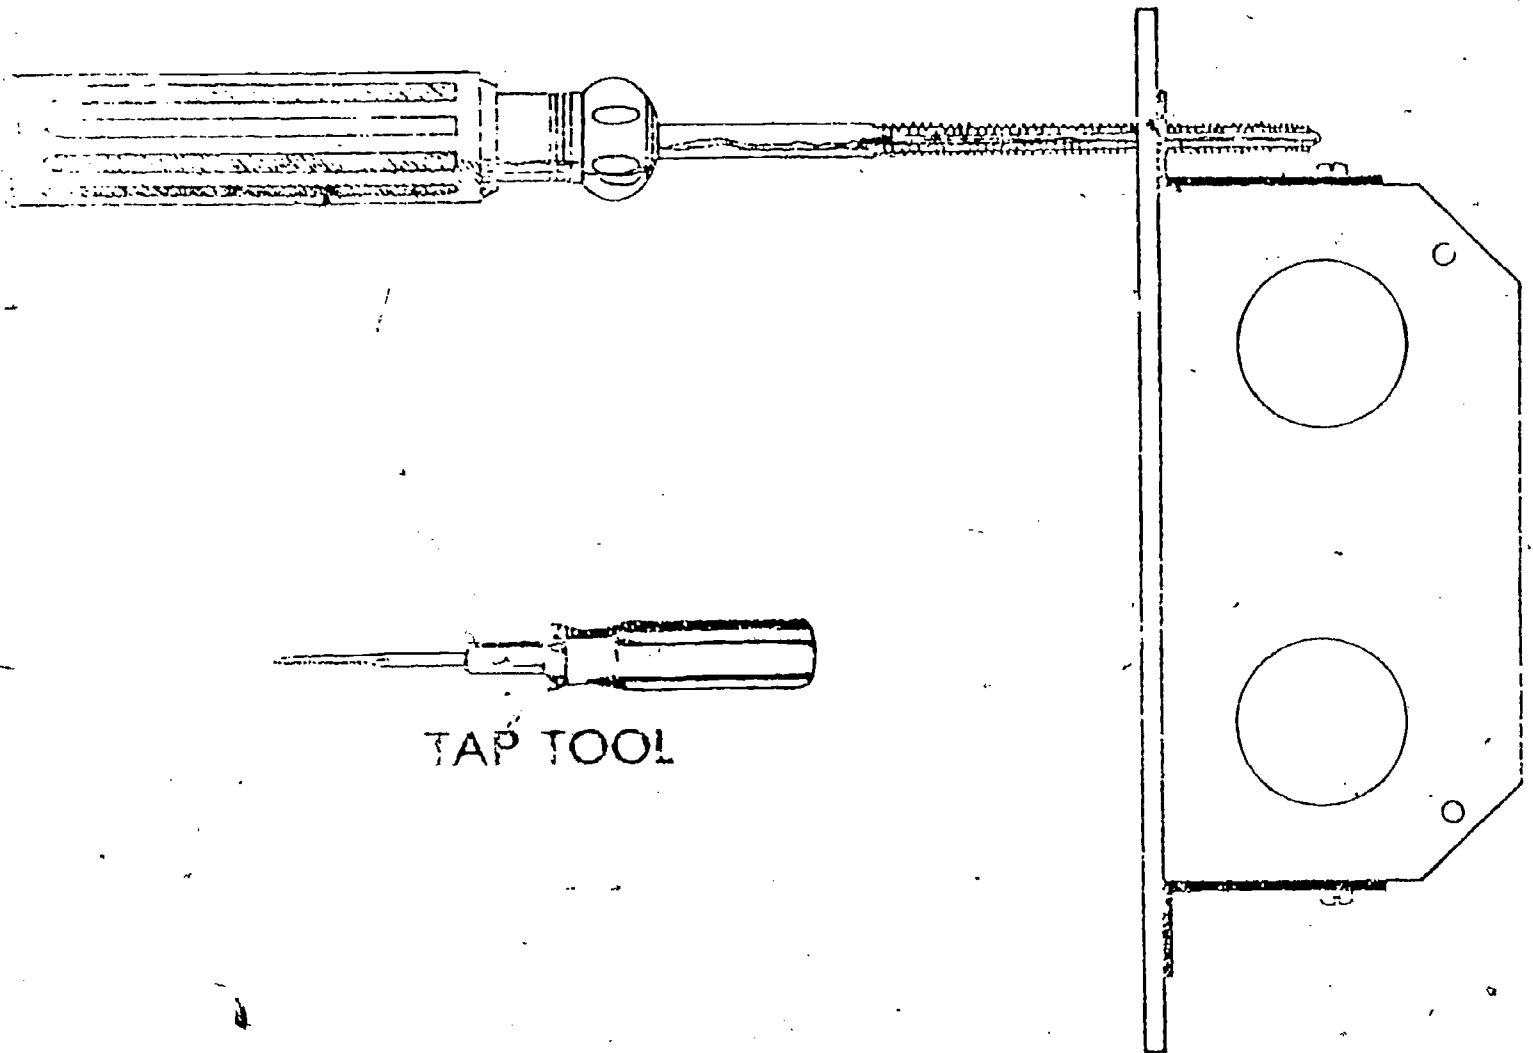


TAP TOOL


1860



STUBBY SCREWDRIVERS

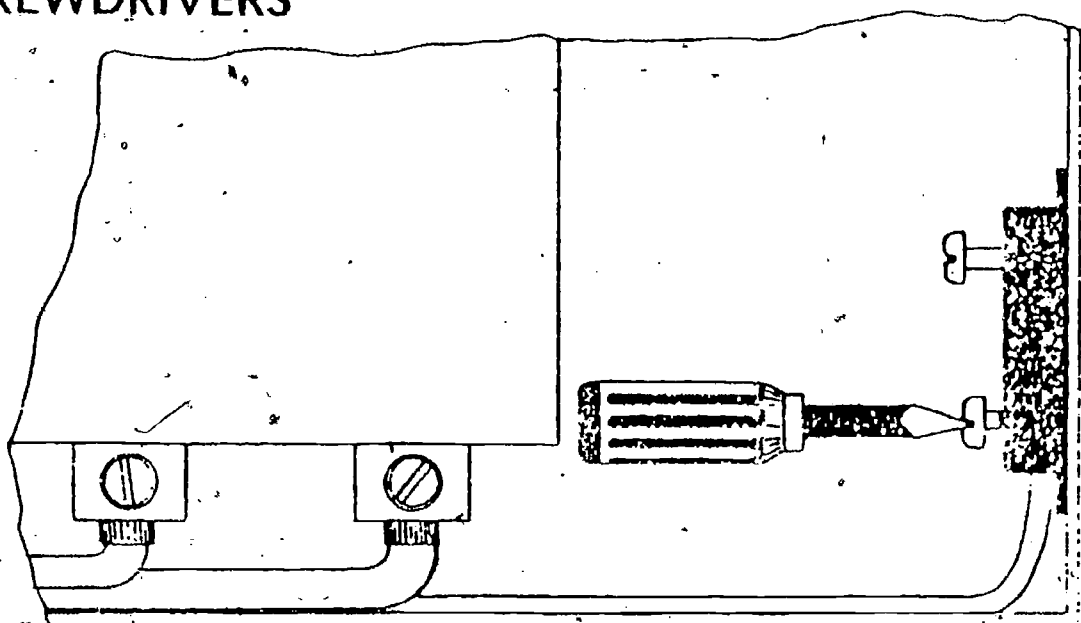

STUBBY SCREWDRIVER TIGHTENING A LUG IN LIMITED WORKING SPACE

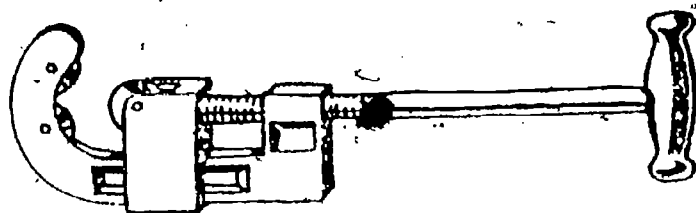

PIPE CUTTER


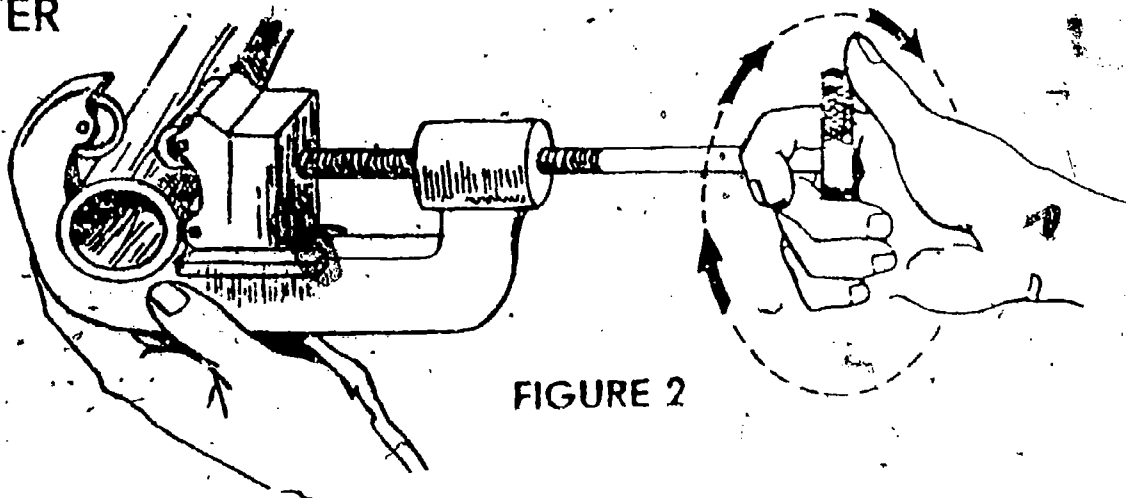


FIGURE 2

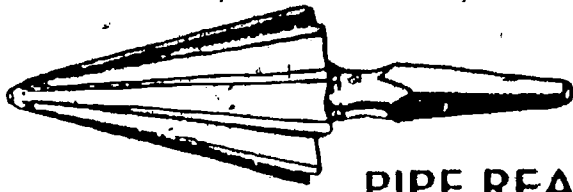

PIPE REAMER



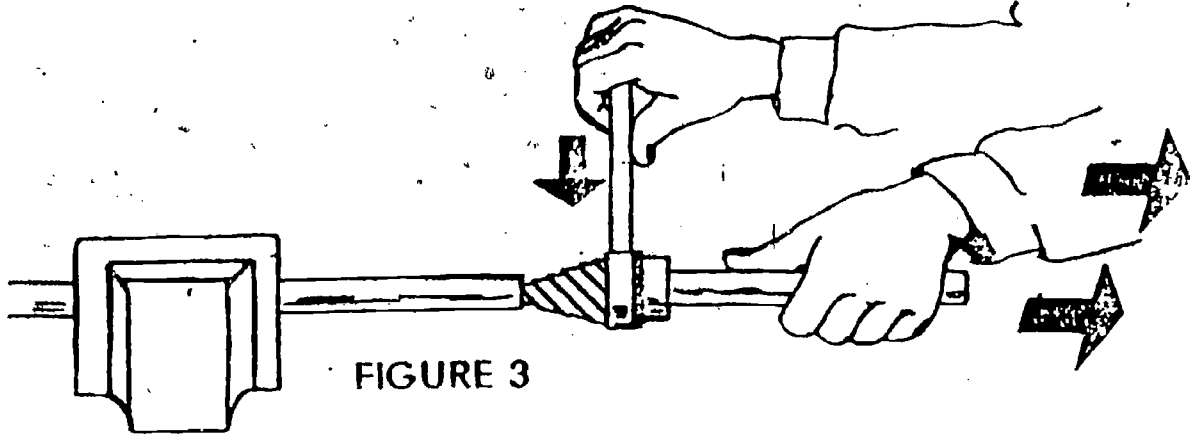


FIGURE 3

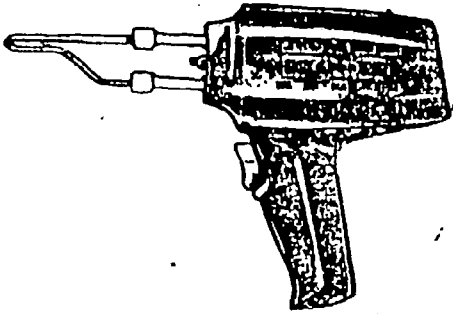

SOLDERING GUN

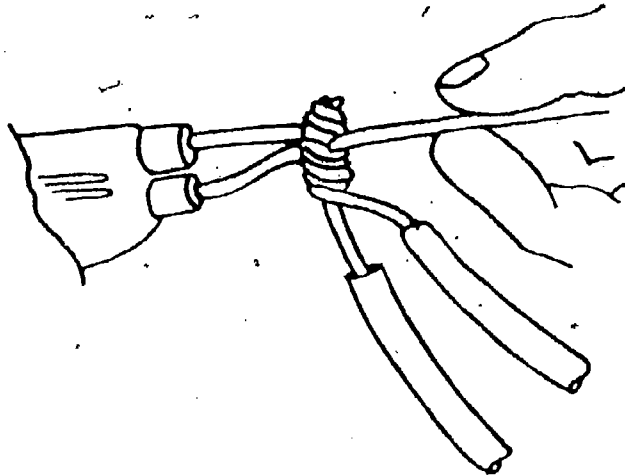

SOLDERING TWO WIRES TOGETHER


APPENDIX 9
GRADUATIONS OF A RULE

263


189

Graduations on a Rule

Halves

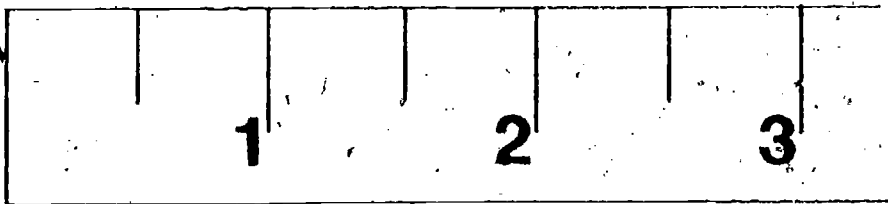


Quarters

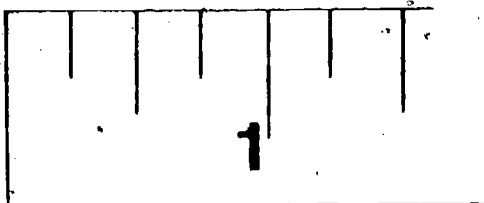


Eighths



Sixteenths

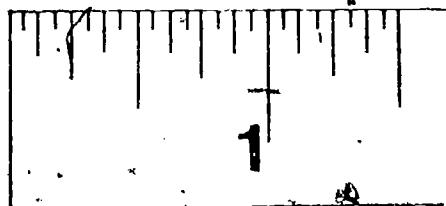


Thirty-seconds

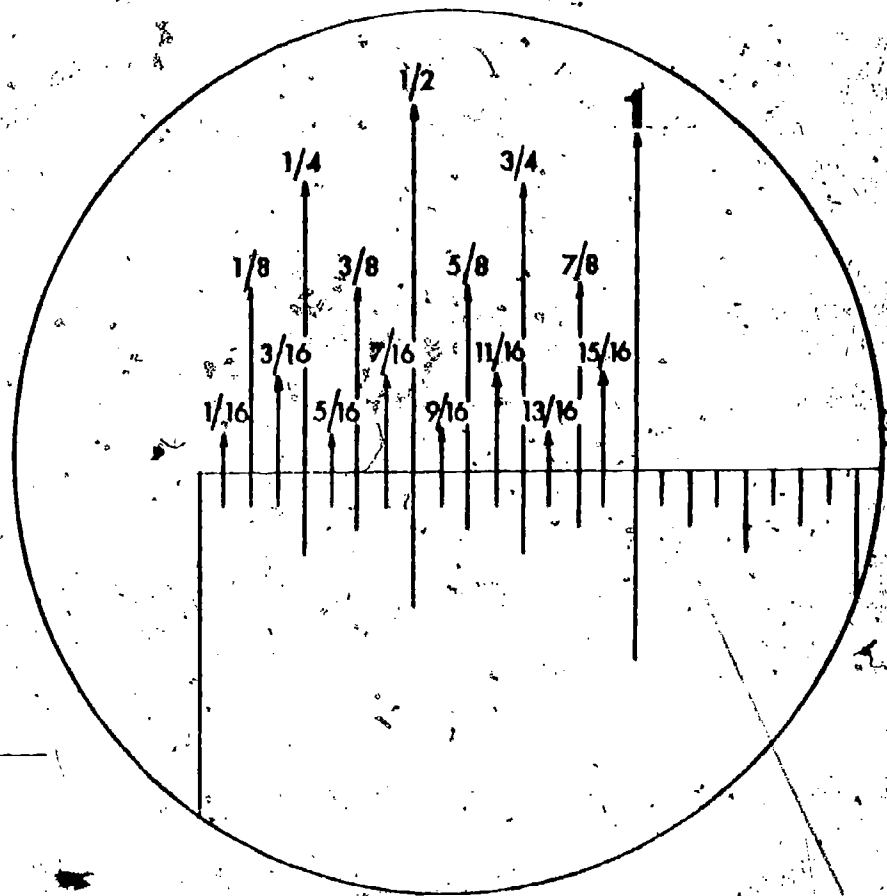


Graduations Applied to a Rule

READING THE EIGHTHS RULE

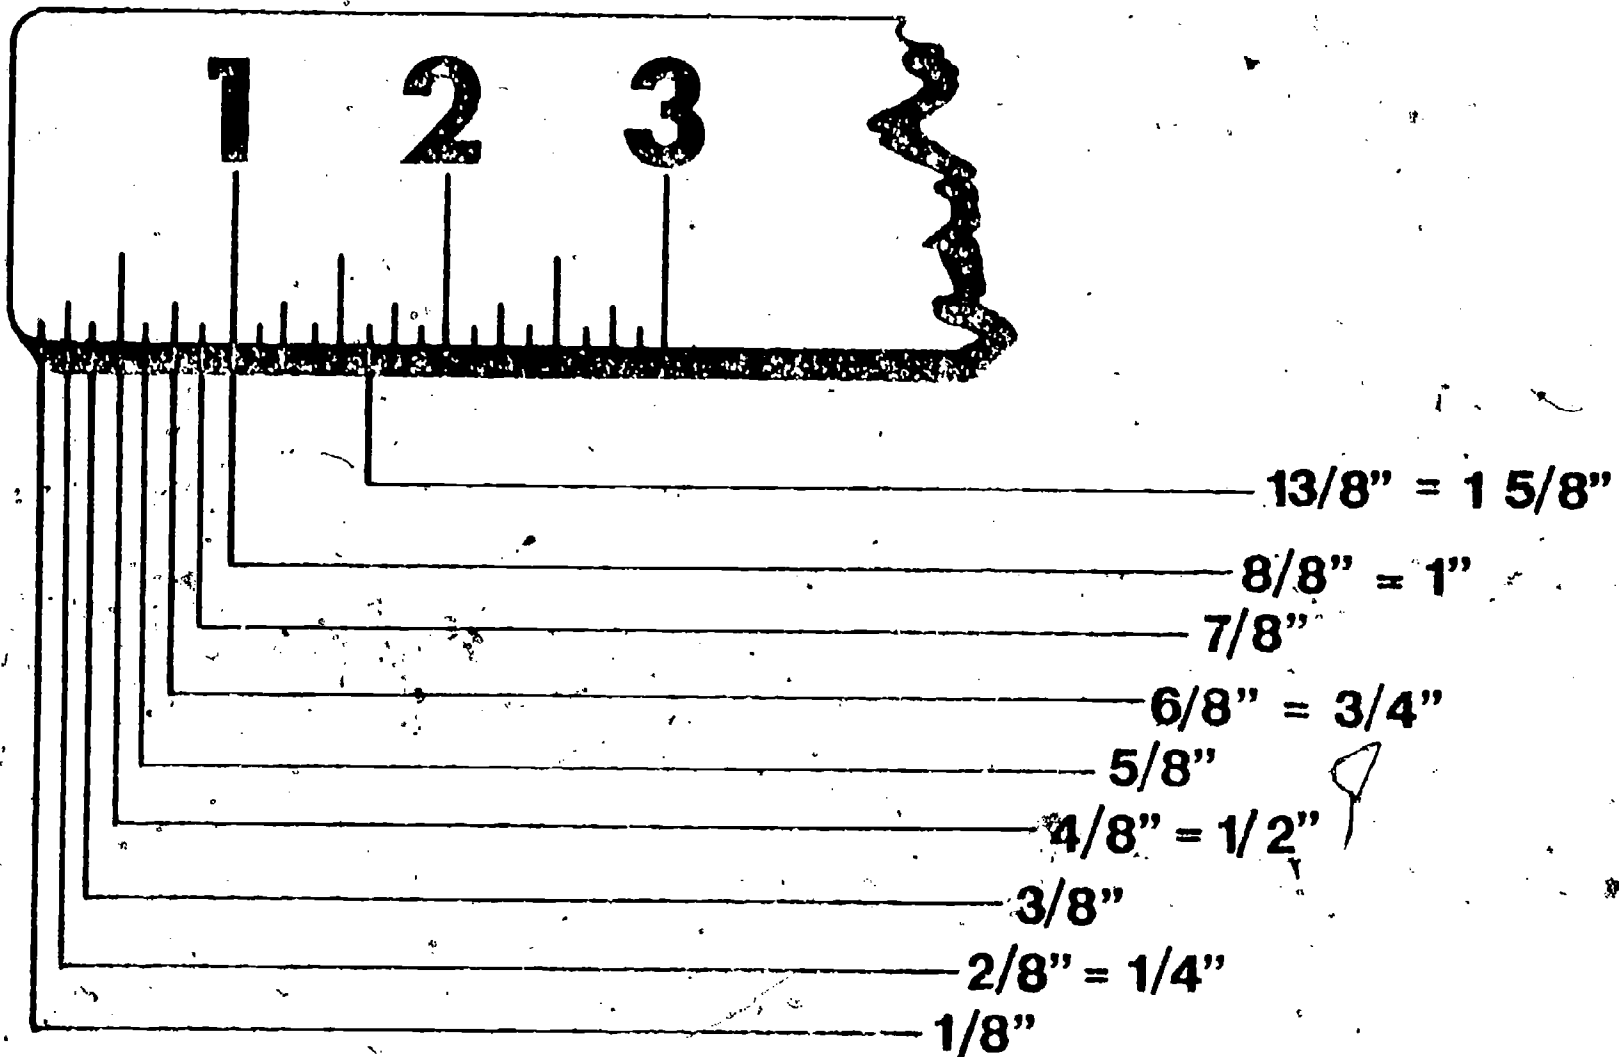

READING THE SIXTEENTHS RULE

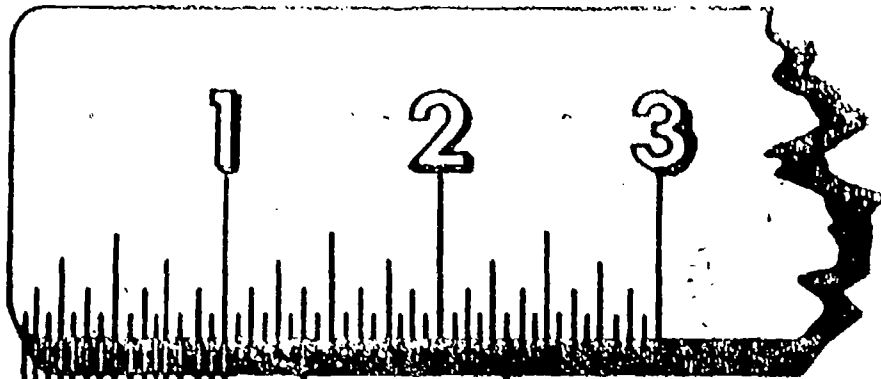

$37/16'' = 2 \ 5/16''$

$22/16'' = 1 \ 6/16''$

$16/16'' = 1''$

$15/16''$

$14/16'' = 7/8''$

$13/16''$

$12/16'' = 3/4''$

$11/16''$

$10/16'' = 5/8''$

$9/16''$

$8/16'' = 1/2''$

$7/16''$

$6/16'' = 3/8''$


$5/16''$

$4/16'' = 1/4''$

$3/16''$


Study Question:

1. Use the drawing below and read the rule to the nearest one-fourth inch.

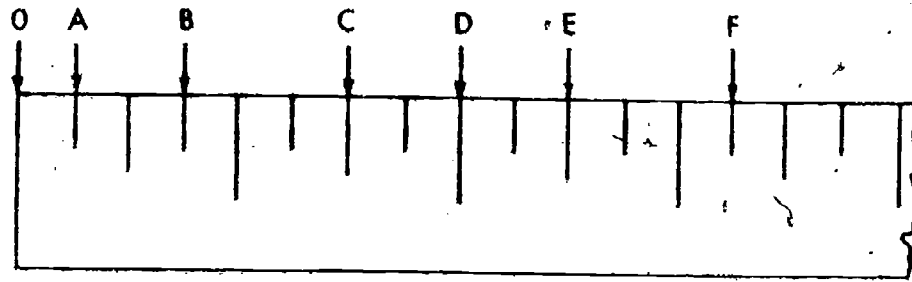

- | | |
|--------------|--------------|
| A. 0-A _____ | D. 0-D _____ |
| B. 0-B _____ | E. 0-E _____ |
| C. 0-C _____ | F. 0-F _____ |


2. Use the drawing below and read the rule to the nearest one-eighth inch.

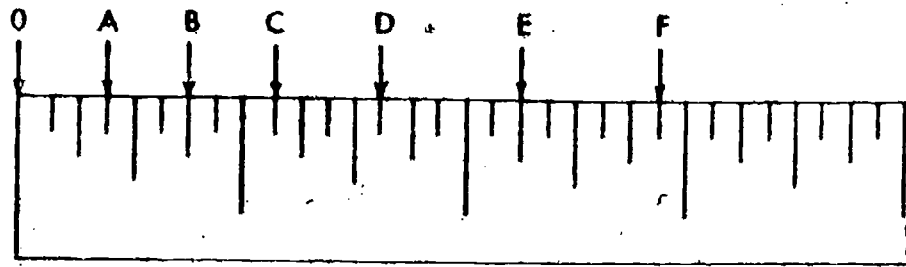

- | | |
|--------------|--------------|
| A. 0-A _____ | D. 0-D _____ |
| B. 0-B _____ | E. 0-E _____ |
| C. 0-C _____ | F. 0-F _____ |

Study Questions: continued


3. Use the drawing below and read the rule to the nearest one-sixteenth inch.

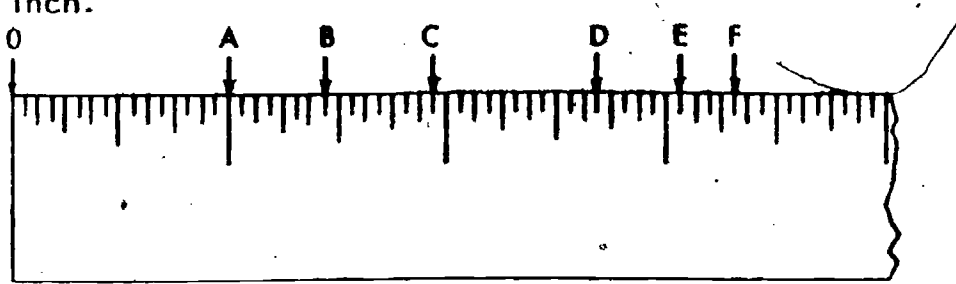

- | | |
|--------------|--------------|
| A. 0-A _____ | D. 0-D _____ |
| B. 0-B _____ | E. 0-E _____ |
| C. 0-C _____ | F. 0-F _____ |

Using a rule with one-sixteenth inch graduations, measure the following objects. Convert each of the measurements to the actual size of the object. (Have instructor explain scale.)

- 4.

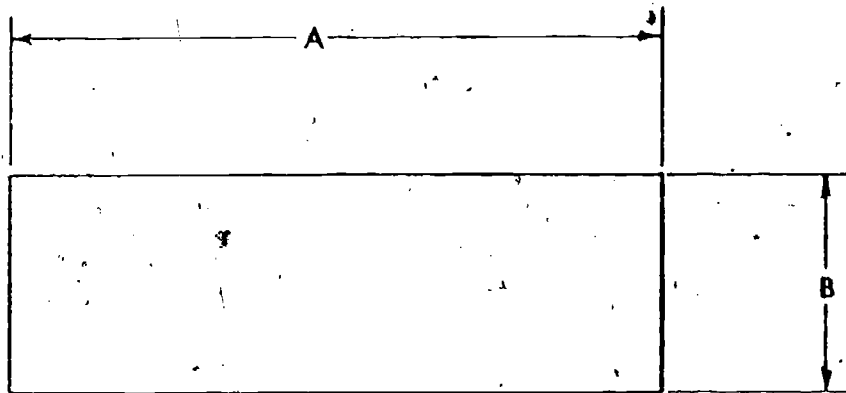


Scale $1/8'' = 1'$

- A. Length _____
- B. Height _____

Study Questions: Continued

5.

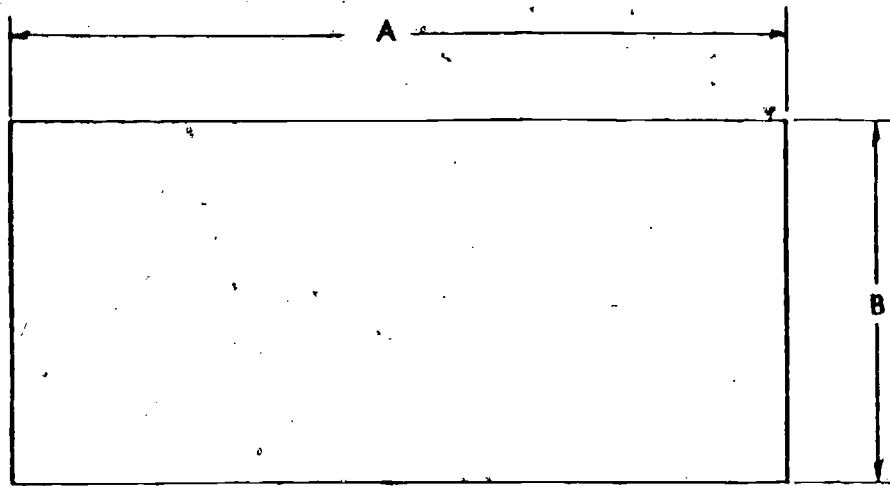


1" = 20'

A. Length _____

B. Height _____

6.

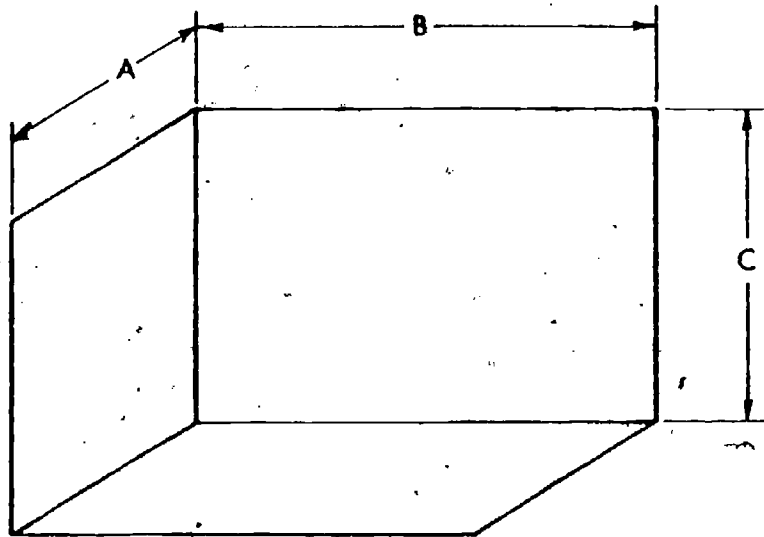

1/4" = 5'

A. Width _____

B. Length _____

C. Height _____


269

APPENDIX 10


HOUSEWIRING MATERIALS

270


WALL PLATES




SINGLE TOGGLE




DUPLEX RECEPTACLE




TWO TOGGLE



SINGLE TOGGLE AND
DUPLEX RECEPTACLE




SINGLE TOGGLE AND
SINGLE RECEPTACLE




TWO TOGGLE AND
DUPLEX RECEPTACLE


WEATHERPROOF DUPLEX
RECEPTACLE (HORIZONTAL)

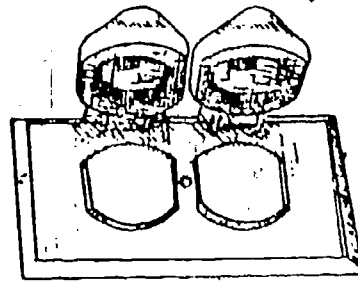


WEATHERPROOF SINGLE RECEPTACLE




WEATHERPROOF
DUPLEX RECEPTACLE
WITH
SCREW COVERS



WEATHERPROOF
DUPLEX RECEPTACLE
(VERTICAL)



COMMON RESIDENTIAL RECEPTACLES




RANGE RECEPTACLE
125/250v, 50 amp




DRYER RECEPTACLE
125/250v, 30 amp




AIR CONDITIONER RECEPTACLE
250v, 20 amps

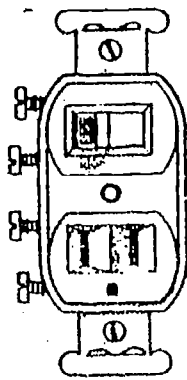


SWITCH AND RECEPTACLE

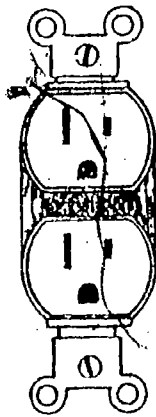

DUPLEX GROUNDING RECEPTACLE
125v, 15 amp

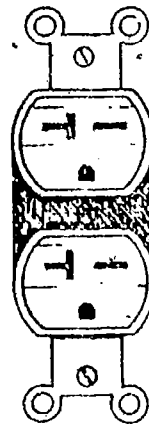


DUAL VOLTAGE RECEPTACLE
125/250v, 20 amp




AIR CONDITIONING RECEPTACLE
250 volt, 30 amp

BOX DESIGN FEATURES

CLAMPS

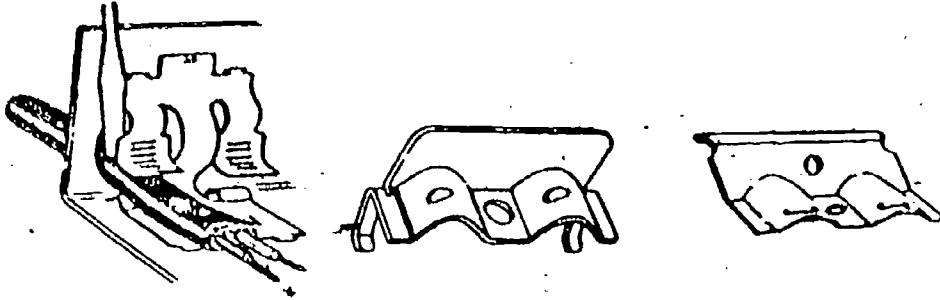


NONMETALLIC CABLE CLAMPS




METALLIC
CABLE CLAMP




BRACKETS

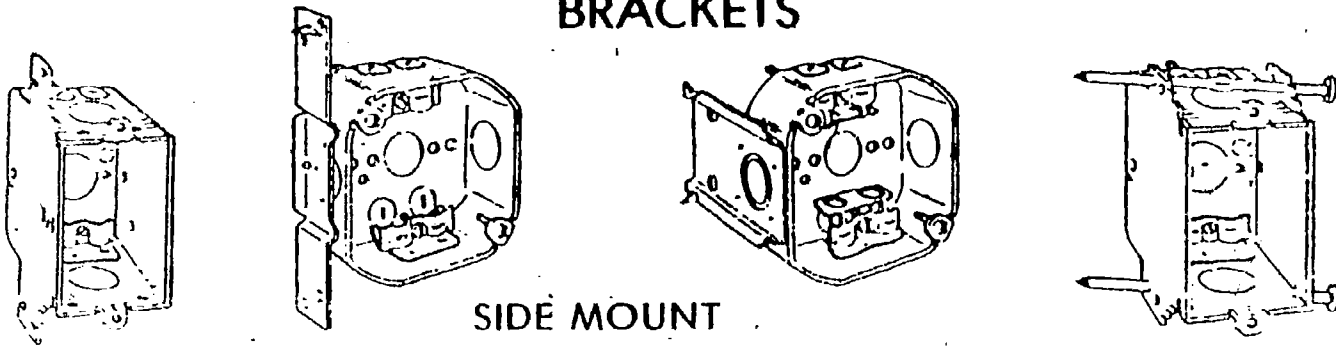

SIDE MOUNT



FRONT MOUNT




SIDE AND FRONT MOUNT


Continued

OCTAGON AND SQUARE BOXES


OCTAGON BOXES




WITH CABLE CLAMPS
AND NAIL HOLES




WITH BRACKET



EXTENSION




WITH CABLE CLAMPS
AND GROUNDING PIGTAIL

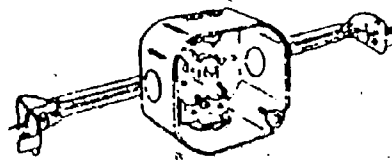


WITH BAR HANGER
AND CABLE CLAMPS


SQUARE BOXES




SQUARE BOX (ONE PIECE
MOLDED CONSTRUCTION)




SQUARE BOX (ONE PIECE
WELDED CONSTRUCTION)



WITH BRACKET



WITH BRACKET, CABLE CLAMPS
AND GROUNDING PIGTAIL




EXTENSION


Fig. 1
Continued

DEVICE BOXES


HANDY BOXES




HANDY BOX
(MOLDED
CONSTRUCTION)



HANDY BOX
(WELDED
CONSTRUCTION)




EXTENSION




BRACKET BOX

SWITCH BOXES




BRACKET
NON-GANGABLE
WITH
CABLE CLAMPS




GANGABLE
WITH
NAIL HOLES




GANGABLE
WITH
EARS AND
CABLE CLAMPS




GANGABLE
BRACKET BOX
WITH
CABLE CLAMPS




WITH
DRYWALL GRIPS,
CABLE CLAMPS
AND EARS




BEVELED
CORNER
WITH
CLAMPS



GANGABLE
WITH
GROUNDING
PIGTAIL



NAIL ON




SOLID
TWO GANG
BRACKET

BOX COVERS


ROUND COVERS




FLAT
BLANK




FLAT WITH
KNOCK OUT




RAISED WITH
KNOCK OUT




RAISED FOR
SINGLE DEVICE



RAISED
OPEN



FLAT
TOGGLE




FLAT DUPLEX
RECEPTACLE



FLAT SINGLE
RECEPTACLE

SQUARE COVERS




FLAT BLANK




FLAT BLANK
WITH
KNOCK OUT




RAISED OPEN




FLAT
SINGLE DEVICE



RAISED
SINGLE DEVICE




FLAT
TWO DEVICE




RAISED
TWO DEVICE

SWITCHES


SINGLE POLE




THREE WAY




FOUR WAY



DOUBLE POLE



DIMMER



LOW VOLTAGE
PUSH BUTTON




APPENDIX 11
READING METERS

278


204

This voltmeter will read from left to right on the scale.

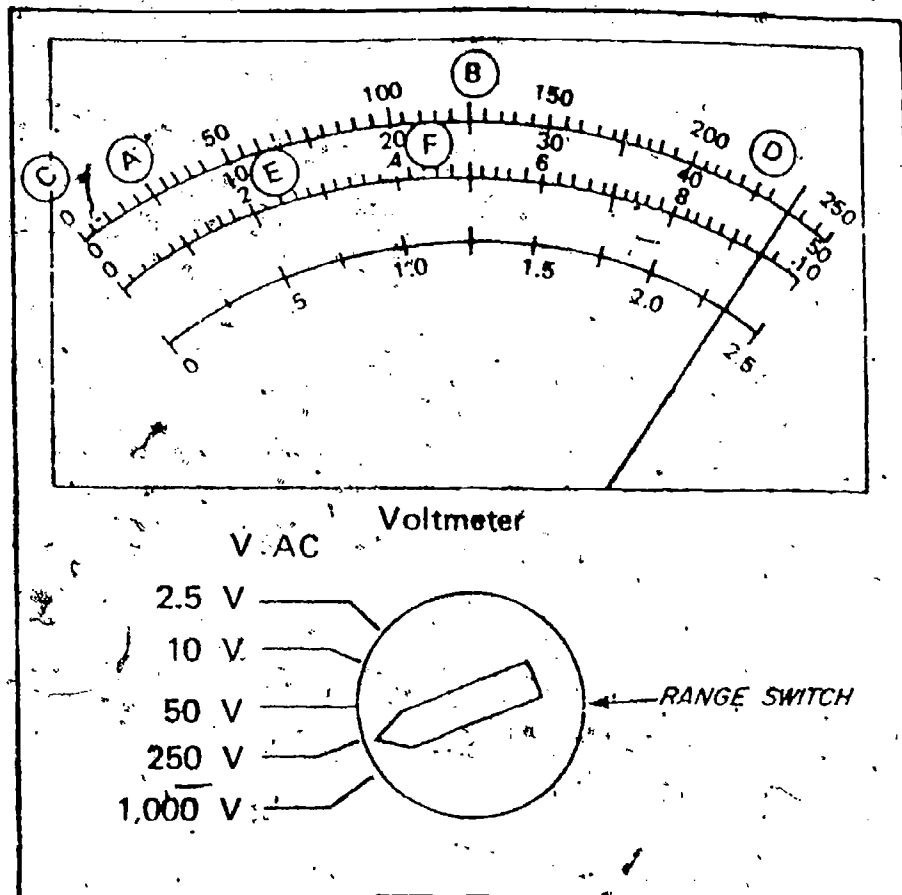

1. With the range switch at 250V, the needle on the meter is indicating 235V.
2. Range switch in the 250V position. Needle is pointing to "B" on the scale. The meter is indicating 125V.
3. Range switch in the 50V position. Needle is pointing to "B" on the scale. The meter is indicating 25V.
4. Range switch in the 1000V position. (NOTE: Use the 0-10 scale when in the 1000V position.) Since 1000 is 100 times greater than 10, multiply any reading taken from the 0-10 scale by 100. Needle is pointing to "E" on the scale. The meter is indicating $2.4V \times 100 = 240V$.
5. Range switch in the 250V position. Needle is pointing to "A" on the scale. The meter is indicating 25V. (The reading would be more accurate if the range switch were changed to 0-50V.)
6. Range switch in the 250V position. Needle is pointing to "C" on the scale. The meter is indicating 0V. (The range switch should be switched in the direction of the lowest range until the proper range is reached.)

Read the resistances on the ohmmeter scale below. This ohmmeter scale reads from right to left.

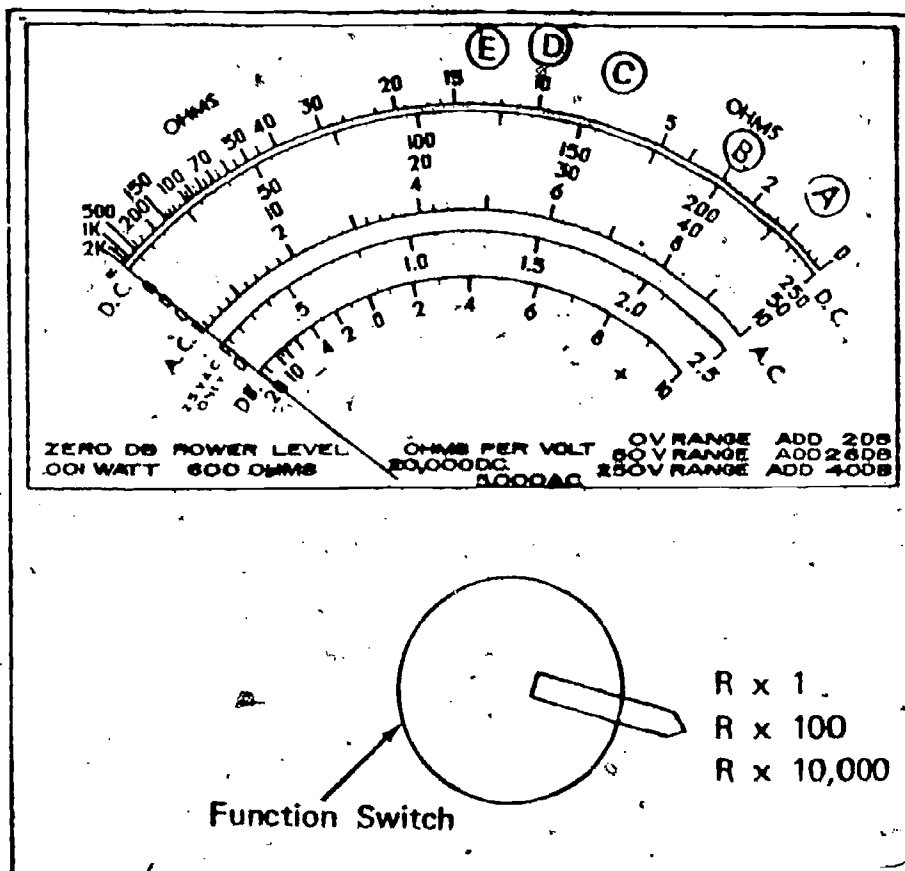

(NOTE: The letters on the scale are there for the purpose of working this exercise and they do not appear on actual ohmmeters.)

Example: With the function switch at R x 10,000 and the needle pointing at 2 on the scale

$$\begin{array}{r} 10,000 \\ \times 2 \\ \hline 20,000 \text{ ohms} \end{array}$$

290

Using the Ammeter in a Circuit

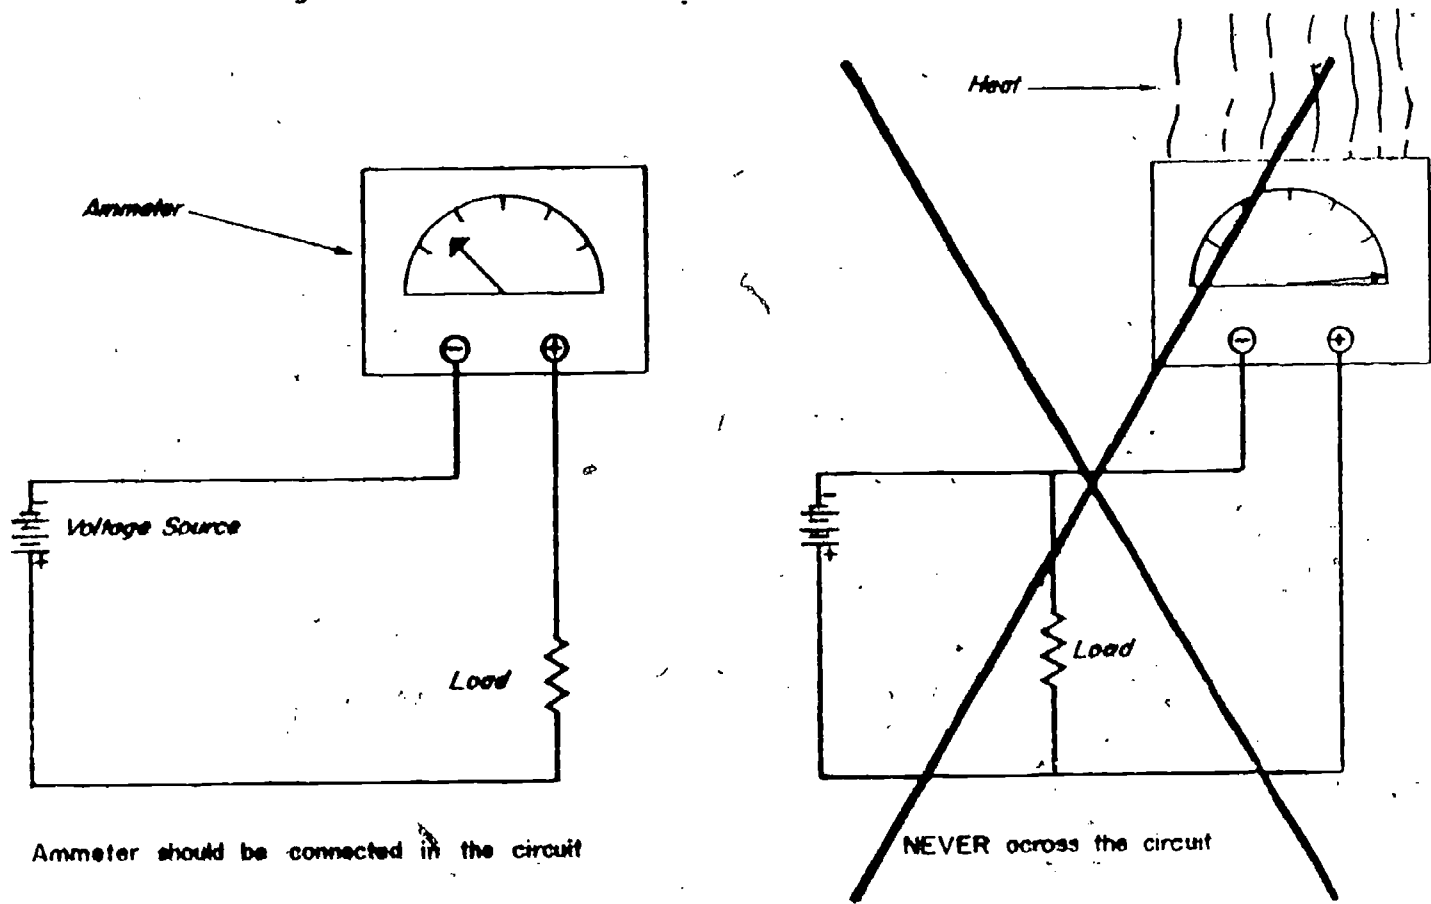


Fig. 1

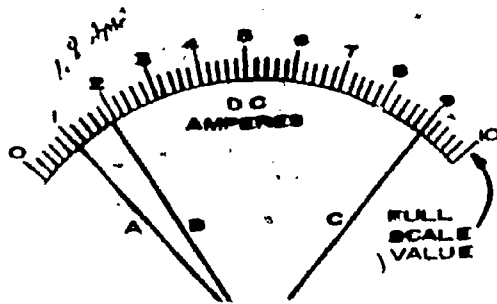


Fig. 2


APPENDIX 12

SAMPLE LAB EXERCISES

282

208

DIODE CHARACTERISTICS

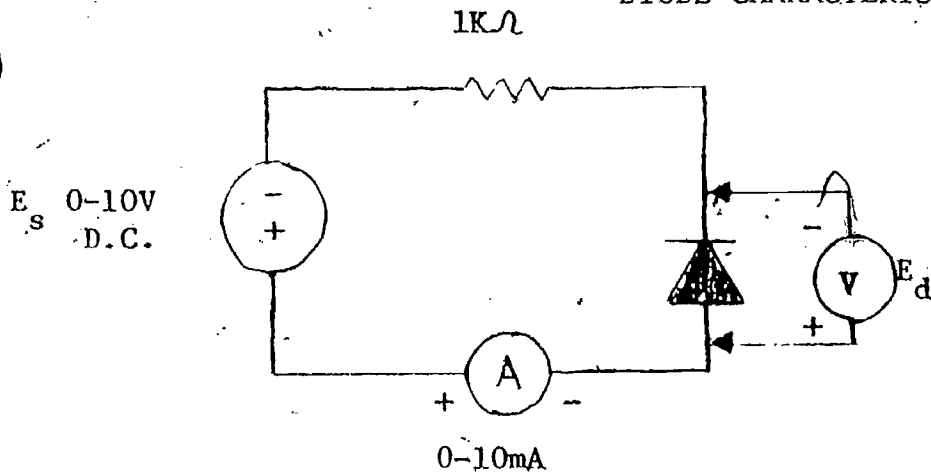

MATERIALS

- 1 $k\Omega$ resistor
- 1 N4001 diode
- 0-10 mA Ammeter
- 0-50 μ A Ammeter
- Volt ohmmeter
- VTVM or electronic voltmeter
- Variable Power Supply

- Construct the circuit shown in the schematic diagram. Begin by adjusting E_s to 0.2V. Record E_d and current in chart. Complete chart at values indicated.

E_s	0.2	0.5	0.7	1.0	2.0	3.0	4.0	5.0	10.0
E_d									
I									

Is diode forward biased or reverse biased? _____

- Reduce voltage to zero. Reverse diode connections and replace the 0-10 mA ammeter with a 0-5- μ A ammeter. Repeat the measurements from step 1.


E_s	0.2	0.5	0.7	1.0	2.0	3.0	4.0	5.0	10.0
E_d									
I									

Is diode forward biased or reverse biased? _____

Using graph paper graph the volt-ampere characteristics of the diode (I vs E_d). Remember that at $E_d = 0$, $I = 0$.

ZENER DIODE CHARACTERISTICS

1K Ω

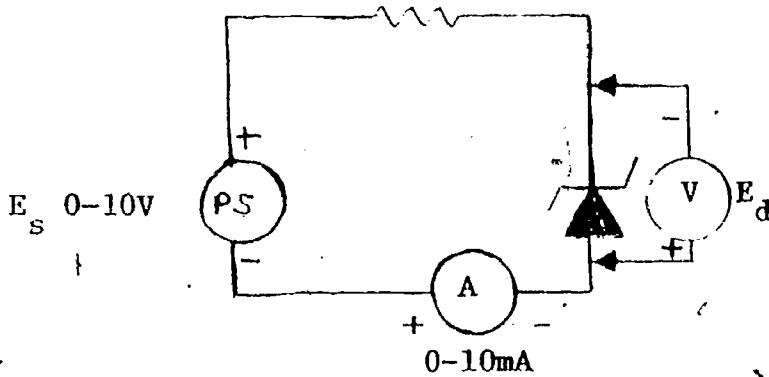

Materials

- 1 K Ω Resistor
- Zener diode 6.8 V
- 0-10 mA Ammeter
- 0-50 μ A Ammeter
- VTVM or Electronic Voltmeter
- Volt ohmmeter
- Variable Power Supply

- Construct the circuit shown in the schematic above. Be sure to check the polarity of the meters. Adjust E_s to 0.2V. Record diode voltage E_d , and Current, I , in chart below. Continue for each value of E_s indicated.

E_s	0.5	1.0	2.0	3.0	5.0	6.0	7.0	8.0	10.0
E_d									
I									


Compare your results with the forward bias results from the diode characteristics lab.

- Reduce the voltage to zero. Reverse the diode connections. Replace the 0-10 mA ammeter with the 0-50 μ A ammeter. Repeat the measurement taken in Step 1.
NOTE: At some voltage level the 0-50 μ A ammeter may need to be replaced by the 0-10 mA. At this point be sure and reduce power to zero before making changes in the circuit.

E_s	0.5	1.0	2.0	3.0	5.0	6.0	7.0	8.0	10.0
E_d									
I									

Using graph paper graph the volt-ampere characteristics of the diode (I vs E_d)

SCR CHARACTERISTICS

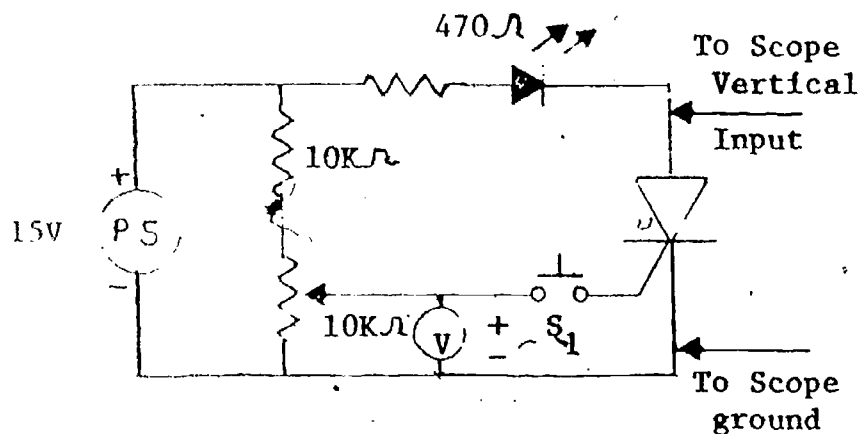

Materials

- 470Ω Resistor
- 10KΩ Resistor
- 10KΩ Potentiometer-linear
- PBNO Switch
- GE106B1 S.C.R.
- Red LED
- VTVM
- Oscilloscope

1. Construct the circuit shown in the schematic diagram. Adjust 10KΩ pot to the middle range. Apply 15 V DC in the polarity indicated. Did the LED light? Why?
 Close switch S₁. What happened? Why?
 Release S₁. What happened? Why?
2. Reduce voltage to zero. Reverse the connections of the power supply and the diode. Reapply the 15V. What happened?
 Close S₁. Did the LED light? Why?
3. Reduce voltage and return power supply and diode connections to normal (step 1). Connect VTVM from ground to potentiometer as shown. Adjust to zero volts with meter on the 1 volt scale. Connect jumper wire across S₁ terminals. Slowly turn potentiometer until LED lights. Record VTVM reading. This voltage is referred to as turn on voltage. Readjust potentiometer to midpoint and reduce supply voltage to zero. Remove jumper from S₁. Remove VTVM.
4. Replace the 15V D.C. supply with 15V A.C. supply. Apply voltage and depress S₁. What happened?
 Release S₁. What happened? Why?
5. Reduce supply to zero. Connect oscilloscope as shown in schematic. Replace jumper on S₁ terminals. Apply voltage. LED should be lighted. Adjust potentiometer for maximum brightness of LED. Using oscilloscope, measure peak voltage of waveform.


Sketch the scope display.

Readjust potentiometer to middle position. Has waveform changed? How?
 Reduce potentiometer for minimum LED brightness.

Measure peak voltage of waveform

Sketch the scope display.

I.C. AMPLIFIER

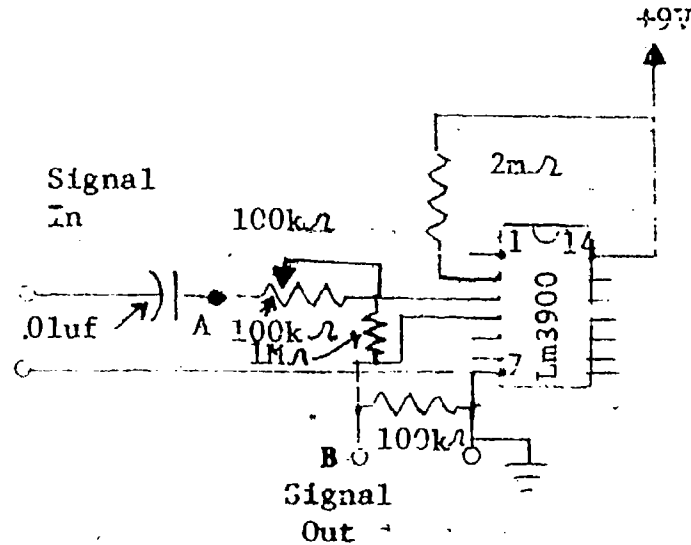

Materials

- LM3900N Quad op Amp I.C.
- 2 100 KΩ Resistor
- 100 KΩ potentiometer
- 1 MΩ Resistor
- 2 MΩ Resistor
- 0.01 uF capacitor
- 1 MΩ potentiometer
- Breadboard
- Signal generator
- Oscilloscope
- Power supply

- Construct the circuit shown. Using oscilloscope, adjust output of the signal generator to 0.5V peak-to-peak at 1000 HZ. Adjust potentiometer for minimum resistance. Apply signal to input and power to chip.

- Using oscilloscope measure the voltage at points A and B.

$E_A =$ _____ $E_B =$ _____

Determine voltage gain ($\frac{E_B}{E_A}$) = _____ Is the signal at E_B in phase or inverted as compared to E_A ?

- Adjust potentiometer to midrange. Repeat measurements from step 2.

$E_A =$ _____ $E_B =$ _____ $E_{Gain} =$ _____


- Adjust potentiometer to maximum resistance. Repeat the measurements from step 2.

$E_A =$ _____ $E_B =$ _____ $E_{Gain} =$ _____

- Remove power. Replace the 100KΩ potentiometer with the 1 MΩ potentiometer. Apply power. Adjust for maximum voltage output. $E_B =$ _____ Determine gain. $E_{gain} =$ _____ Adjust potentiometer for minimum output.

Determine gain. _____ What can you conclude about the effects of the MΩ potentiometer on the gain of the circuit?

L.E.D. FLASHER

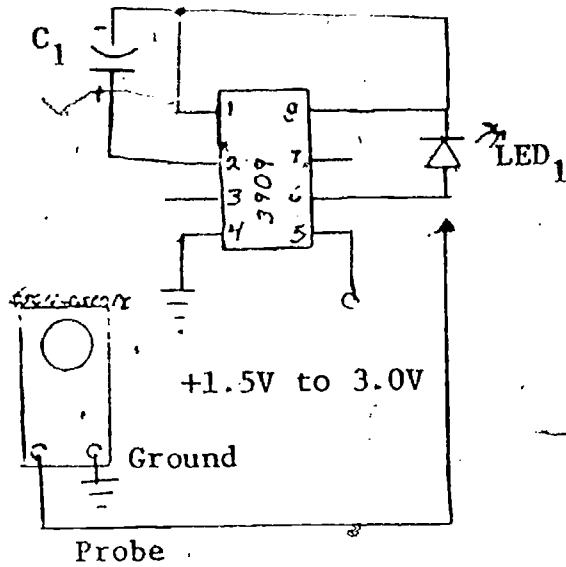

I.C. 1 3909 LED Oscillator Chip

C₁ 35 to 50 uf electrolytic, 10 V


LED₁ Red Light Emitting Diode

Power supply or 1.5 V battery


Hook-up wire

Breadboard

1. Connect circuit as indicated in schematic diagram. Note that pins 3 and 7 are not connected. Upon applying power LED should flash at a rate of approximately 6 Hertz.
2. Connect oscilloscope as shown to display output waveform. Sketch the waveform.
3. Using the oscilloscope measure the peak voltage. _____
4. Disconnect the circuit from power. Remove the connection from Pin 1 to Capacitor C₁. Be sure pin 8 is still connected to Capacitor C₁. Reconnect the power. Has the output changed? _____ How? _____

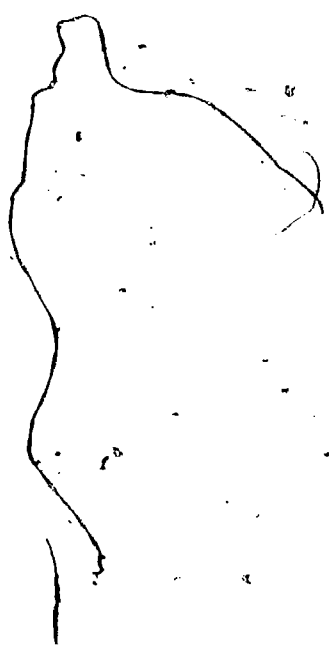

SQUARE WAVE GENERATOR

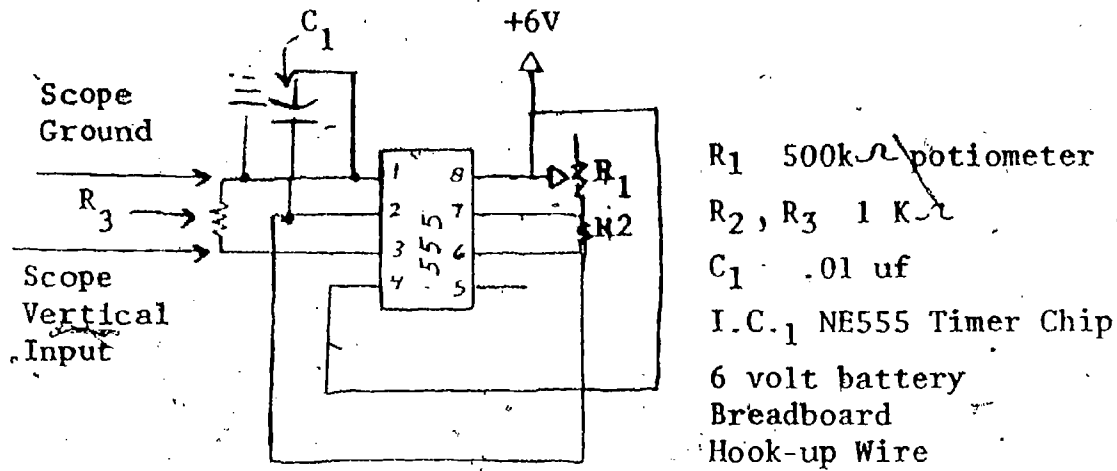

1. Construct the circuit as shown in the schematic diagram. Note that Pin 5 is not connected and that pin 3 is the output. R₃ is acting as a load.
2. Adjust R₁ for maximum resistance using ohmmeter. Connect oscilloscope to R₃ as shown. Apply power to the circuit.
3. Sketch the output waveform.
 What is the peak voltage?
 Decrease the resistance of R₁. What effect does this have on the frequency?
 Why?


288

APPENDIX 13


PRINTED CIRCUIT BOARD CONSTRUCTIONS

289

215

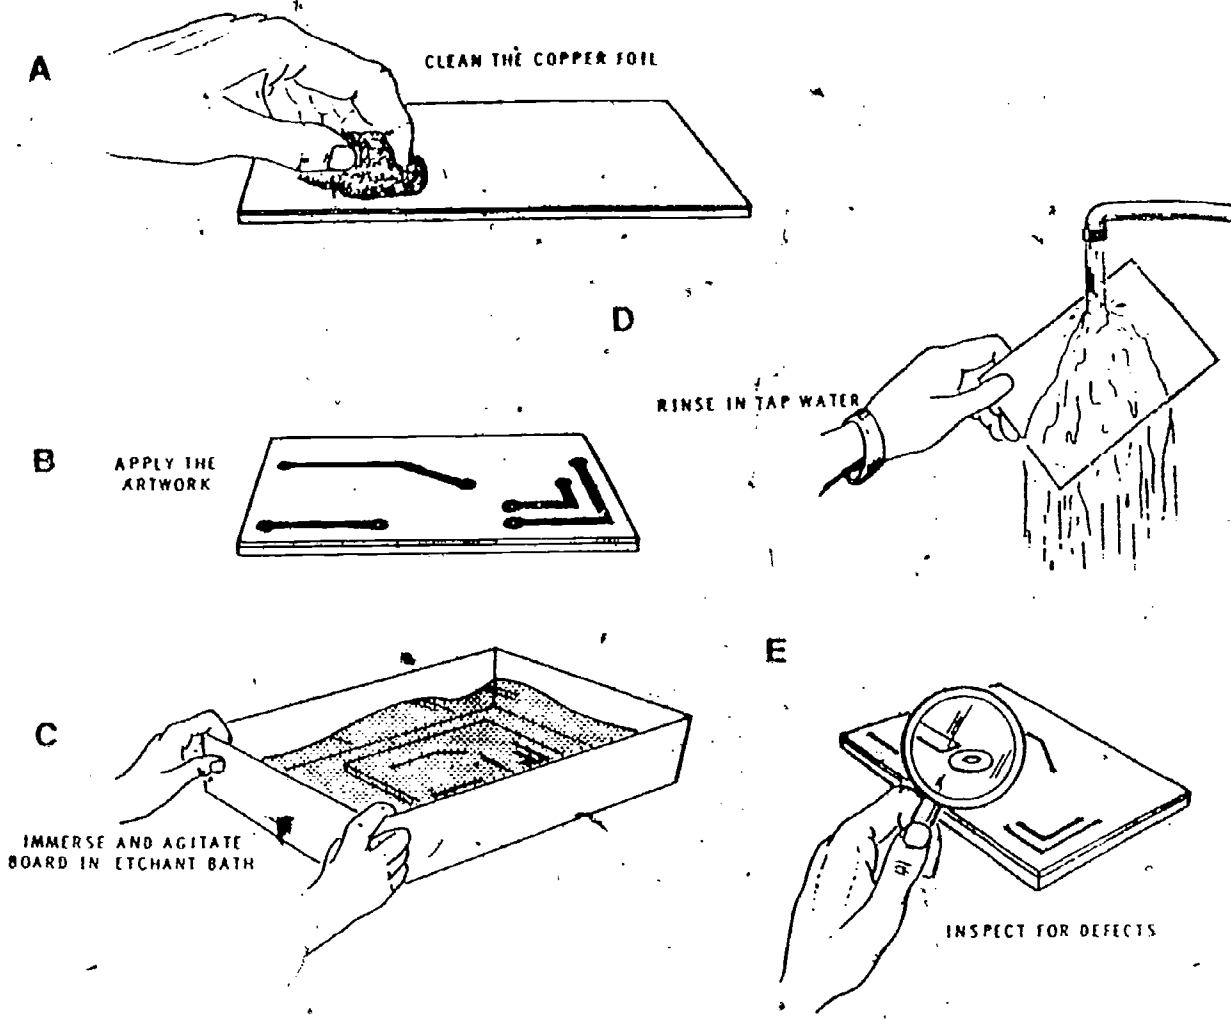

Direct pattern etching process.

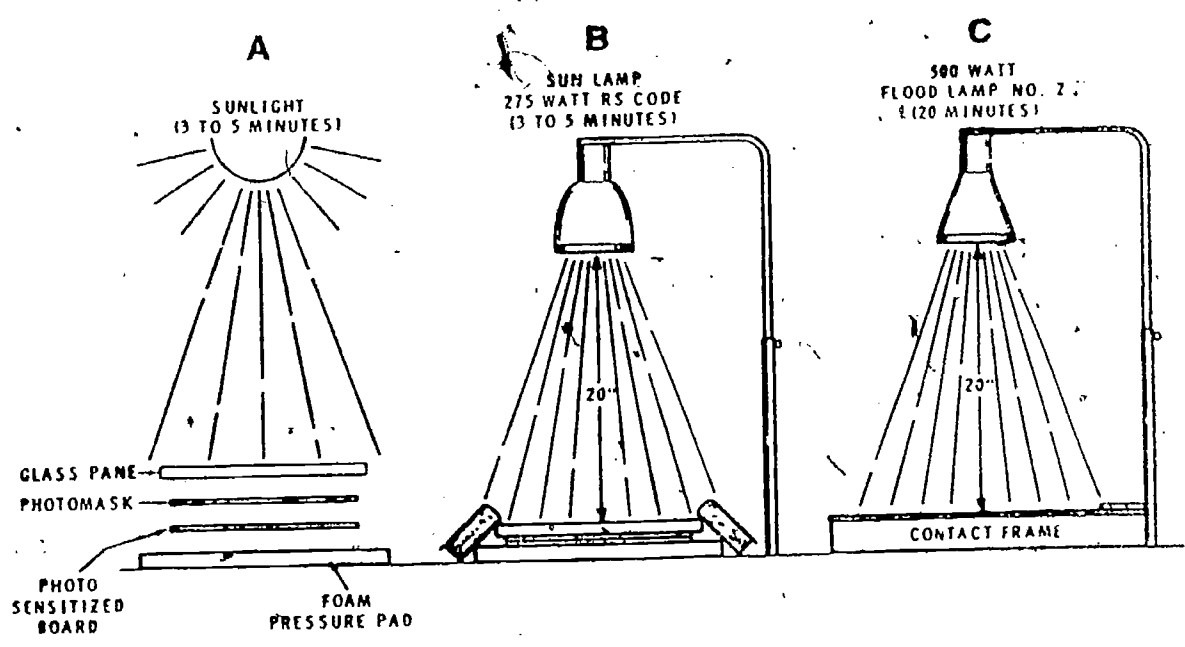


BEST COPY AVAILABLE


290

Methods of exposing photo-sensitized circuit board.

A
CLAMPING THE PC BOARD

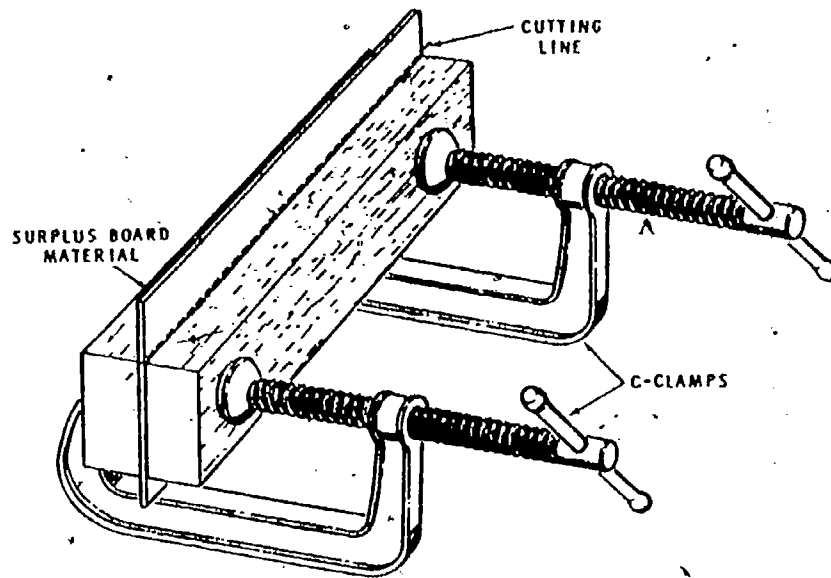


B
HAND SAWING THE PC BOARD

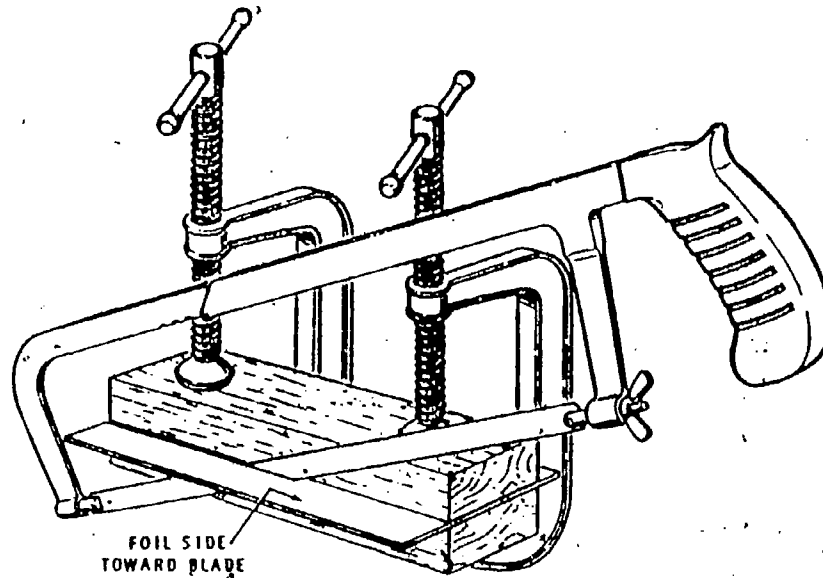



Handsawing PC boards.

A
DRILL POINT ANGLE

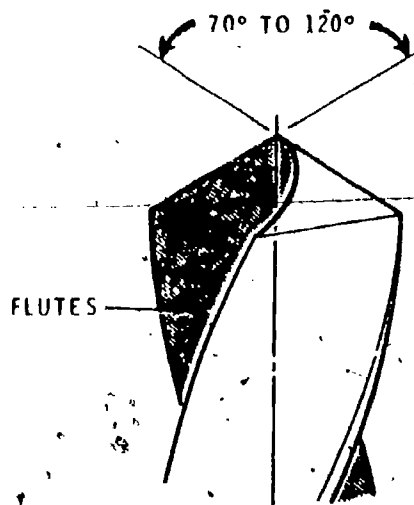

B
RPM GUIDE FOR DRILLING 1/16 INCH
PC BOARD MATERIALS

DRILL SIZE	SPEED (rpm)
No. 70	5000
No. 65	5000
No. 60	5000
1/16 inch	5000
1/8 inch	3000
3/16 inch	2500
1/4 inch	1700
5/16 inch	1300
7/16 inch	600

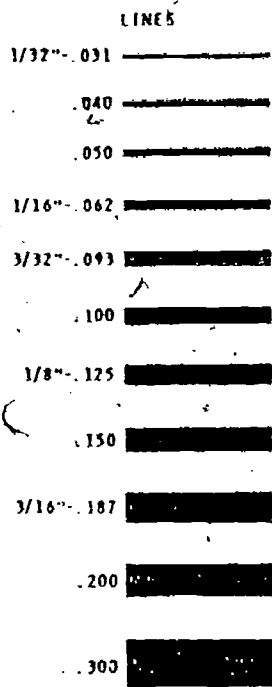


JOGS




B

ART TAPE

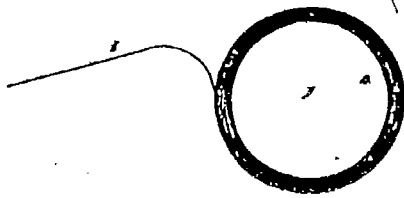


C

ETCH RESIST INK PEN




Design aids for making circuit board conductors.
(Courtesy of THE DATAK CORPORATION)


CONNECTORS

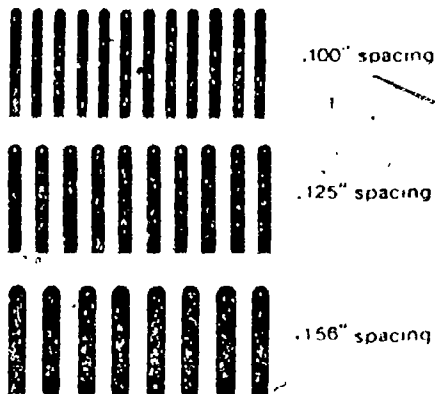


TRANSISTORS and IC's

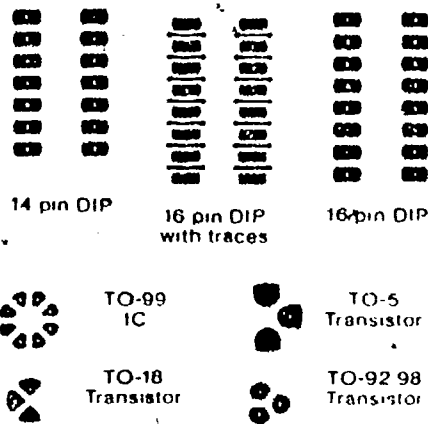

PRESPACED DONUTS

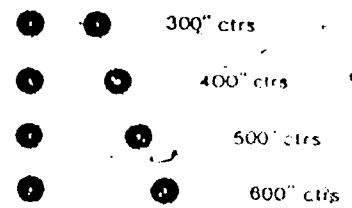


DONUTS




Dry transfer design aids.
(Courtesy of THE DATAK CORPORATION)

A

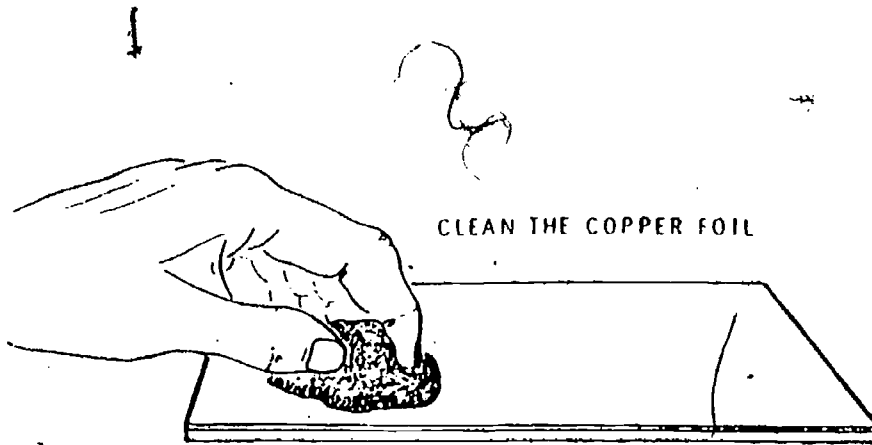


B

APPLY THE ARTWORK

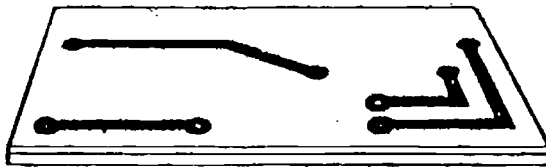


D

RINSE IN TAP WATER

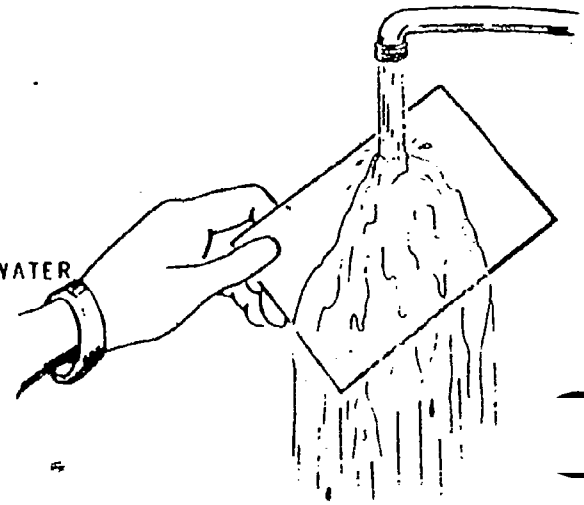


C

IMMERSE AND AGITATE BOARD IN ETCHANT BATH




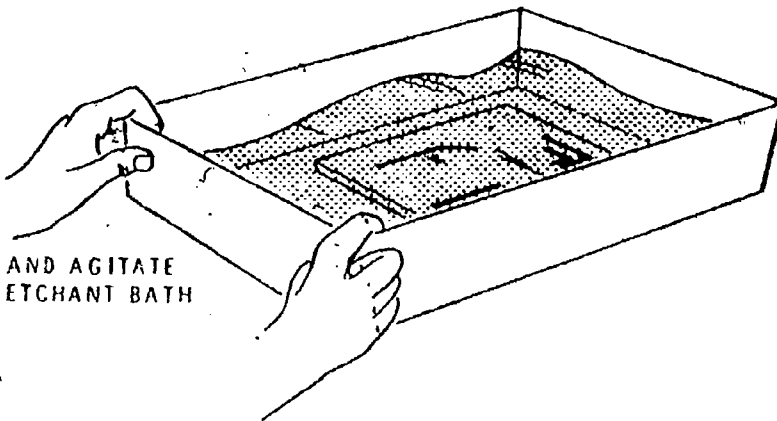





E

INSPECT FOR DEFECTS

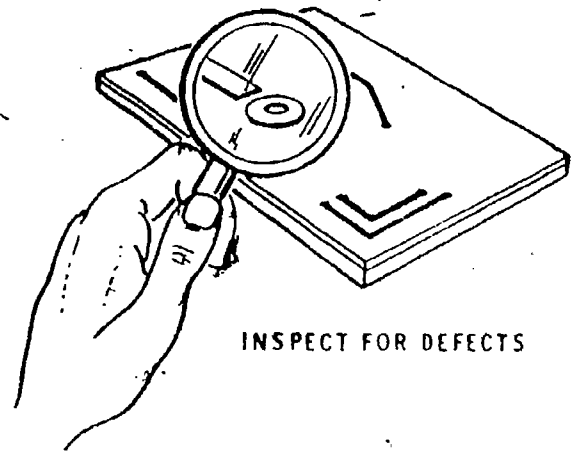


Direct pattern etching process.

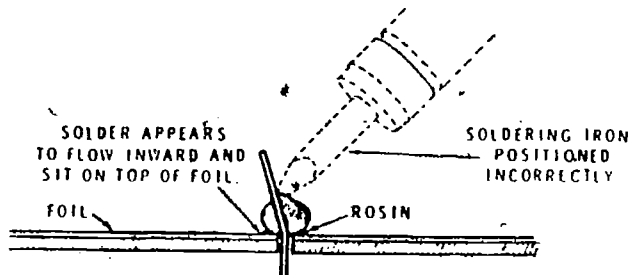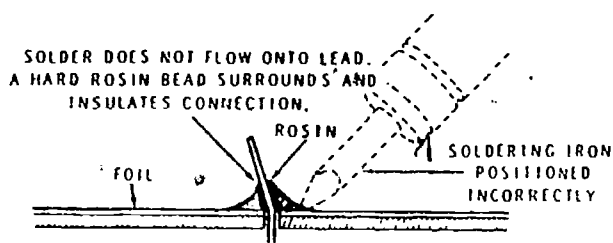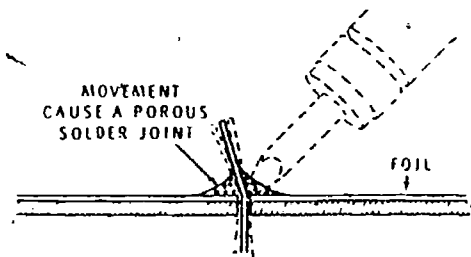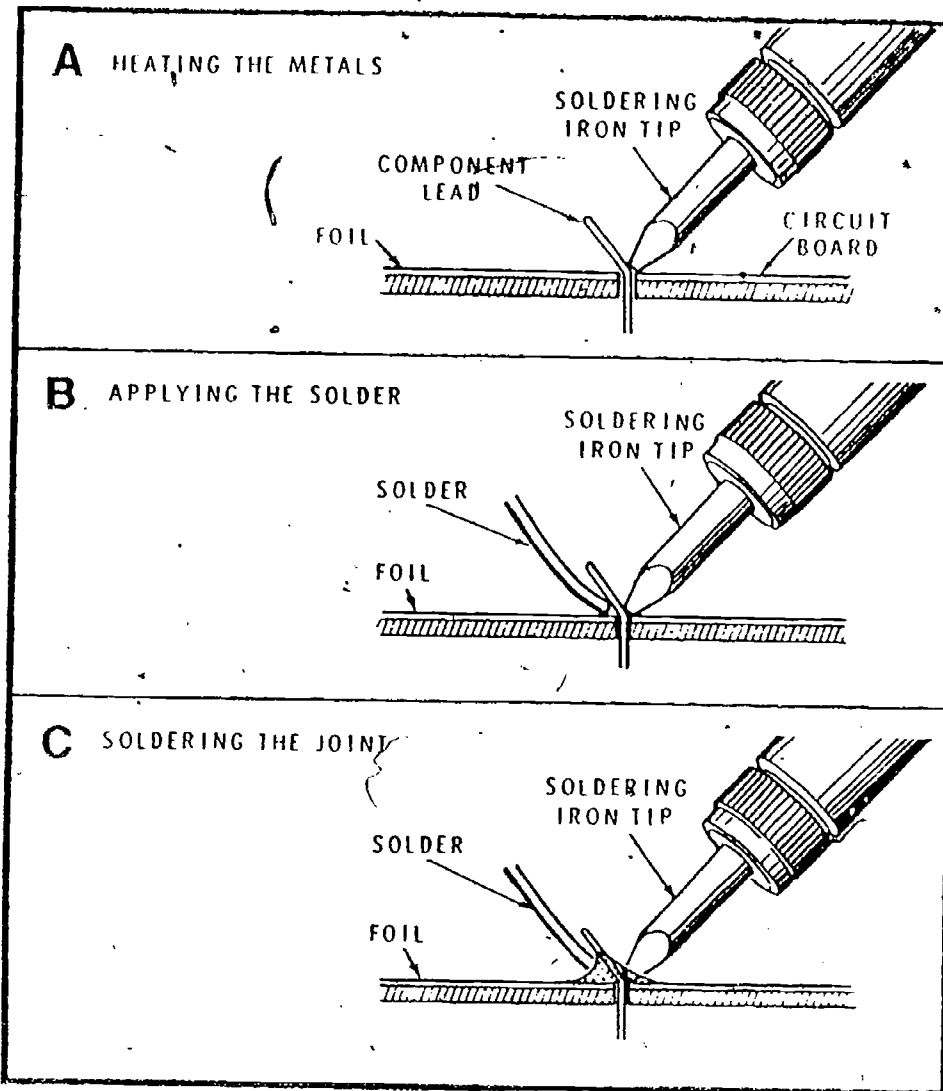


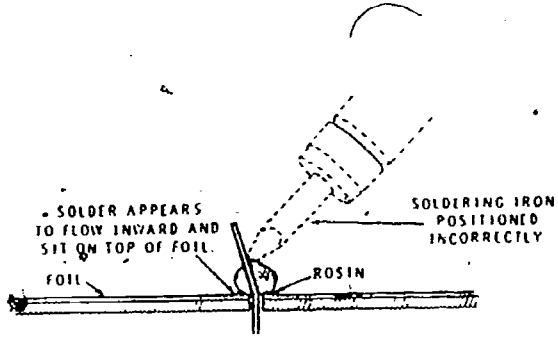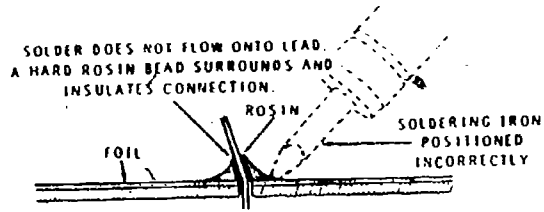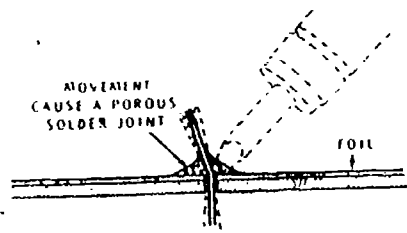

A
COLD SOLDER JOINTS HAVE
A DULL, GRAINY TEXTURE

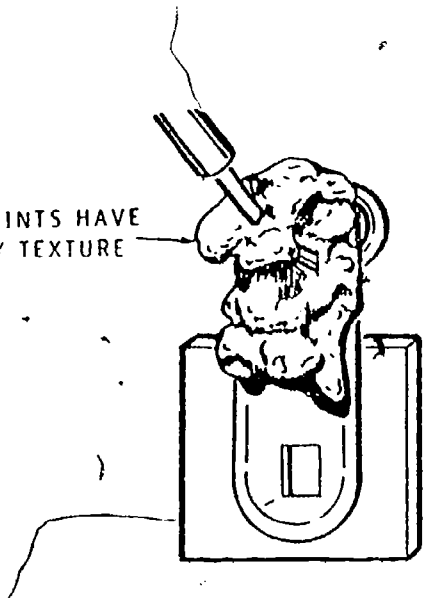

B
NOTICE THAT THIS CONNECTION
IS SMOOTH AND SHINY, AND THAT
THE SOLDER BLENDS SMOOTHLY
WITH THE TERMINAL.

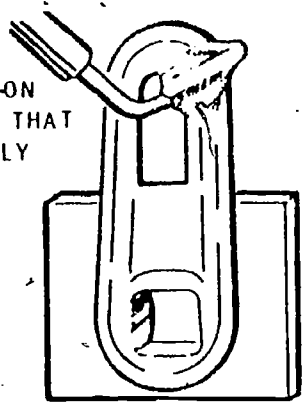


APPENDIX 14

ROBOTICS

296


222

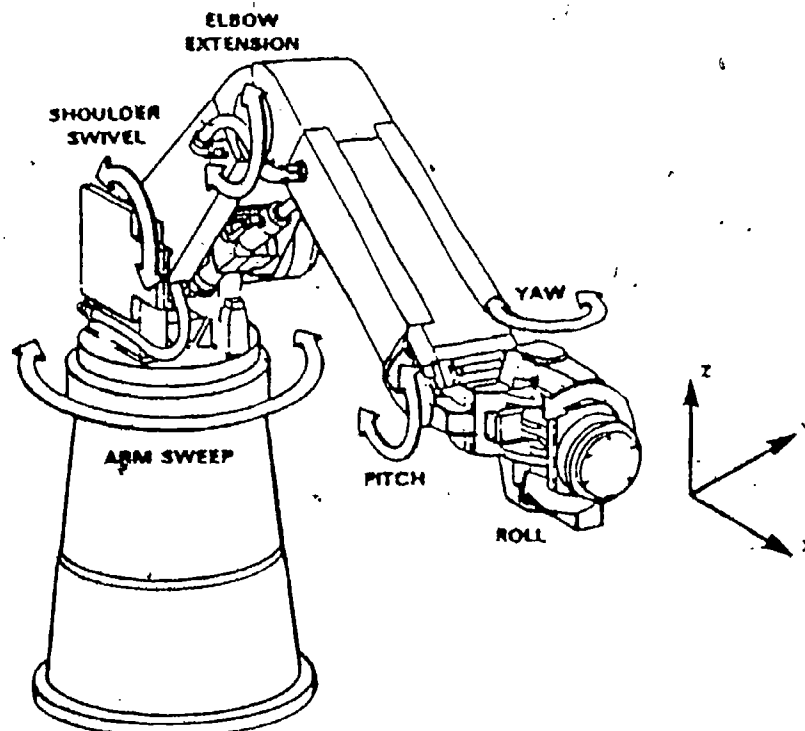



Mechanical Configuration and Coordinate System

(Courtesy Cincinnati Milacron, Lebanon, Ohio)


ROBOT ARC WELDING SYSTEM

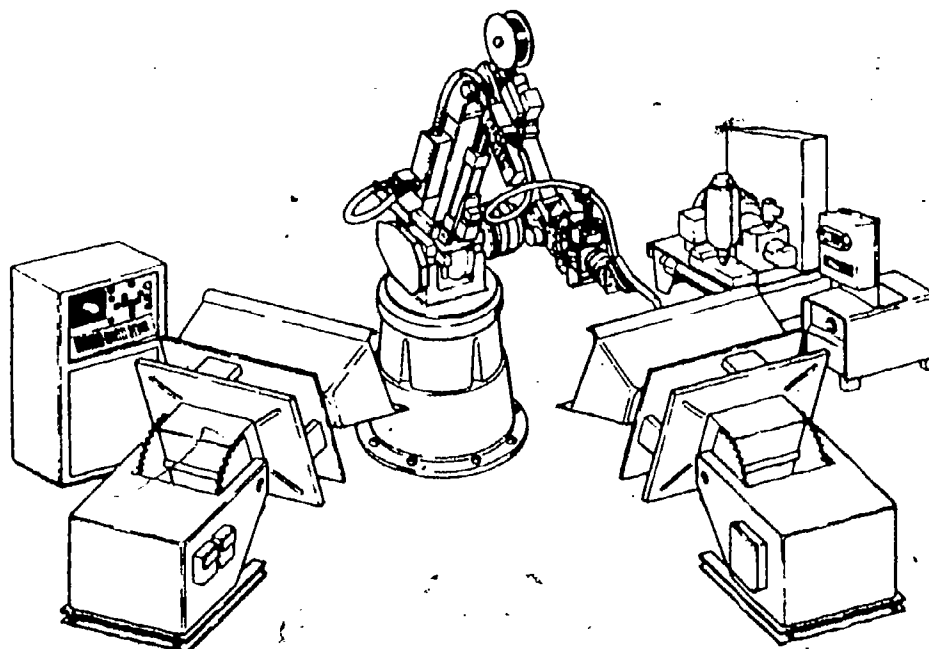

(Courtesy Cincinnati Milacron, Lebanon, Ohio)

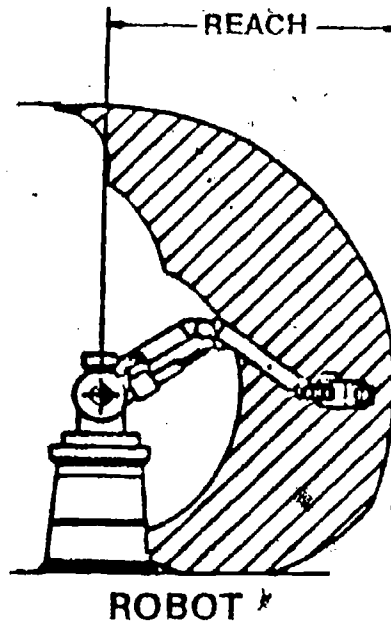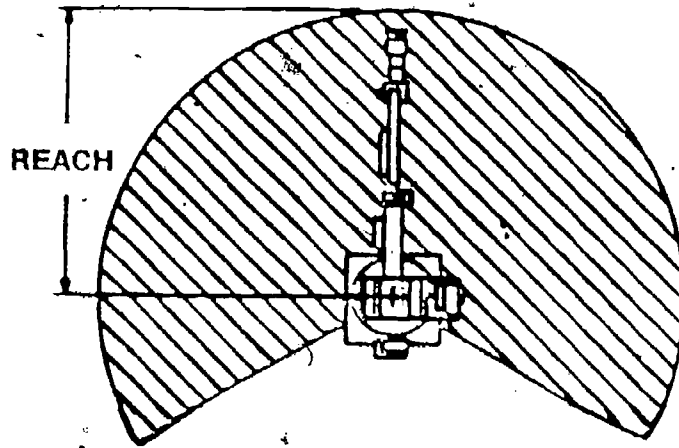


(Courtesy Robot Systems, Inc., Norcross, GA)

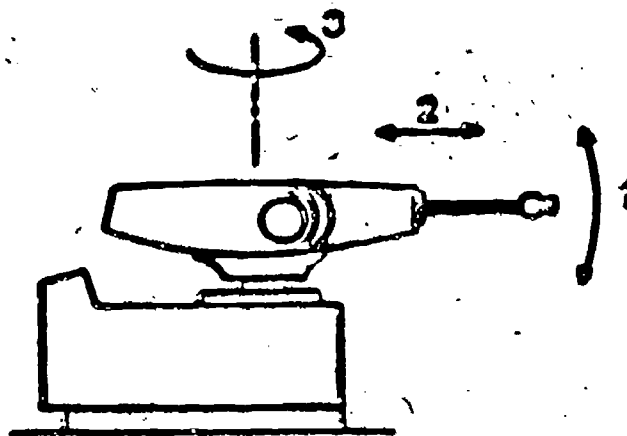



SPHERICAL COORDINATE

(Courtesy Unimation Incorporated, Danbury, CT)

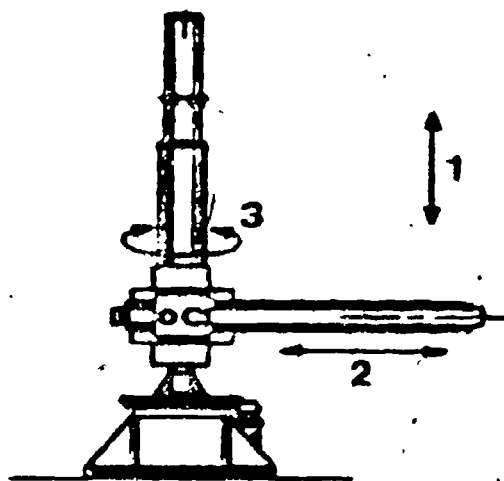


CYLINDRICAL COORDINATE

(Courtesy Prab Robots, Inc., Kalamazoo, Michigan)

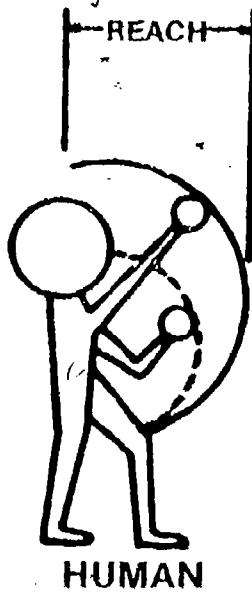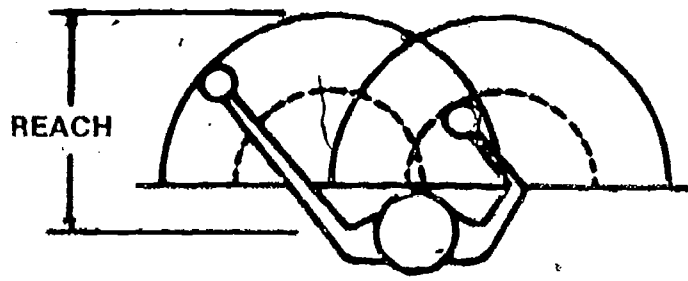

(Courtesy Robot Systems, Inc., Norcross, GA)

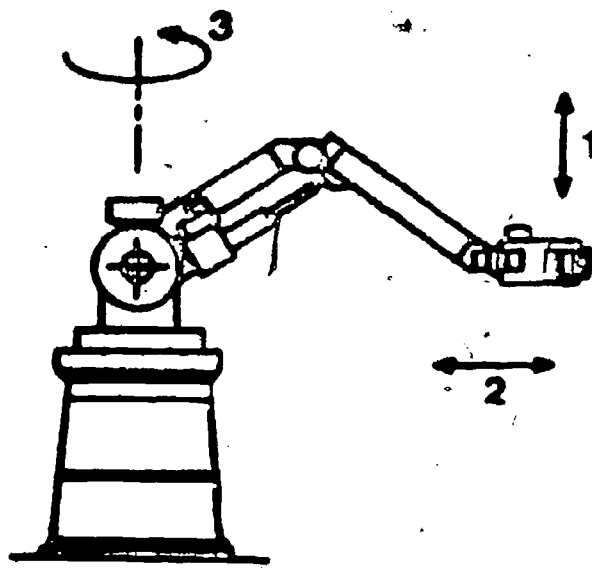

JOINTED ARM 300

APPENDIX 15

BODY EFFECTS OF CURRENT

301

227

Body Effects on Current

Current and its effects on the human body at 120V, 60 hertz (cycle):

.0005 or less amperes -- no sensation

.0005 to .002 amperes -- threshold of perception

.002 to .010 amperes -- muscular contraction (mild to strong)

.005 to .025 amperes -- painful shock, inability to let go

.025 to .050 amperes -- violent muscular contraction

.050 to .200 amperes -- ventricular fibrillation (convulsive movement of the heart - fatal)

over .100 amperes -- paralysis of breathing (apply artificial respiration immediately)

BIBLIOGRAPHY

1. Baker, George and Meravi, Thomas. Introduction to Robotics. Presentation to American Industrial Arts Association, 1983.
2. Barker, Ron G. Robotic: An Introduction for Your Classroom. Industrial Education and Industrial Technology, Berry College MT, Berry, GA, 1983.
3. Blitzer, Richard. Basic Electricity for Electronics. New York: John Wiley & Son, Inc., 1974.
4. Boylestad, Robert and Nashelsky, Louis. Electricity, Electronics and Electromagnetics. Englewood Cliffs, NJ: Prentice-Hall, 1983.
5. Buban, Peter and Schmitt, Marshal. Technical Electricity and Electronics. New York: McGraw-Hill, 1977.
6. Buban, Peter and Schmitt, Marshal. Understanding Electricity and Electronics. New York: McGraw-Hill, 1975.
7. Combs, Clyde F. Printed Circuits Handbook. New York: McGraw-Hill, 1967.
8. Douglass, Malcolm Jr. Fundamentals of Electronics. Belmont, CA: Breton, Inc., 1983.
9. Engellberger, Joseph F. Robotics in Practice. American Management Associations, 1980. T59.4, E53.
10. Faber, Rodney B. Applied Electricity and Electronics for Technology. 2nd ed. New York: John Wiley & Sons, 1982.
11. Freilberger, Stephen and Chew, Paul Jr. Personal Computing and Microcomputers. Rochelle Park, NJ: Hayden Book, 1978.
12. Fowler, Richard. Electricity: Principles and Practices. New York: McGraw-Hill, Inc., 1979.
13. Gerrish, Howard H. and Dugger, William E. Transistor Electronics. South Holland, Illinois: Goodheart and Wilcox, 1981.
14. Gerrish, Howard H. Electricity. South Holland, Illinois: The Goodheart-Wilcox Company, Inc., 1978.
15. Goody, Roy W. The Intelligent Microcomputer. Chicago: Science Research Associates, Inc., 1982.
16. Grab, Berand. Basic Electronics. New York: McGraw-Hill, Inc., 1977.
17. Hand, William P. and Williams, Gerald. Basic Electronics Components, Devices and Circuits. Encino, CA: Glencoe Publishing Co., Inc., 1980.

18. Heathkit Educational System. D. C. Electronics. Benton Harbor, Michigan: Heath Company, 1975. #EE-3201.
19. Heathkit Educational System. Electronic Test Equipment. Benton Harbor, Michigan: Heath Company, 1982. #EE-3105A.
20. Heathkit Educational System. Printed Circuit Boards. Benton Harbor, Michigan: Heath Company, 1980. #E1-3134.
21. Heathkit Educational System. Semiconductor Devices. Benton Harbor, Michigan: Heath Company, 1980. #E1-3134.
22. Houghlum, Roger J. Electronics: Concepts, Application and History. Boston: Breton, Inc., 1980.
23. Matt, Stephan R. Electricity and Basic Electronics. South Holland, Illinois: The Goodheart-Wilcox Company, Inc., 1980.
24. Miller, Rex and Culpepper, Fred W. Energy: Electricity/Electronics. Cincinnati, Ohio: Southwestern Publishing Company, 1982.
25. Mims III, Forrest M. Engineer's Notebook: A Handbook of Integrated Circuit Applications. Dallas, TX: Tandy Corporation, 1977.
26. Mottershead, Allen. Introduction to Electricity and Electronics. New York: John Wiley & Sons, Inc., 1982.
27. National Fire Protection Association. National Electrical Code. National Fire Protection Association, 1984.
28. Olsen, George and Mims, Forrest. The Beginners Handbook of Electronics. Englewood Cliffs, NJ: Prentice-Hall, 1980.
29. Perry, L. Robert. Owning your Home Computer. Pickering, Ontario: Cavan, Navan and Kells, 1980.
30. Roth, Charles H. Jr. Use of Oscilloscope. Englewood Cliffs, NJ: Prentice-Hall, 1970.
31. Schuler, Charles H. Electronics: Principles and Applications. New York: McGraw-Hill, Inc., 1979.
32. Technical Education Department. NCR Corporation, NCR Electronic Course with Experiments. Indianapolis, Indiana: Howard W. Sams & Co., Inc., 1978.
33. Wilson, J. A. and Kaufman, Milton. Basic Electronics: Theory and Practice. New York: McGraw-Hill, 1977.
34. Young, John F. Robotics. New York: John Wiley & Sons, 1973.
35. Louisiana State Department of Education. General Safety Manual for Vocational Education and Industrial Arts Program, Bulletin 1674. Baton Rouge, LA, 1982.

36. Louisiana State Department of Education. Residential Electricity.
Natchitoches, LA: Vocational Curriculum Development and Research
Center, 1980.

37. Winson, William and Dolciani, Mary. Modern Algebra, Book 1. Boston:
Houghton-Mifflin, 1973.