

# IEEE DISTINGUISHED LECTURER PROGRAM



## Connecting Space Assets to the Internet: Challenges and Solutions

IEEE Day and Distinguished Lecture to  
Austin ComSoc/SP/CtSoc and Computer/EMBS joint chapters

**Dr. Mohammed Atiquzzaman**

Presidential Professor

School of Computer Science

University of Oklahoma, Norman, OK 73019-6151, USA.

[atiq@ou.edu](mailto:atiq@ou.edu), [www.cs.ou.edu/~atiq](http://www.cs.ou.edu/~atiq)

Oct 4, 2020





# Advantages of Satellites over Terrestrial Networks



- Ubiquitous coverage and is usually more reliable, especially in remote and underserved regions.
  - Communicating entities/IoT/Smart objects are often
    - remote
    - dispersed over a wide geographical area
    - inaccessible
- Satellite-based applications for global coverage.




- Satellite permits the use of a single platform, as compared to a patchwork of terrestrial networks.



## IoT over Satellite Growth

- Cisco expects more than 50 billion connected devices by 2020
- Higher numbers of sensors being implemented and monitored, with each requiring their own IoT connection.

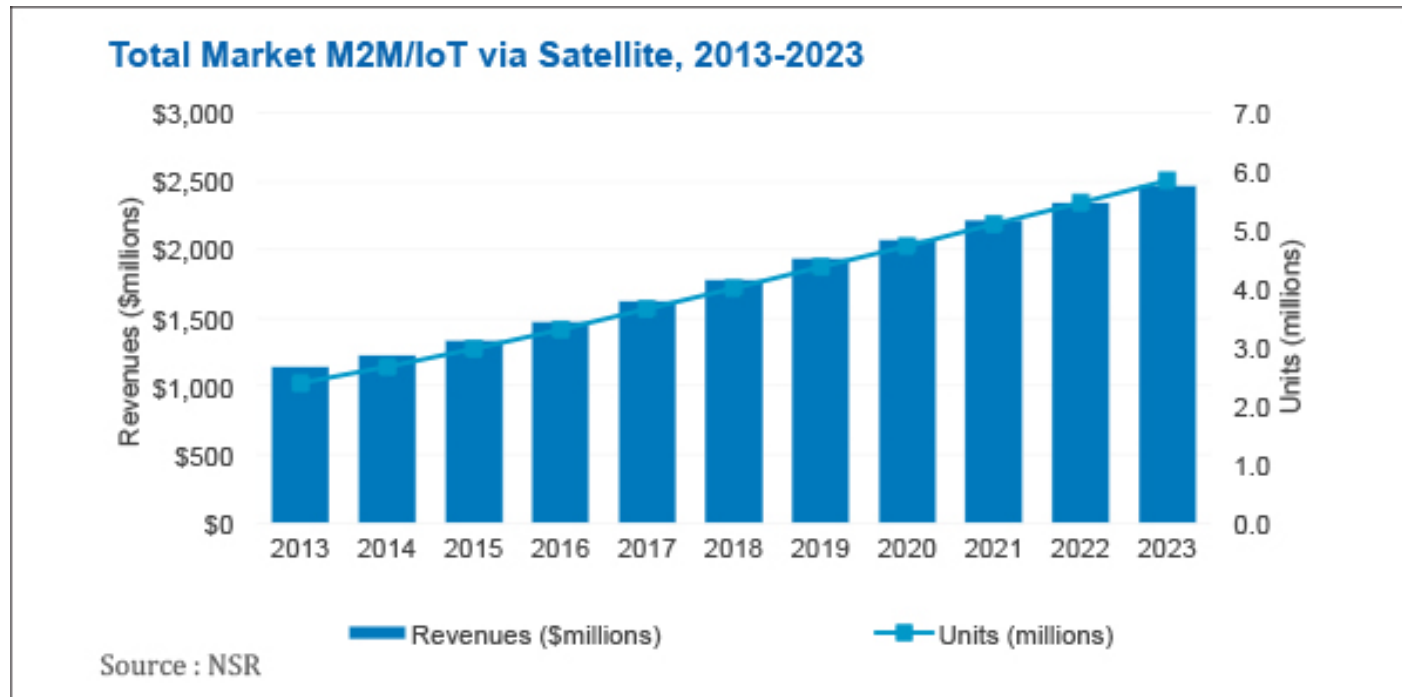

- Terrestrial networks currently dominate, but IoT via satellite will experience strong growth over the next decade.



# Juno Payload System Overview

Jovian Auroral Distributions Experiment (JADE)



JAD of e and

Jupi Dete

JEDI is and an

Ultravi

UVS is an ultraviolet




Gravity Science (GS)

The Juno Gravity Science Investigation will probe the mass properties of Jupiter by using the communication subsystem to perform Doppler tracking.

Magnetometer (MAG)

Advanced Stellar Compass (ASC)

ASC accurately measures the orientation of the magnetometers.



FGM)

de onment.



nt

d e.

It's possible to connect the on-board science equipment to the Internet

JunoCam will provide visible-color images of the Jovian cloud tops.

JIRAM will acquire infrared images and spectra of Jupiter. JIRAM is located on the aft/bottom deck.



- Spacecrafts can have IP-addressable payload/devices/‘things’

- Sensor
- Radars
- Telescopes

We consider Low Earth Orbiting

- T
- g
- T



35,838 km

- Connecting mobile space devices to the Internet requires mobility management.




## ■ Link Layer Handoff

- Inter-satellite handoff
- Link handoff
- Spotbeam handoff

## ■ Network Layer Handoff


- Satellite as a router
- Satellite as a mobile host

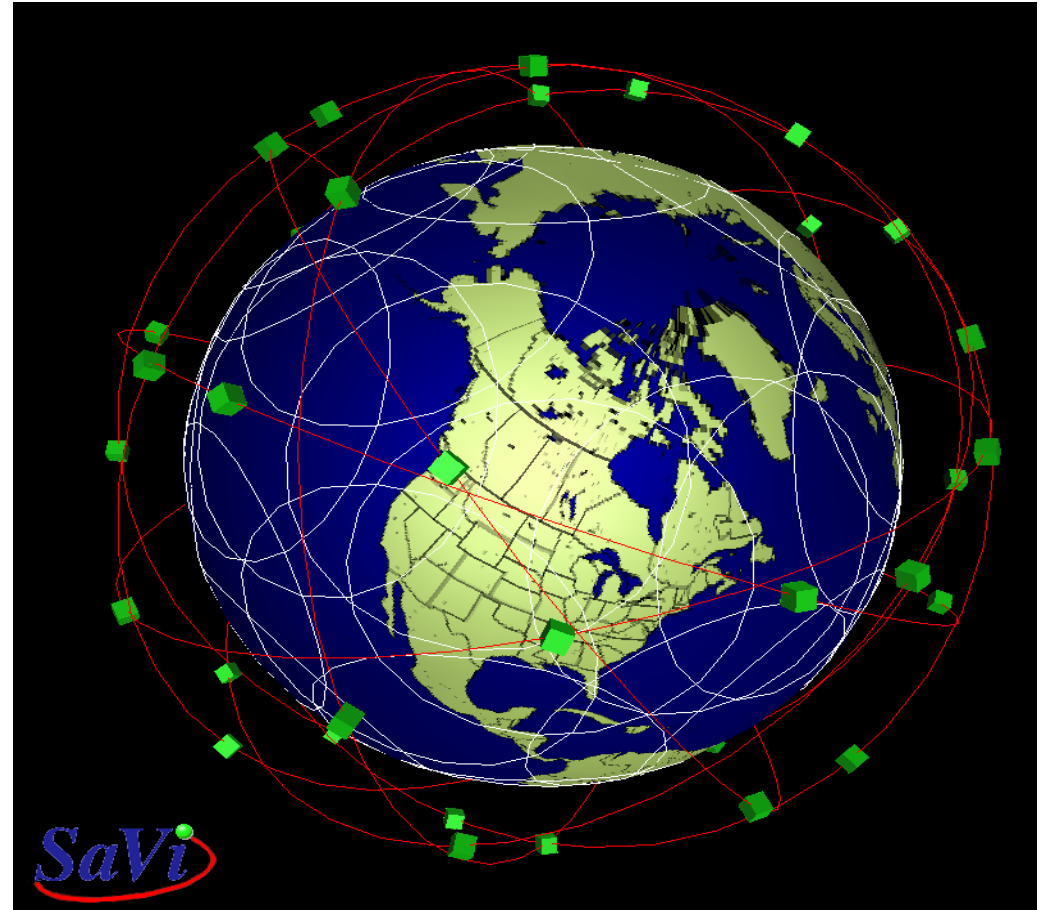

*A Globalstar design, with 48 active satellites in 8 planes of 6.*




- Satellite movement causes handoff between ground stations.
- Similar to inter-switch handoff in the case of terrestrial mobile network.

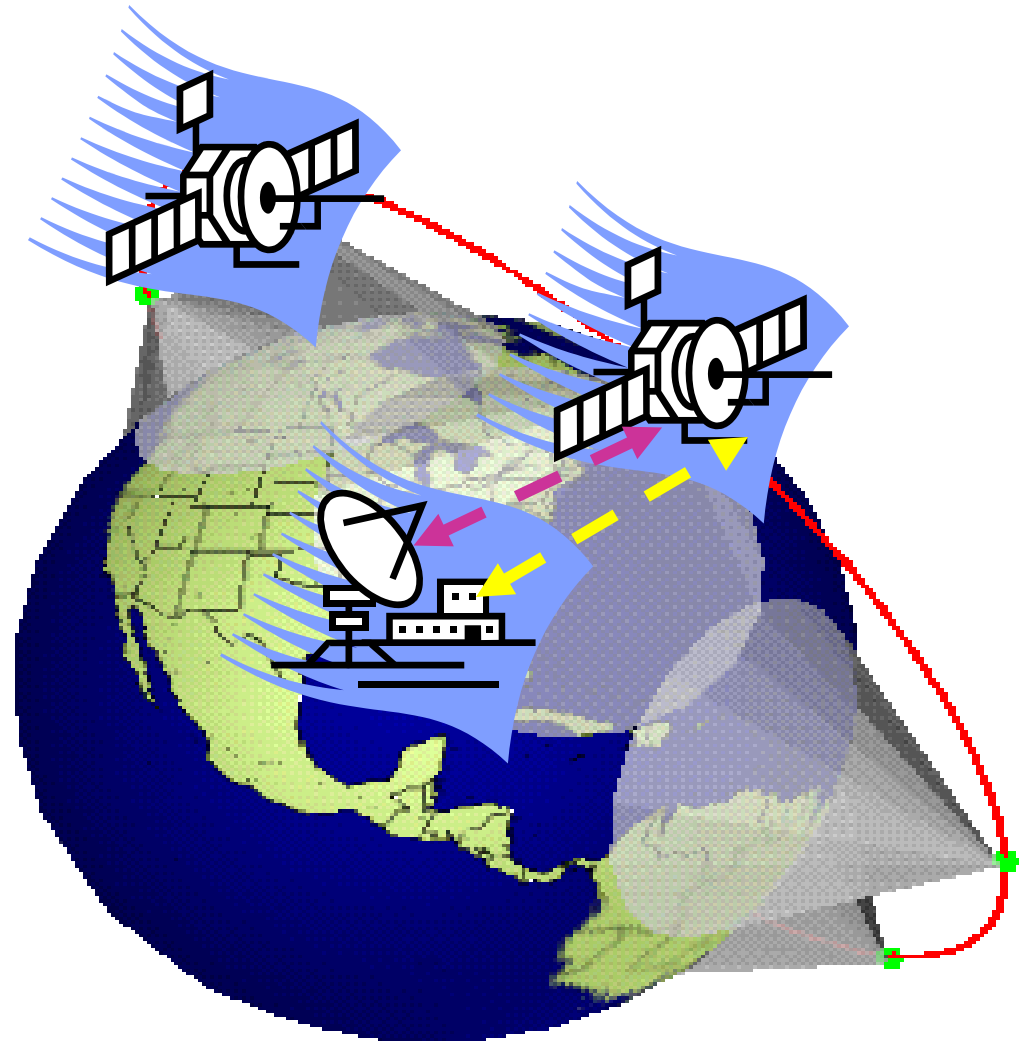



- Satellites act as IP routing devices.
  - No on-board device is generating or consuming data
- Satellites are allocated different IP prefix.
- Host need to maintain continuous connection with Remote Computer.

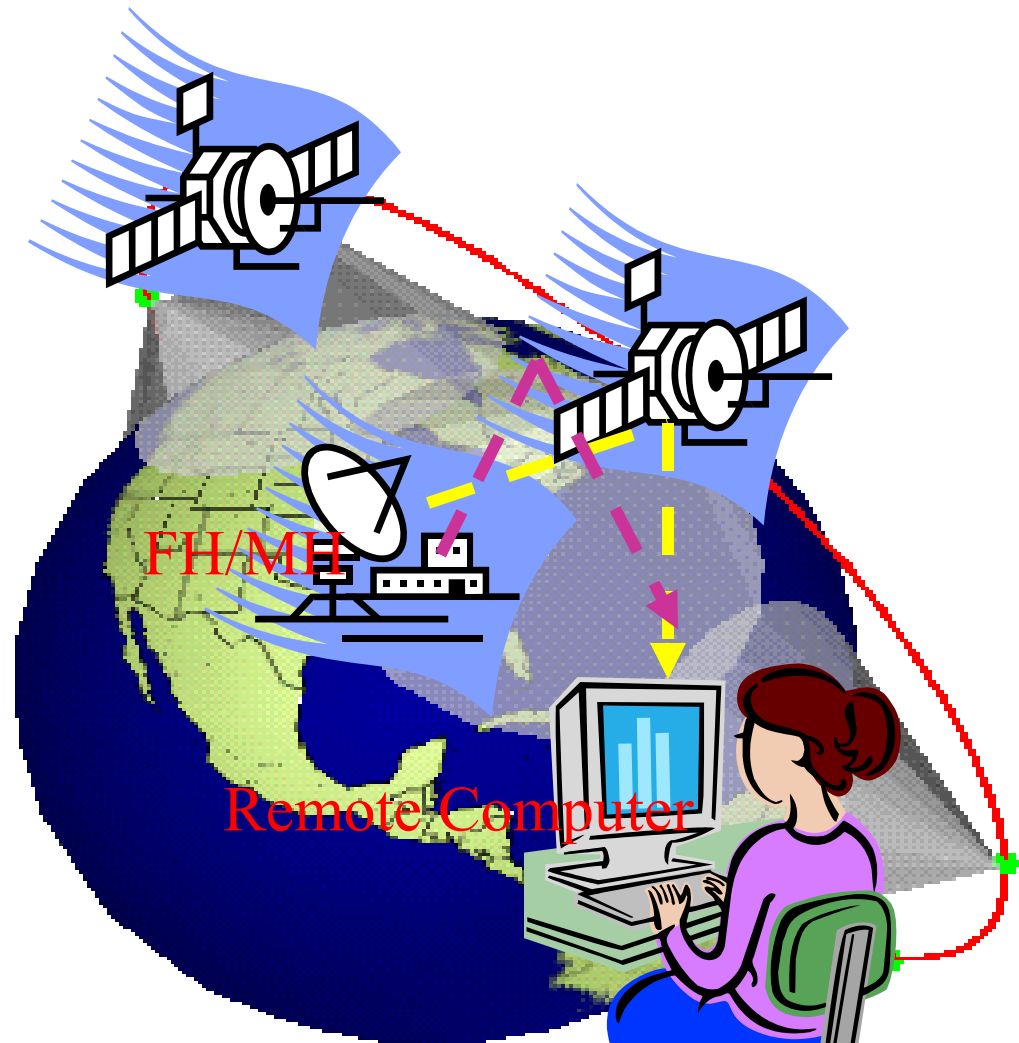






- Onboard equipment generate data and act as the endpoint of the communication.


- I  
g

- C  
allocated different IP prefix.

- Satellite need to maintain continuous connection with remote computer.

# Lots of Handoff in Space

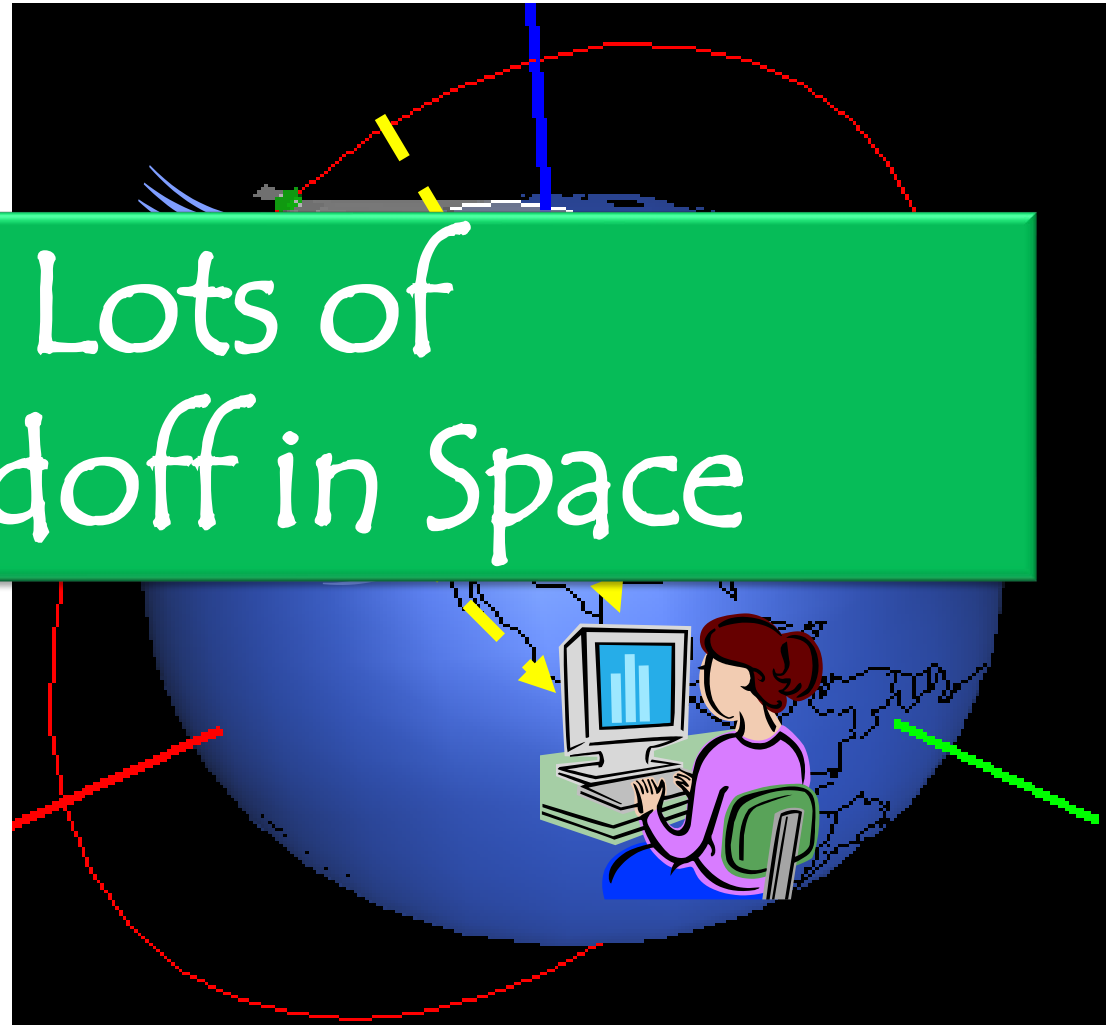



# Mobility Management



# US Postal System Mail Forwarding



**OFFICIAL MAIL FORWARDING CHANGE OF ADDRESS ORDER**

Please PRINT items 1-10 in blue or black ink. Your signature is required in item 9.

**1. Change of Address for:** (Read Attached Instructions)  
 Individual (#5)     Entire Family (#5)     Business (#6)

**2. Is This Move Temporary?**    Yes     No

**3. Start Date:** (ex. 02/01/11)    011212<sup>4</sup>    <sup>4</sup> If TEMPORARY move, print date to discontinue forwarding: (ex. 03/27/11)

**5a. LAST Name & Jr./Sr./etc.**    DOE

**5b. FIRST Name and MI**    JOHN

**6. If BUSINESS Move, Print Business Name**

**OFFICIAL USE ONLY**

Zone/Route ID No.    | | | | |

Date Entered on Form 3882  
M M D D Y Y    | | | | |

Expiration Date  
M M D D Y Y    | | | | |

Clerk/Carrier Endorsement  
|

**PRINT OLD MAILING ADDRESS BELOW: HOUSE/BUILDING NUMBER AND STREET NAME (INCLUDE ST., AVE., CT., ETC.) OR PO BOX**

**7a. OLD Mailing Address**    95 MORTON ST 1ST FLOOR

**7b. For Puerto Rico Only:** If address is in PR, print urbanization name, if appropriate.

**7c. OLD CITY**    NEW YORK    **7d. State**    NY    **7e. ZIP**    11014

**PRINT NEW MAILING ADDRESS BELOW: HOUSE/BUILDING NUMBER AND STREET NAME (INCLUDE ST., AVE., CT., ETC.) OR PO BOX**

**8a. NEW Mailing Address**    123 ENG 2ND PLT - B CO

**8b. For Puerto Rico Only:** If address is in PR, print urbanization name, if appropriate.

**8c. NEW CITY**    APO    **8d. State**    AE    **8e. ZIP**    09398

**9. Print and Sign Name (see conditions on reverse)**


Print: John Doe

Sign: X

**10. Date Signed:** (ex. 01/22/11)    011212

**OFFICIAL USE ONLY**

PS FORM 3875 APRIL 2011    Visit [usps.com](http://usps.com) to change your address online or call 1-800-ASK-USPS (1-800-275-8777)    431B






1. When Mobile Host moves to a new domain, a location update is sent to Home Agent.

2 & 3. Packets from CN to Mobile Host are encapsulated and forwarded to MH's current care-of address.

4. Packets are decapsulated and delivered to upper layer protocol.

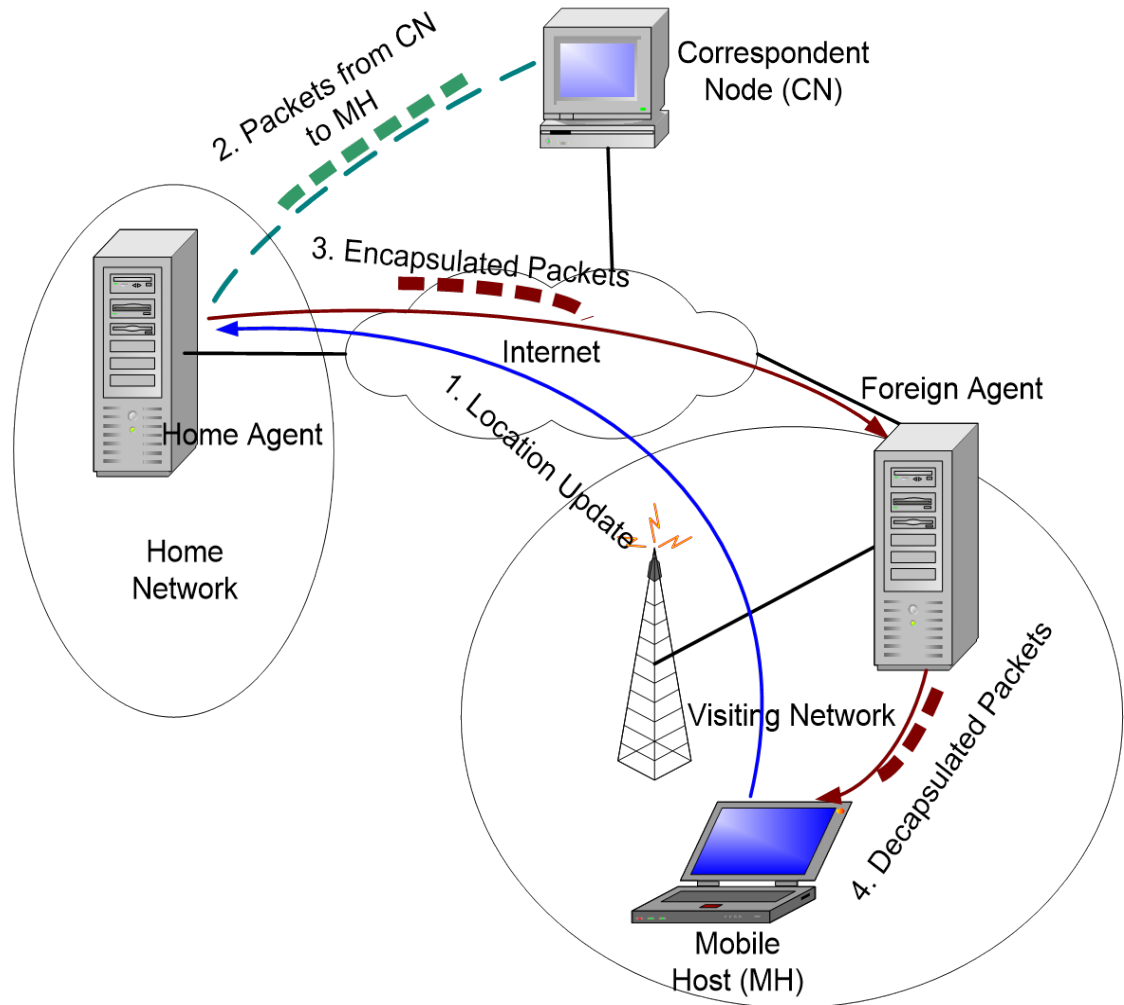




# Main Drawbacks of base Mobile IP



- Need modification to Internet infrastructure.
- High handoff latency and packet loss rate.
- Inefficient routing path.
- Conflict with network security solutions such as Ingress Filtering and Firewalls.
- Home Agent must reside in MH's home network, making it hard to duplicate HA to various locations to increase survivability and manageability.

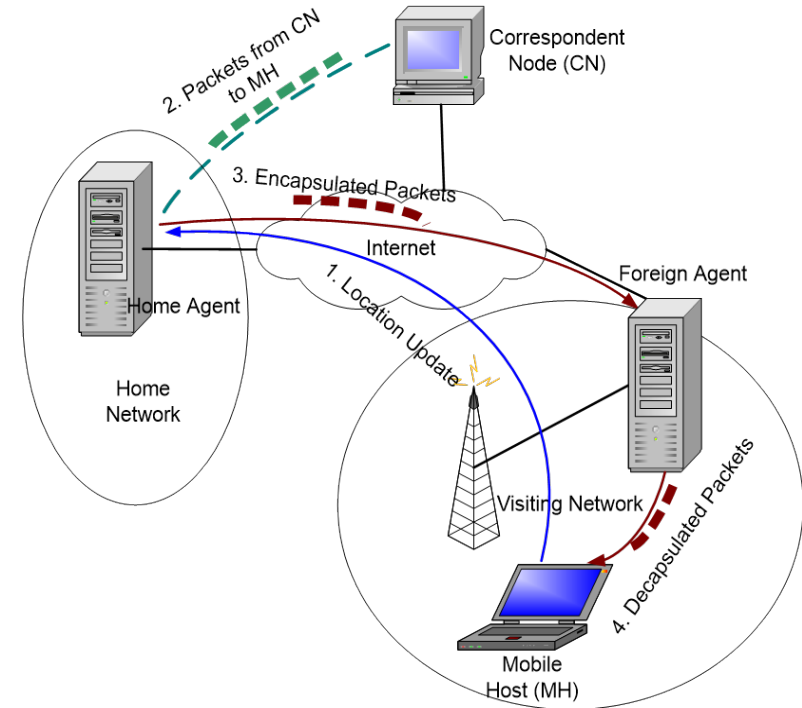





## Several NASA projects considering IP in space and Mobile IP

- *Global Precipitations Measurement (GPM)*
- *Communication and Navigation Demonstration on Shuttle (CANDOS)*
- Operating Missions as Nodes on the Internet (OMNI)
- NASA worked with Cisco to develop a Mobile router

## Mobile IP is promising for major role in various space related NASA projects

- Advanced Aeronautics Transportation Technology (AATT)
- *Weather Information Communication (WINCOMM)*
- Small Aircraft Transportation Systems (SATS)

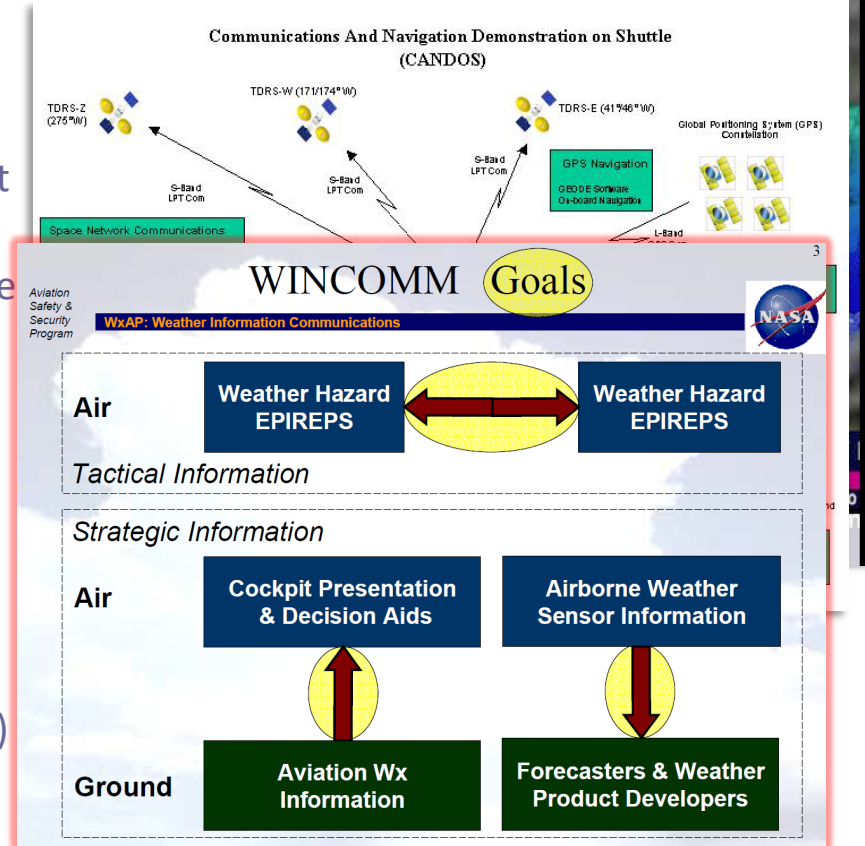

Develop an efficient, secure and seamless handoff scheme which would be applicable to both the satellite and wireless/cellular environment.



# Motivation for a New Mobility Management Protocol in Space



- No need to install new hardware or software component in Internet infrastructure.
- Low handoff latency and packet loss rate.
- Efficient data path
  - Avoid triangular routing.
- Cooperate with existing network security mechanisms.
- Increased survivability, scalability and manageability.
- Suitable for satellite IP handoffs.

**Main Drawbacks of base Mobile IP**

- Need modification to Internet infrastructure.
- High handoff latency and packet loss rate.
- Inefficient routing path.
- Conflict with network security solutions such as Ingress Filtering and Firewalls.
- Home Agent must reside in MH's home network, making it hard to duplicate HA to various locations to increase survivability and manageability.

Mohammed Atiquzzaman, University of Oklahoma

36



# SIGMA: Seamless IP-diversity based Generalized Mobility Architecture






- Decouple location management from handoff
- Carry out location management and handoff in parallel to data transmission
- Allow the layer whose performance is to be optimized to take responsibility of the handoff
- Implementation:
  - Multihoming for simultaneous communication with multiple access points.
  - Stream Control Transmission Protocol (RFC 2960).



- Mobile IP assumes the upper layer protocol uses only **one IP address** to identify a logical connection. Some buffering or re-routing should be done at the router for seamless handover.
- Sctp support **multiple IP addresses** at transport layer naturally via multi-homing.
- When a mobile host moves between cells, it can setup a new path to communicate with the remote computer while still maintaining the old path.

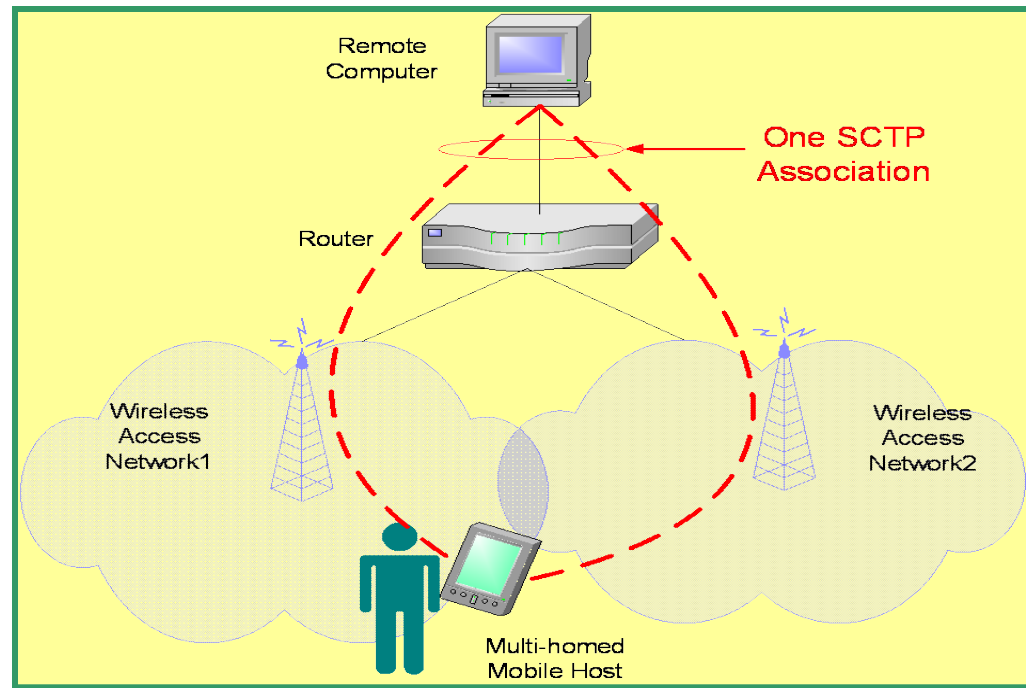

## Advantages of SIGMA:

- Reduced packet loss and handover latency
- Increased throughput
- No special requirement on Router and Access networks.



## What is SCTP?

- SCTP: “Stream Control Transmission Protocol”
- Originally designed to support SS7 signaling messages over IP networks. Currently supports most of the features of TCP
- Standardized by IETF RFC 2960
- Reliable transport protocol on top of IP

## TCP and SCTP compared

- Both of them are reliable transport protocols;
- Similar Congestion Control algorithms (slow start, congestion avoidance);
- SCTP has two new features:
  - Multihoming
  - Multistreaming


Upper layer applications

TCP, UDP, **SCTP**

IP

Link Layer

Physical Layer

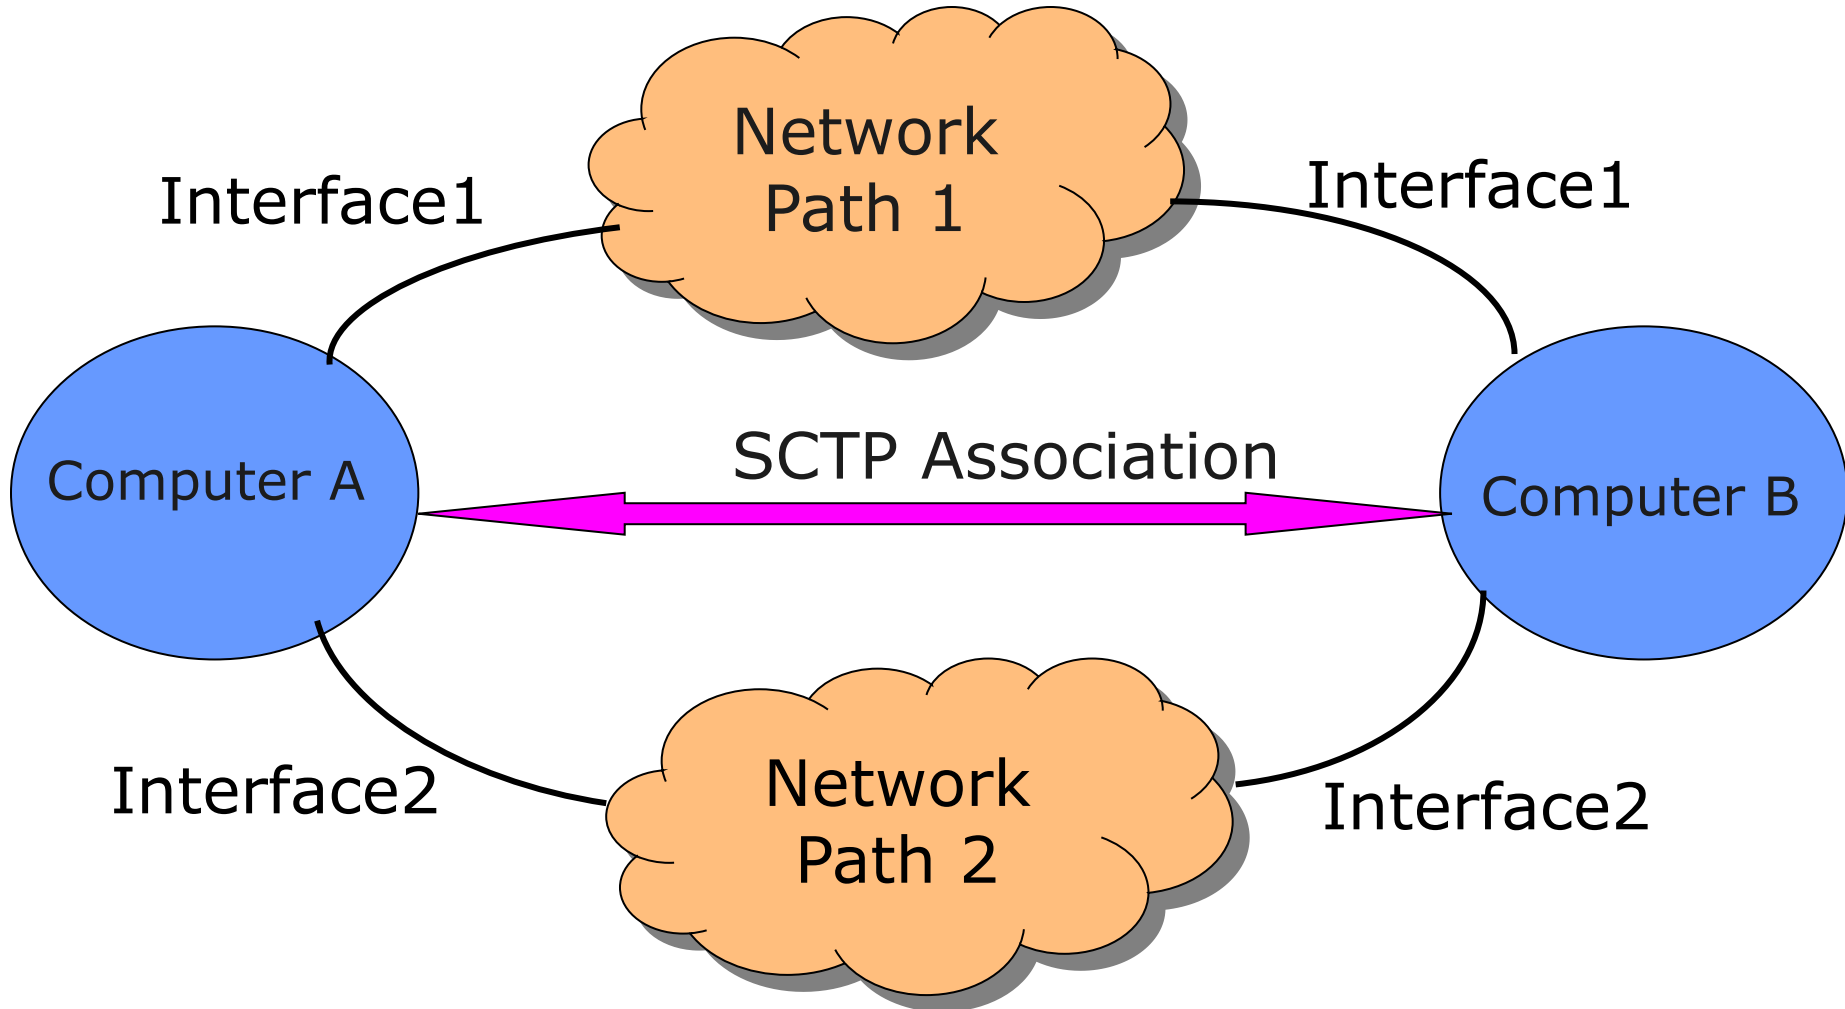



# Signaling



1. Satellite obtains a new IP address in new domain.
2. Satellite notify remote computer about the new IP address.
3. Satellite let remote computer set primary address to new IP address.
4. Update Location Manager.
5. Delete or deactivate old IP address.






# Vertical Handoff




- Different access network technologies are integrating with each other to give mobile user a transparent view of Internet.
- Handover is no longer only limited to between two subnets in WLAN or between two cells in cellular network (**horizontal handover**).
- Mobile users are expecting seamless handover between different access networks (**vertical handover**).
- The mobility based on SCTP multi-homing is a feasible approach to meet the requirement of vertical handover.

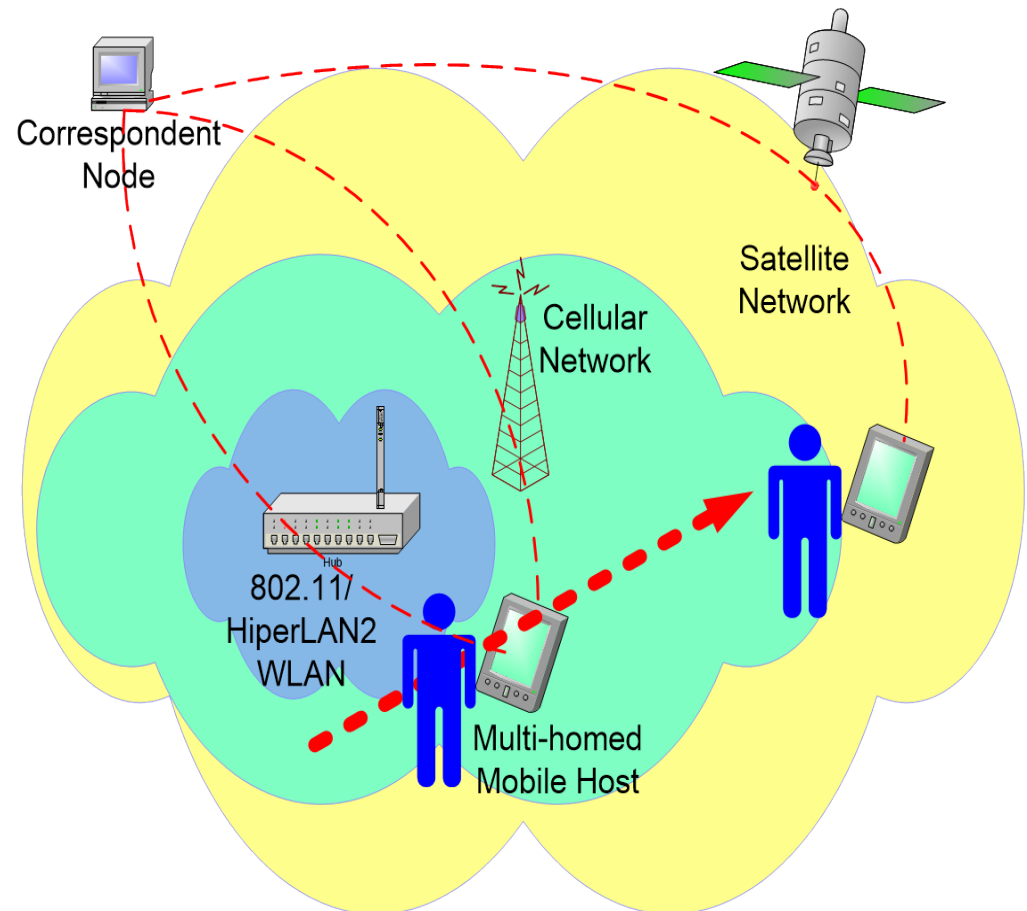





# Experimental Testbed

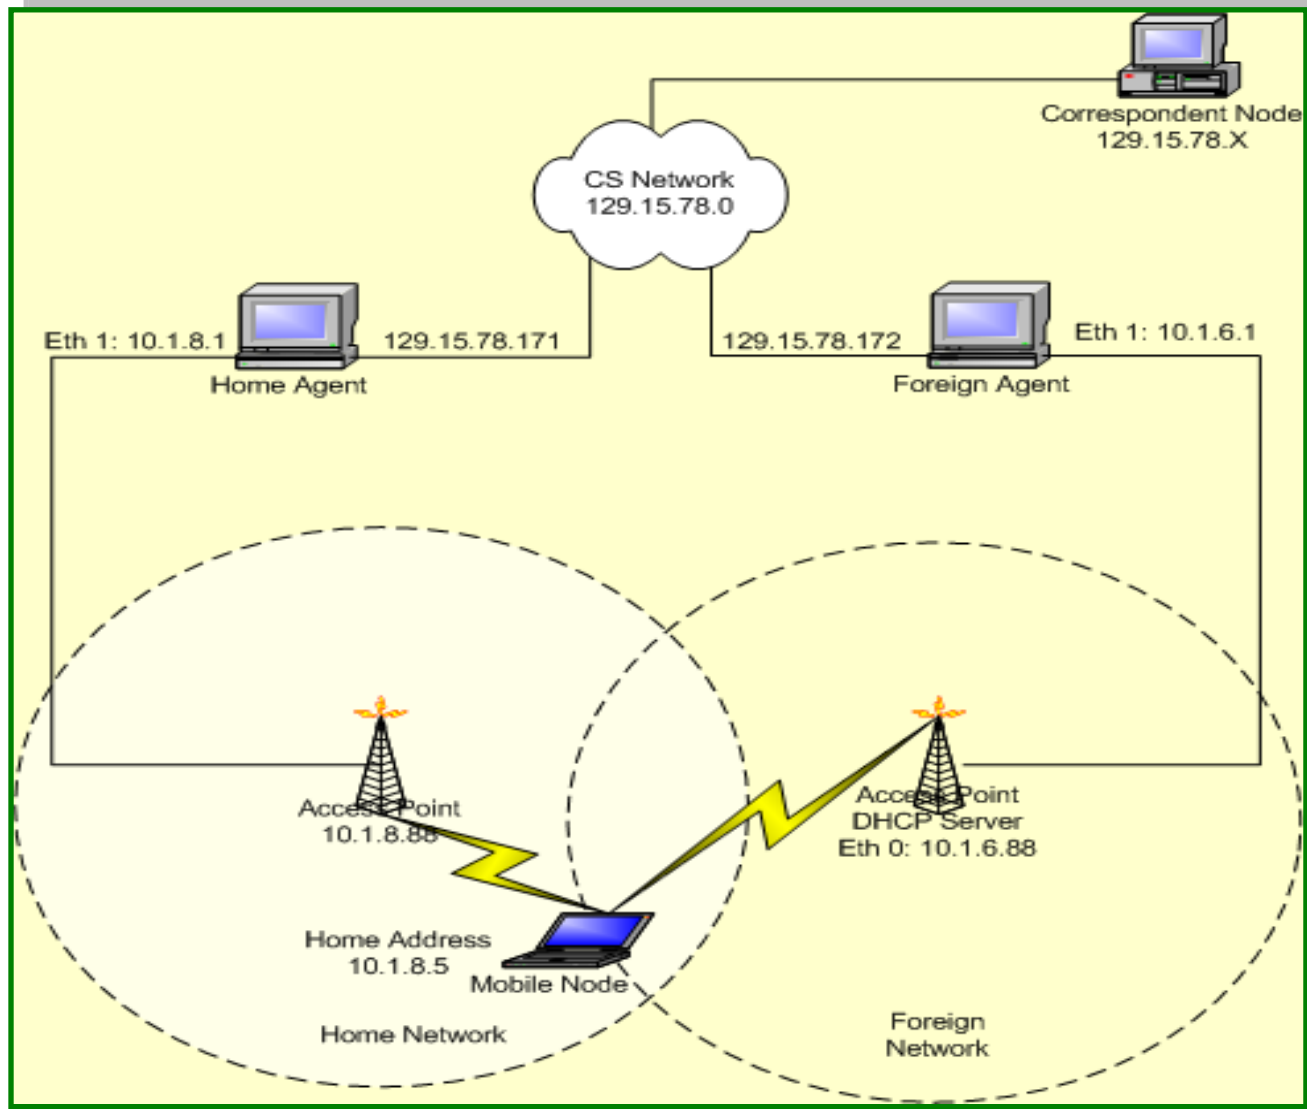




## Operation of SIGMA Testbed


- Link Layer is monitored to detect new AP signal strength.
- When a new AP is detected a new IP address is added to the association.
- When the new AP signal becomes stronger than the old AP signal, the Mobile Node notifies the Correspondent Node to make the new address the primary.


- Iksctp reference implementation.
- Linux OS – Kernel 2.6.2.
- Network adapters
  - Avaya PCMCIA wireless network card and a NETGEAR USB wireless network card.

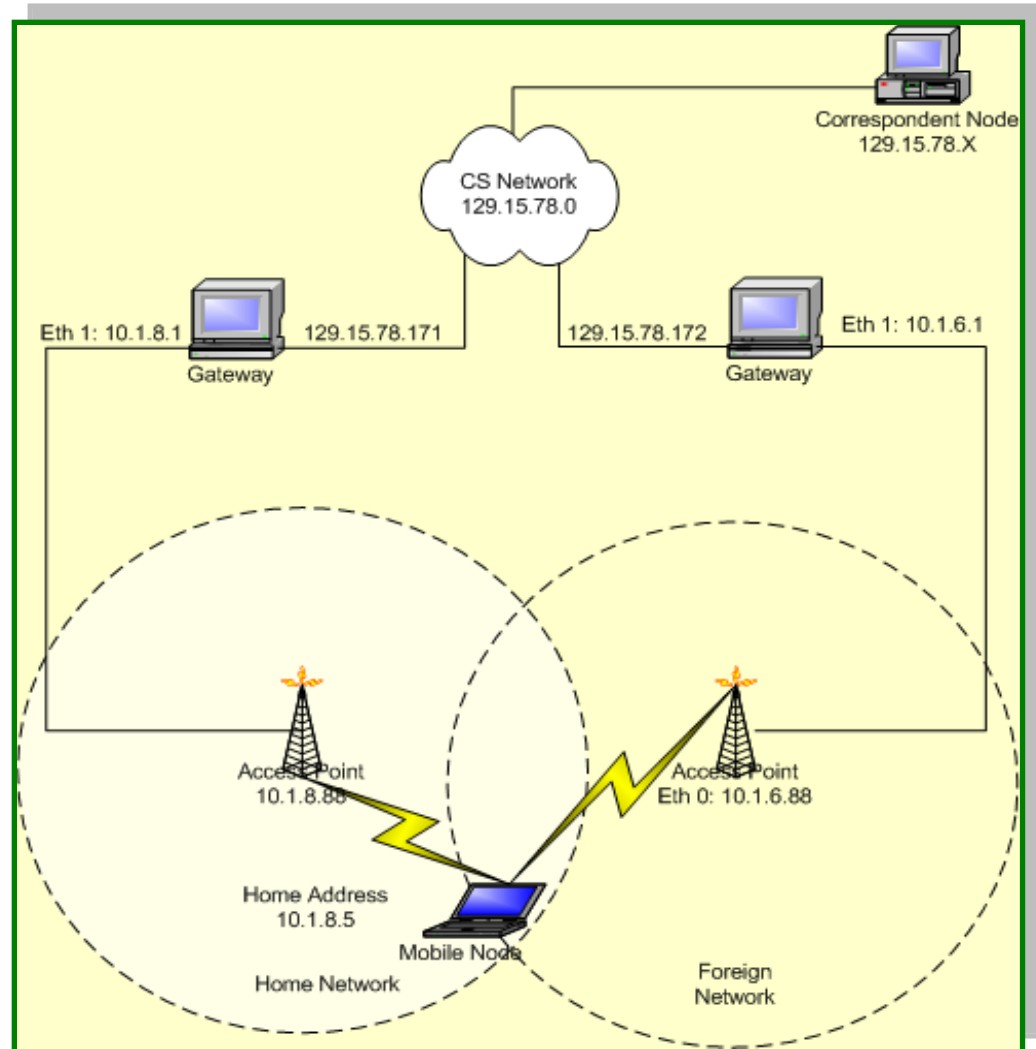




# Results

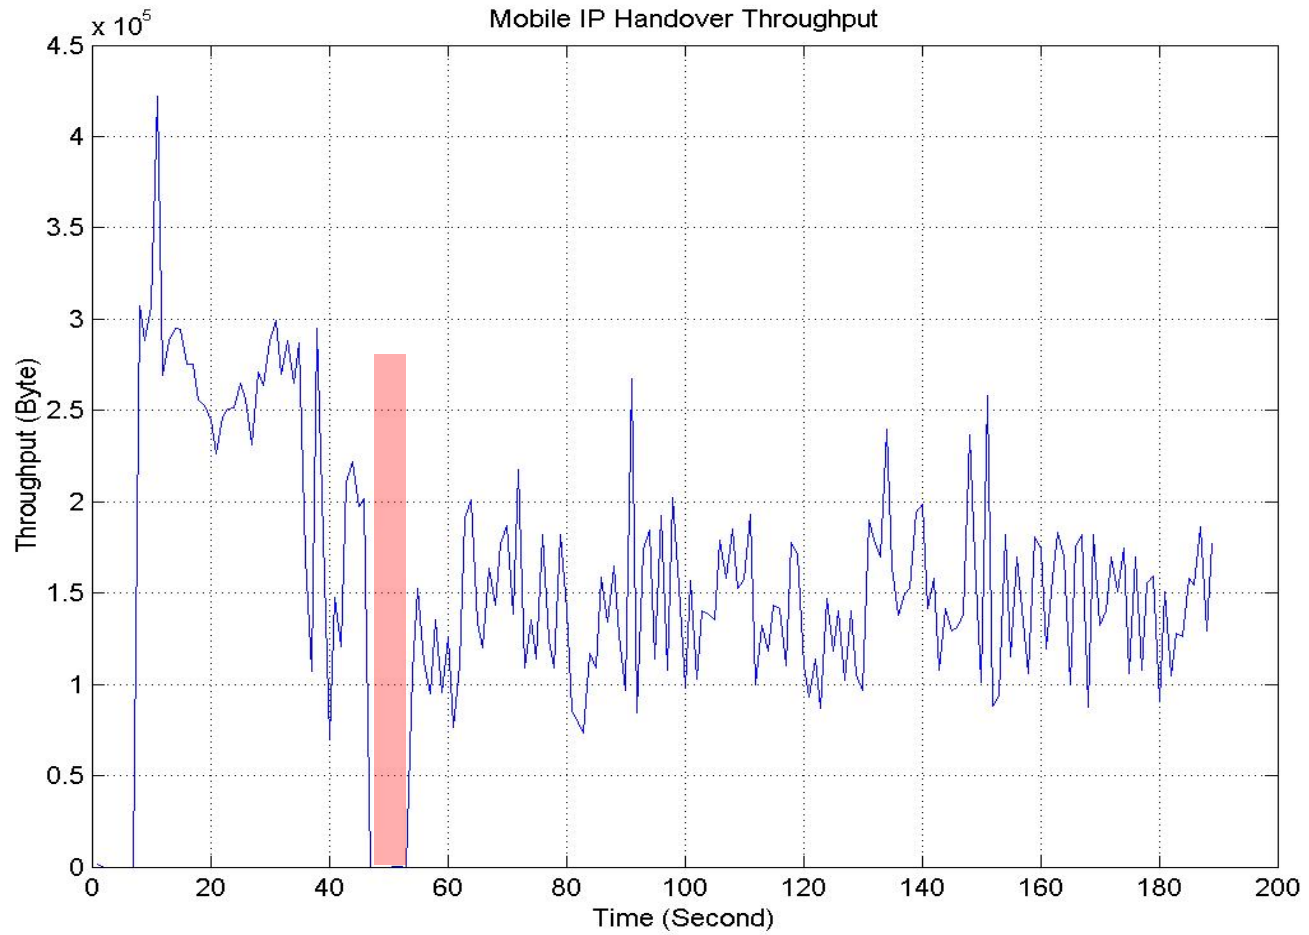

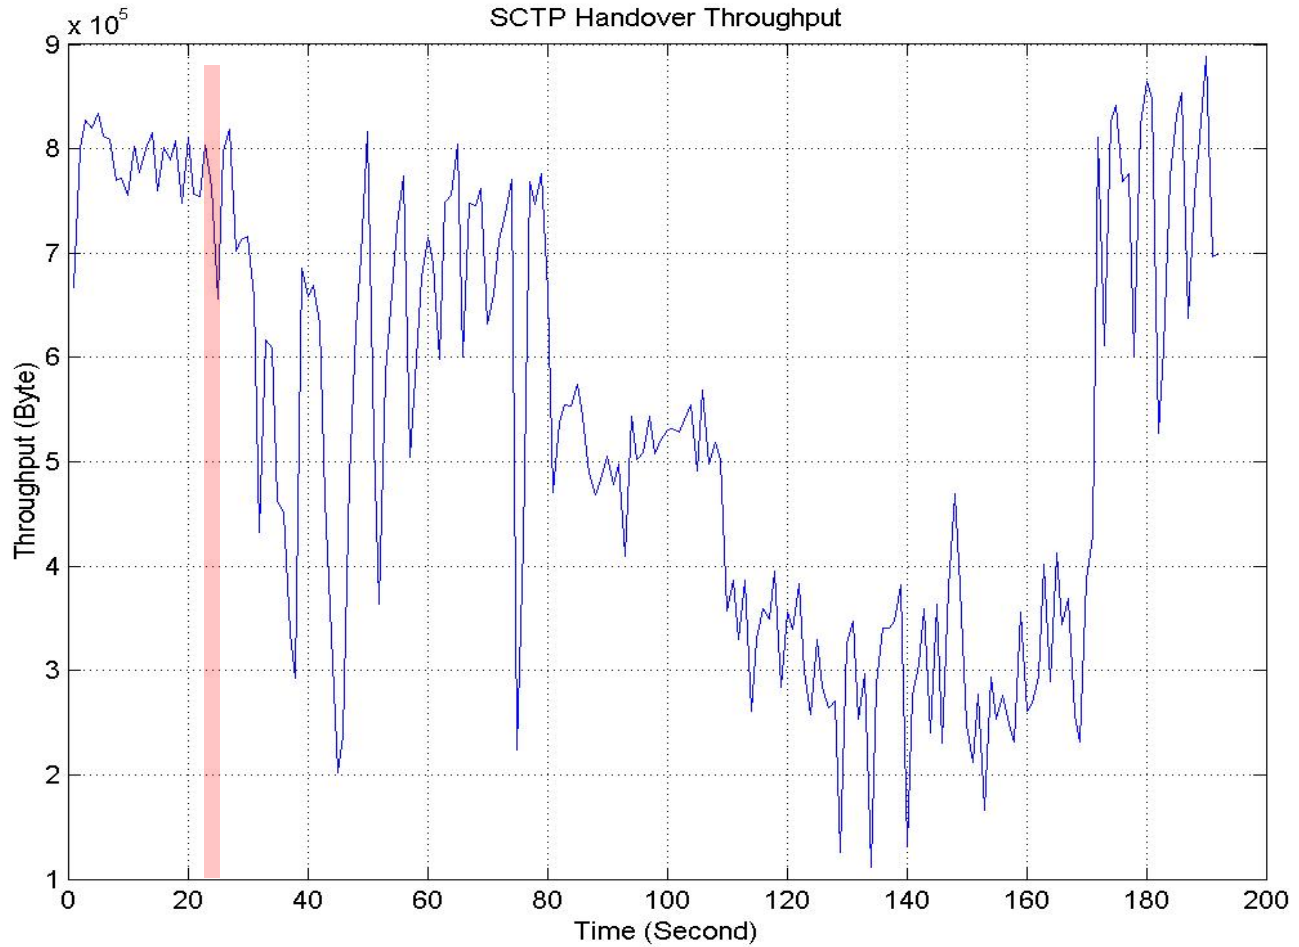



# NASA/DOD Technology Readiness Level

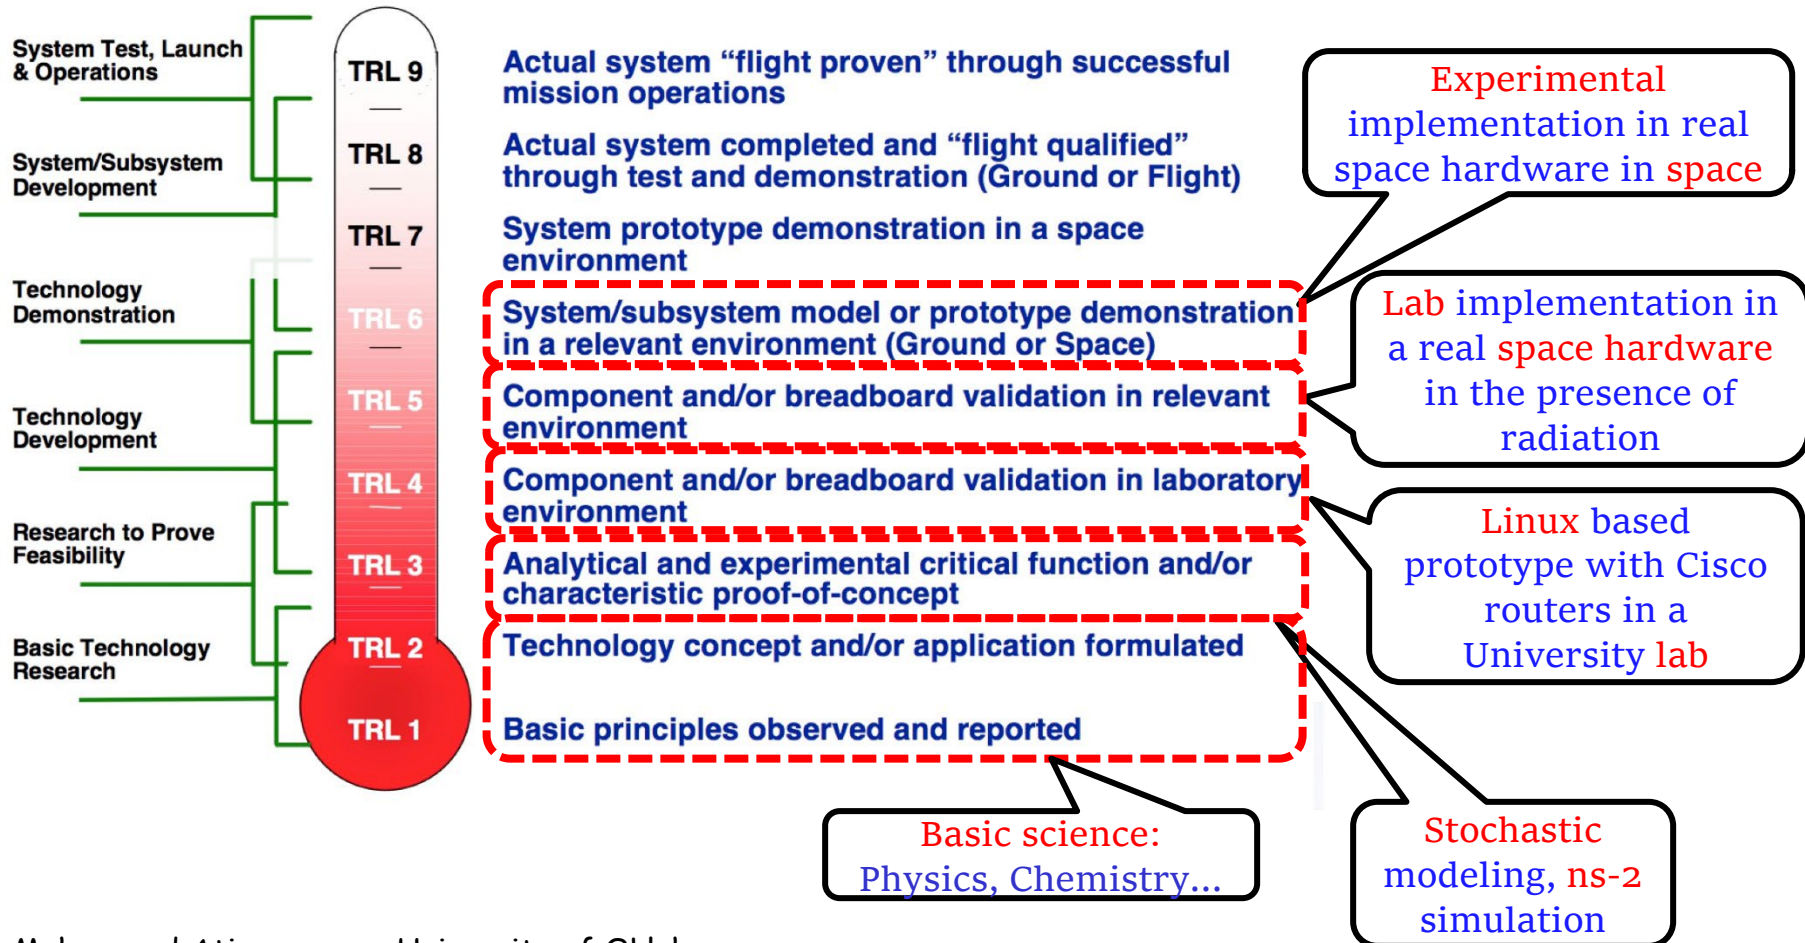



Very Limited on-board Computing Resources

PowerPC processor

RTEMS Operating System

Very limited memory

- Surrey Satellite Technologies Ltd.
- Disaster Monitoring constellation





- Satellite is a critical component for GLOBAL COVERAGE
- Many mobility issues arise due to movement of “satellites”.
  - Efficient mobility management schemes for satellites is an important topic for future research.
- Pay attention to TARGET SYSTEM before developing protocols for mission critical systems.



- National Aeronautics and Space Administration (NASA) and Cisco for funding of this project
- The following people are participating/participated in the design, development and testing of SIGMA and SINEMO
  - Shaojian Fu (Opnet)
  - Yong-Jin Lee (Korea National University of Education)
  - Justin Jones (Riskmetrics)
  - Suren Sivagurunathan (Yousendit)
  - Abu Sayeem Reaz (Univ. of California, Davis)
  - Abu Shahriar (Univ. of Oklahoma)
  - Md. Shohrab Hossain (BUET, Bangladesh)
  - William Ivancic (NASA)
  - Wesley Eddy (NASA)
  - David Stewart (NASA)
  - Lloyd Wood (Cisco)

Further information: [atiq@ou.edu](mailto:atiq@ou.edu)

[www.cs.ou.edu/~atiq](http://www.cs.ou.edu/~atiq)



# Thank you

Contact info

Mohammed Atiquzzaman

[atiq@ou.edu](mailto:atiq@ou.edu)

(405) 325 8077

[www.cs.ou.edu/~atiq](http://www.cs.ou.edu/~atiq)

