

IEEE STANDARDS ASSOCIATION



IEEE-SA Industry Connections Report

Wired/Wireless Use Cases and Communication Requirements for Flexible Factories IoT Bridged Network



IEEE | 3 Park Avenue | New York, NY 10016-5997 | USA

DRAFT

Wired/Wireless Use Cases and Communication Requirements for Flexible Factories IoT Bridged Network

Editor

Name	Affiliation
Zein, Nader	NEC Europe Ltd.(NLE GmbH)

Contributors/Supporters

Name	Affiliation
Hasegawa, Akio	Advanced Telecommunications Research Institute International (ATR)
Kondo, Yoshihisa	Advanced Telecommunications Research Institute International (ATR)
Hasegawa, Jun	Fujitsu Kansai-Chubu Net-Tech Limited
Naitou, Syouji	Fujitsu Kansai-Chubu Net-Tech Limited
Hamaminato, Makoto	Fujitsu Laboratories Ltd.
Nishikawa, Takurou	Fujitsu Limited
Sato, Shinichi	Fujitsu Limited
Wang, Hao	Fujitsu R&D Center Co., Ltd
Su, Yi	Fujitsu R&D Center Co., Ltd.
Kato, Toshio	Mobile Techno Corp.
Murata, Syuuichi	Mobile Techno Corp.
Yoshimura, Masahiro	Mobile Techno Corp.
Tomita, Hisanori	Murata Machinery, Ltd.

Itaya, Satoko	National Institute of Information and Communications Technology (NICT)
Kojima, Fumihide	National Institute of Information and Communications Technology (NICT)
Koto, Hajime	National Institute of Information and Communications Technology (NICT)
Mochinaga, Mika	National Institute of Information and Communications Technology (NICT)
Ohori, Fumiko	National Institute of Information and Communications Technology (NICT)
Ohsawa, Tomoki	National Institute of Information and Communications Technology (NICT)
Hirabayashi, Chiaki	NEC Communication Systems, Ltd.
Ikenoue, Yuichi	NEC Communication Systems, Ltd.
Hayashi, Takeshi	NEC Corporation
Hidaka, Youichi	NEC Corporation
Inoue, Takamichi	NEC Corporation
Kato, Rintaro	NEC Corporation
Kobayashi, Tsukasa	NEC Corporation
Maruhashi, Kenichi	NEC Corporation
Nakajima, Taketoshi	NEC Corporation
Okayama, Yoshimitsu	NEC Corporation
Osuga, Toru	NEC Corporation
Zein, Nader	NEC Europe Ltd.(NLE GmbH)
Fujimoto, Takuya	OMRON Corporation
Ikumo, Masahiro	OMRON Corporation
Saito, Keisuke	OMRON Corporation
Yamada, Ryota	OMRON Corporation
Ohue, Hiroshi	Panasonic Corporation
Amagai, Akihiro	Sanritz Automation Co., Ltd.



Trademarks and Disclaimers

IEEE believes the information in this publication is accurate as of its publication date; such information is subject to change without notice. IEEE is not responsible for any inadvertent errors.

*The Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue, New York, NY 10016-5997, USA*

*Copyright © 20xx by The Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published Month 20xx. Printed in the United States of America.*

IEEE is a registered trademark in the U. S. Patent & Trademark Office, owned by The Institute of Electrical and Electronics Engineers, Incorporated.

PDF: ISBN 978-0-7381-xxxx-x STDVxxxxx
Print: ISBN 978-0-7381-xxxx-x STDPDVxxxxx

*IEEE prohibits discrimination, harassment, and bullying. For more information, visit
<http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>*

No part of this publication may be reproduced in any form, in an electronic retrieval system, or otherwise, without the prior written permission of the publisher.

*To order IEEE Press Publications, call 1-800-678-IEEE.
Find IEEE standards and standards-related product listings at: <http://standards.ieee.org>*

Notice and Disclaimer of Liability Concerning the Use of IEEE-SA Industry Connections Documents

This IEEE Standards Association (“IEEE-SA”) Industry Connections publication (“Work”) is not a consensus standard document. Specifically, this document is NOT AN IEEE STANDARD. Information contained in this Work has been created by, or obtained from, sources believed to be reliable, and reviewed by members of the IEEE-SA Industry Connections activity that produced this Work. IEEE and the IEEE-SA Industry Connections activity members expressly disclaim all warranties (express, implied, and statutory) related to this Work, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; quality, accuracy, effectiveness, currency, or completeness of the Work or content within the Work. In addition, IEEE and the IEEE-SA Industry Connections activity members disclaim any and all conditions relating to: results; and workmanlike effort. This IEEE-SA Industry Connections document is supplied “AS IS” and “WITH ALL FAULTS.”

Although the IEEE-SA Industry Connections activity members who have created this Work believe that the information and guidance given in this Work serve as an enhancement to users, all persons must rely upon their own skill and judgment when making use of it. IN NO EVENT SHALL IEEE OR IEEE-SA INDUSTRY CONNECTIONS ACTIVITY MEMBERS BE LIABLE FOR ANY ERRORS OR OMISSIONS OR DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS WORK, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Further, information contained in this Work may be protected by intellectual property rights held by third parties or organizations, and the use of this information may require the user to negotiate with any such rights holders in order to legally acquire the rights to do so, and such rights holders may refuse to grant such rights. Attention is also called to the possibility that implementation of any or all of this Work may require use of subject matter covered by patent rights. By publication of this Work, no position is taken by the IEEE with respect to the existence or validity of any patent rights in connection therewith. The IEEE is not responsible for identifying patent rights for which a license may be required, or for conducting inquiries into the legal validity or scope of patents claims. Users are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. No commitment to grant licenses under patent rights on a reasonable or non-discriminatory basis has been sought or received from any rights holder. The policies and procedures under which this document was created can be viewed at <http://standards.ieee.org/about/sasb/iccom/>.

This Work is published with the understanding that IEEE and the IEEE-SA Industry Connections activity members are supplying information through this Work, not attempting to render engineering or other professional services. If such services are required, the assistance of an appropriate professional should be sought. IEEE is not responsible for the statements and opinions advanced in this Work.

CONTENTS

EDITOR..... I

CONTRIBUTORS/SUPPORTERS..... I

INTRODUCTION 1

Scope.....2

Purpose2

FACTORY OVERVIEW AND OPERATION ENVIRONMENT 2

Factory communication network environment2

Coordination System for Factory Automation4

Radio Environment within Factories4

 (a) The Severe Environment for Wireless Communications.....4

 (b) Uncoordinated and Independent Systems6

WIRELESS APPLICATIONS AND COMMUNICATION REQUIREMENTS 9

..... 9

Scope of wireless applications in factory.....9

Wireless applications.....9

Communication requirements 10

Details of wireless application and communication requirements 12

FACTORY USAGE SCENARIOS..... 18

Usage scenarios example: Metal processing site 18

Usage scenarios example: Mechanical assembly site 19

Usage scenarios example: Elevated and high temperature work site.... 21

Usage scenarios example: Logistics warehouse site 22

**TECHNOLOGICAL ENHANCEMENT OF NETWORKING FOR FLEXIBLE
FACTORY IOT 24**

Concept of architecture 24

Gaps in existing IEEE 802 technologies 24

- Coexisting of wide variety of factory applications with different requirements.....24**
- QoS management for factories.....25**
- Wireless link aggregation designed for redundancy27**
- Adaptation to rapid changes in wireless environments28**
- Competition of wireless systems in unlicensed bands31**

Enhancements of IEEE 802 technologies for the future 32

CONCLUSIONS 36

CITATIONS 36

DRAFT


1 Wired/Wireless Use Cases and 2 Communication Requirements for 3 Flexible Factories IoT Bridged Network

4 Introduction

5 Communication used in factories has until now been mainly wired communication, which has
6 been preferred for its reliability. However, in recent years the shorter times of product
7 development cycles demands greater flexibility in the layout of machines and sequence of
8 processes, and there are increasing expectations for the use of radio links amongst of the sensors
9 and machines used in the manufacturing and factory processes.

10 When considering the network evolution within factories, consideration should take into account
11 legacy manufacturing machine that are in service for many decades.

12 Within factory installations, for the purpose of monitoring operations and preventive
13 maintenance sensors are be attached to machines. According to the survey by Japan's Ministry of
14 Economy, Trade and Industry , lifetime of production machines is generally long and about 10.9%
15 of them have been used for more than 30 years as shown in Figure 1. There may be many old
16 machines, with sensors attached after installation.

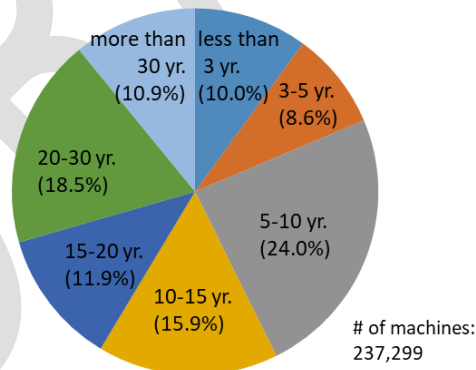

17
18 **Figure 1 Share of production machines by age¹**
19

20 This report is developed under the IEEE 802 Network Enhancements for Next Decade Industry
21 Connections Activity (NEND-ICA). It addresses the integration and bridged wired and wireless IoT
22 communications in the factory environment considering its foreseen evolution that include dense
23 radio devices utilization. The report includes use cases and requirements within the factory
24 wireless environment. presents problems and challenges observed within the factory and

¹ http://www.soumu.go.jp/main_content/000469037.pdf

1 reports on feasibility of some possible solutions for overcoming these issues. Areas that may
2 benefit from standardization are highlighted.

3 The report then presents an underlying End to End network architecture which encompasses the
4 operation and control of the various services in the factory network according to their dynamic
5 QoS requirements. It analyses the applicable standards and features in wired and wireless IEEE
6 802 technologies to achieve the requirements in End-to-End (E2E) network connectivity for
7 integrated wired and wireless connectivity in factory environment.

8

9 **Scope**

10 The scope of this report is to capture current and future network requirements taking into
11 consideration dense use of radio devices and its operation in factory environment. The report
12 presents analysis of issues and challenges identified in maintaining reliable, and time
13 sensitive/constraint deliverable of control messages and data traffic across wired and wireless
14 bridged network within the identified factory environment. Also to present analysis of applicable
15 standards and features in wired and wireless IEEE802 technologies for managing requirements in
16 E2E network connectivity.

17

18 **Purpose**

19 The purpose of this report is to present an overview of issues and challenges in managing a reliable
20 and time sensitive connectivity in E2E wired and wireless network characterized by dense radio
21 devices installation and noisy factory environment. The report will also present technical analyses
22 of the desired features and functions in wired and wireless IEEE802 technologies for managing
23 requirements in E2E network connectivity which can be used in an IEEE 802 standard solution
24 based on time critical requirements for integrated wired and wireless connectivity within the
25 factory environment.

26

27 **Factory Overview and Operation environment**


28 **Factory communication network environment**

29 Recent trends to introduce IoT devices, such as sensors and cameras in the factories are
30 accelerated by strong demand for improving productivity under the constraints of reduced
31 workers in aging population society and pressure for cost reduction. Digitalization of the factories
32 as well as connection of information on production process and supply chain management within
33 a factory and across factories becomes important. It is no doubt that commutation networks will
34 be changing in factories for the next decade.



1 There are several system applications, e.g., preventive maintenance, management of materials
 2 and products, monitoring of movements and machine monitors which are integrated in the
 3 network. Future industrial network for a factory may consist of wired and wireless bridges for the
 4 aforementioned systems. The successful integration of wired and wireless systems is
 5 indispensable and more efforts will be required for wireless communication because of its limited
 6 and shared radio resources and the sensitive nature of the environment in which it will operate
 7 in. A [layered or hierarchal] network architecture is required in order to configure, coordinate
 8 radio technologies coexistence and manage the end to end flows and streams as illustrated in the
 9 following Figure 2.

10

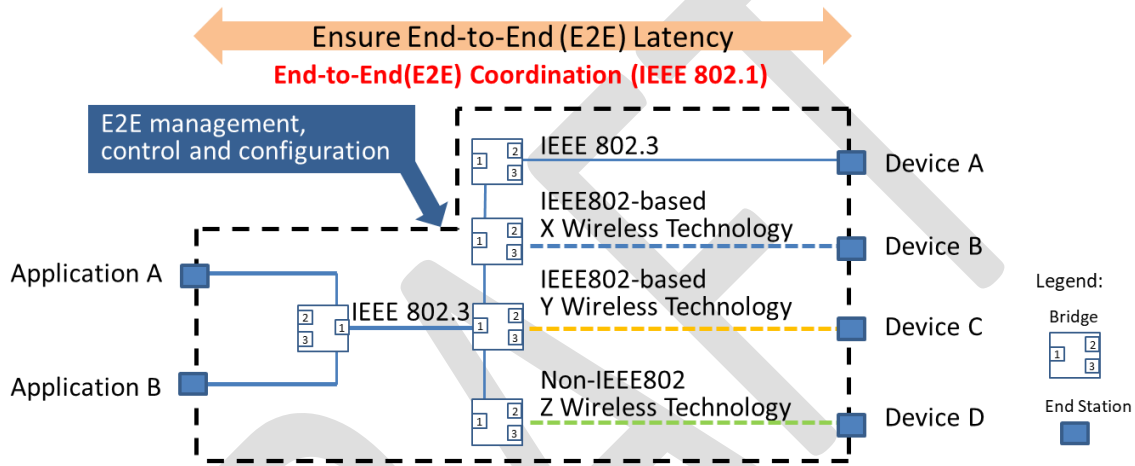

11

12 **Figure 2 Example of Network Topology in Factory Environment**

13

14 End-to-End (E2E) network topology for a factory today is configured by combination of wired LAN,
 15 such as 802.3, IEEE802-based and non-IEEE802 wireless technologies.

16 In order for factory IoT system to work well, a higher layer End to End coordination system is
 17 needed to configure, manage, and control data frames/streams that are transported in a mix of
 18 different technologies with varying QoS performance and attributes.

19 Traditionally, wireless communications have not been popular in the manufacturing field. There
 20 are still many stand-alone machines managed manually by skilled workers. Advanced factories,
 21 on the other hand, have been using communication networks called fieldbus - a type of wireline
 22 network. One of the reasons wireless communications have not been used extensively in factories
 23 is because there are doubts about their stability and reliability. Technology developments as well
 24 as standardization are keys to success for wireless utilization. If these efforts are proven
 25 successful, wireless use for IoT connectivity in factory will increase, resulting in more flexibility in
 26 the manufacturing process and improved productivity within the factory environment.

27 One of the main considerations within the factory network is the need for the provisioning of QoS
 28 for large number of M2M type of data generated from many sensors at the same time with

1 different priority-classes. These data types are periodic in nature and have relatively short packet
2 size.

3 When the factory network is extended over radio, some incompatibility in QoS provisioning
4 between wired and wireless segments become apparent. The first is due to dynamic variations in
5 the available bandwidth (capacity and throughput) over the radio segment as results of the non-
6 deterministic noise/interference, distortions and fading. These dynamic variations cause
7 congestion not just because overloading of the data streams but also because of the wireless link
8 quality deterioration. Under such conditions, the existing IEEE 802 protocols may not function
9 properly.

10 Therefore, for the successful factory automation with high degree of flexibility, dynamic
11 management and control of end-to-end streams across mixed wired and wireless links required
12 some kind of End-to-End coordination is necessary as illustrated in Figure 2 above.

13 Impact of applying QoS and Time Synchronizations functions and protocols to heterogeneous
14 factory network with mixed wired and wireless links in fact, network is further analyzed in
15 section “Factory End to End Network Architecture” with potential and possible solutions
16 discussed. But first, details of the environment and cause of impairments and distortions to radio
17 signals within the factory environment are presented below.

18 **Coordination System for Factory Automation**

19 A “Brownfield” factory is where various facilities and equipment with different standards, of
20 different generations, and by different vendors, coexist in the same sites. Situation of wireless
21 systems implemented in the factory is the same and thus, networks must accommodate various
22 wireless interfaces. IEC already produced coexistence guidelines for manually configuring
23 wireless systems and network for co-existence [1][2]. In order to overcome severe environment
24 for wireless communications (See “Radio Environment within Factory” below). It is expected to
25 apply coordination mechanism, rather than configuration of network elements for co-existence.
26 The same concept is also discussed in IEC [3].

27 **Radio Environment within Factories**

28 It is true that wireless communications are not always difficult everywhere in factories. However,
29 we have to consider that some applications require high-reliable, low-latency and low-jitter data
30 transmission compared with other application in other places like offices and homes in general.
31 Furthermore, the measurement results have revealed that some factories are facing difficulties
32 coming from (a) severe environment for wireless communications, and/or (b) existence of
33 uncoordinated and independent systems in the same space.

34 **(a) The Severe Environment for Wireless Communications**

35 There are two source of impairment to radio signal within the factory environment that cause
36 unpredictable variations to channel capacity, namely:


- 37 1. Fluctuation of signal strength

1 2. Noises

2 As follows are examples of such impairments observed within the factory environment.

3 **Example of Fluctuation of signal Strength:**


4 The layout of the environment for which measurements are made is shown in the Figure 3 below.
5 Master and slave transceivers were located in LOS condition and there was no blockage during
6 measurement.

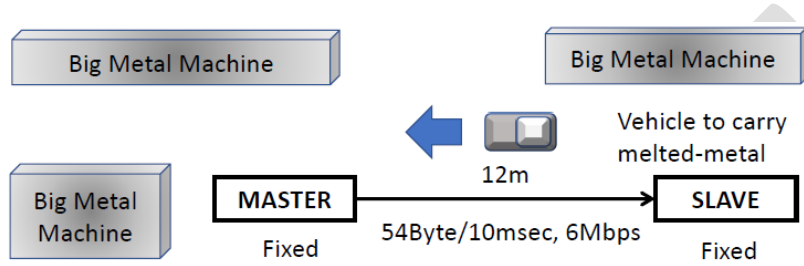

7

8 **Figure 3 Layout in factory for which measurement of RSSI is recorded**

9 The observed RSSI measurement in LOS condition is shown in Figure 4 below.

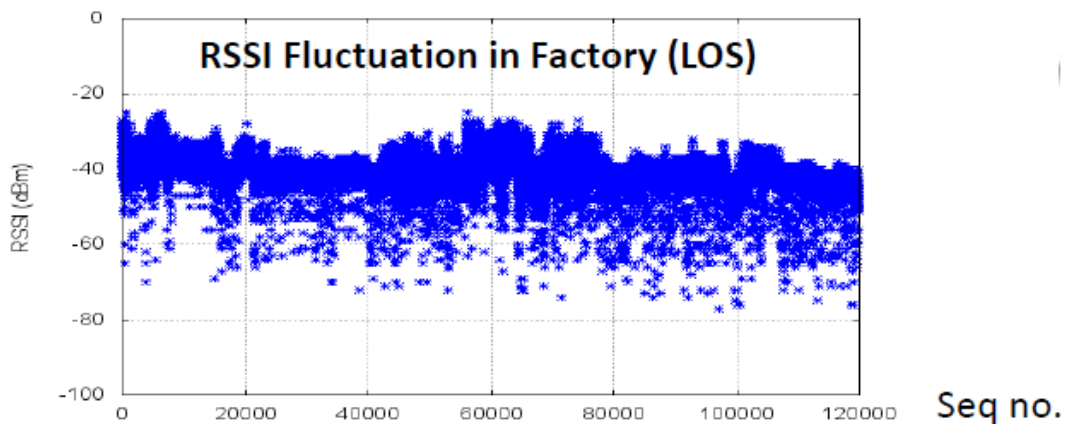

10


11 **Figure 4 RSSI Fluctuation in Factory (LOS)**

12 This fluctuation in RSSI is due to motions of materials, parts, products and carriers in closed space.

13 **Example of Noises:**


14 While carrying radio measurement within the factory environment strong noise signals were
15 observed within the 1.9 GHz band and the 2.4 GHz band. These are shown in Figure 5.

16

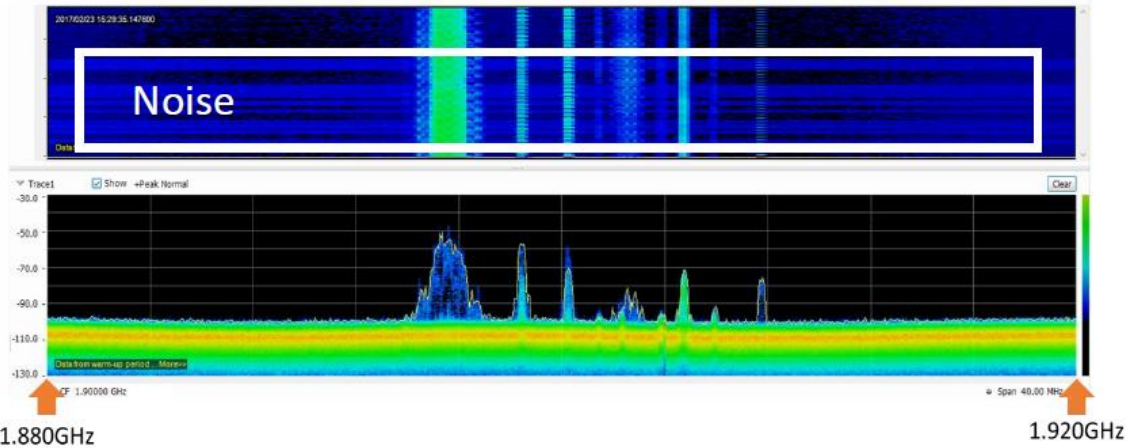

1

(a) 1.9 GHz band

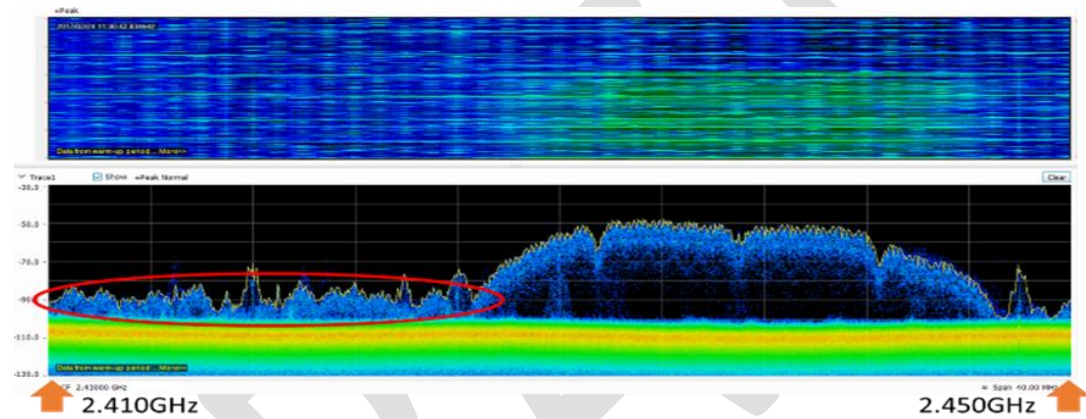

2

(b) 2.4GHz band

3

4

Figure 5 Measured noise spectral density within (a) 1.9 GHz band and (b) 2.4 GHz band

5

6

In the 1.9 GHz band, the noise appears to cause problems for the communication with particular machines as well as problem for using the 1.9GHz band for internal telephone system.

7

8

The source of these noises is attributed to some kinds of manufacturing machines that are causing interference for wireless communications.

9

10 **(b) Uncoordinated and Independent Systems**

11


This issue within the factory environment is attributed to the progressive nature which leads to stepped approach of addition and installation of machines and equipment in the factory and due to coexistence of heterogeneous and legacy devices/systems used within the factory.

12

13

14

An example of using wireless technology in the factory is shown in Figure 6.

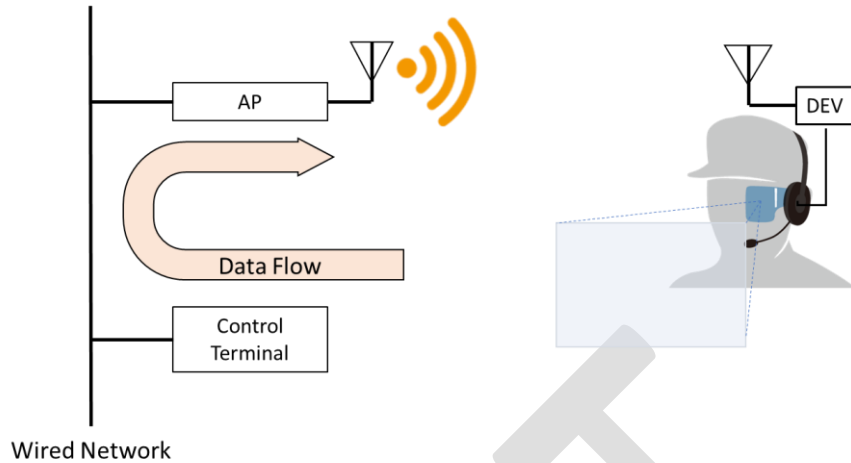

1


2

Figure 6 video monitor application as an example of using wireless technology

3

4 In this example it illustrates an application in which the data flow across the wired network and
 5 bridged across to the wireless domain. In this application there are QoS requirements and latency
 6 constraints for both the video signal and the control signal. Potential problem is a bottleneck for
 7 which delay or uncoordinated signal flow may occur due to disturbance and/or degradation in the
 8 radio signal.

9 When considering the coexistence of uncoordinated wireless systems, we observe the problem
 10 of interference between the legacy wireless communications used by some machinery in the
 11 factory with the new systems using Wi-Fi. The overlapping of signal causing potential interference
 12 is illustrated in Figure 7.

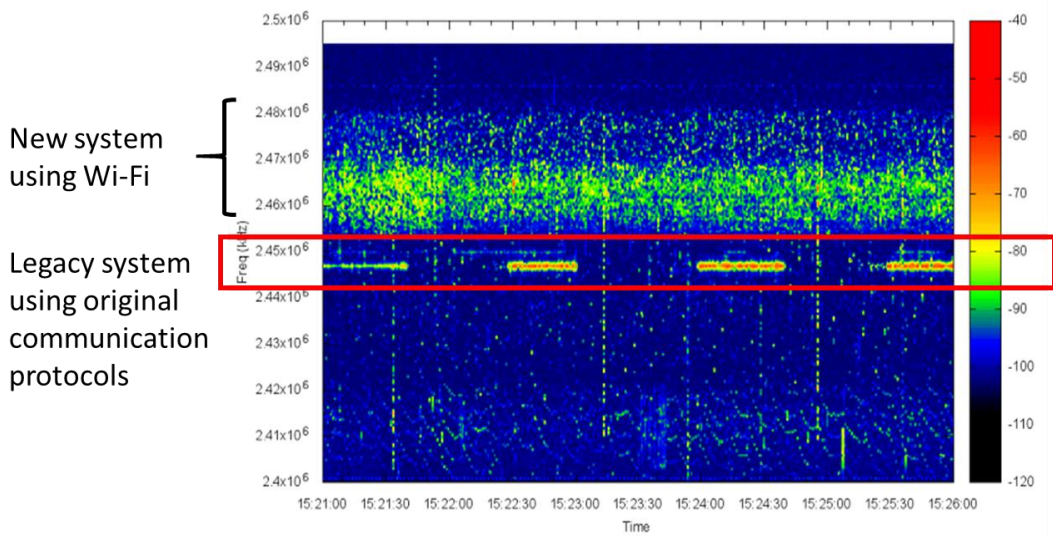


1

2

Figure 7 Coexistence of different wireless technologies

3

4 Some of the problems observe relates to the packet delivery delay. Figure 8 shows packet loss
 5 and packet delivery delay with different interference level. The packet latency increased from 8ms
 6 in case of no interference to around 2 second in the presence interference due to lack of
 7 coordination amongst the used wireless systems used in the factory.

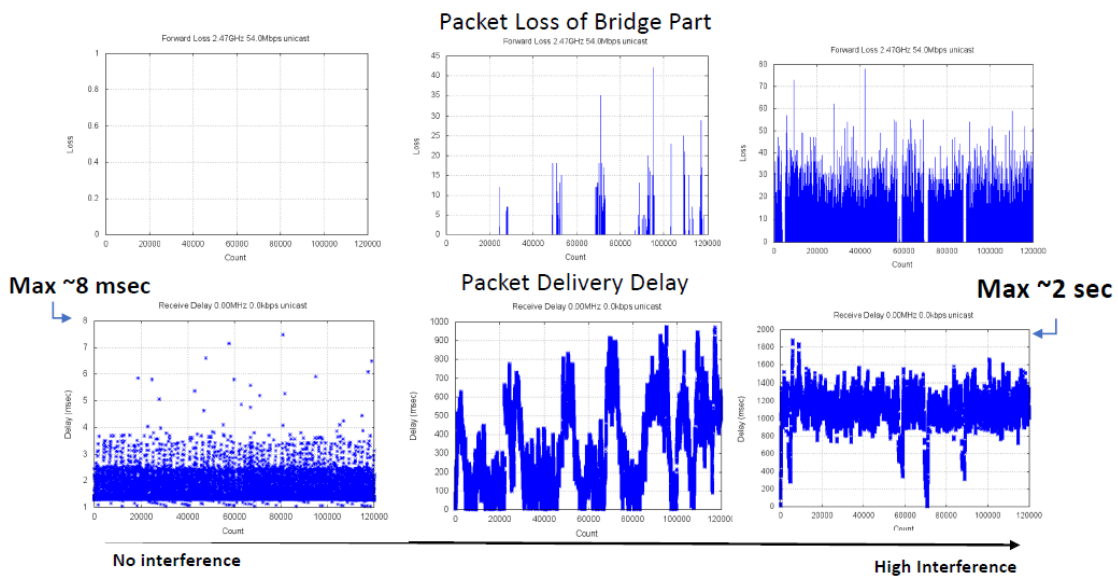

8

9

Figure 8 Impact of interference on latency in uncoordinated wireless systems

1 In this document, wireless applications and communication requirements are described the
2 subsequent sections to understand what shall be improved and enhanced for successful
3 integrated wired and wireless systems.

4


5 **Wireless applications and communication requirements**

6 **Scope of wireless applications in factory**

7 The wireless applications considered in this clause illustrate the use of wireless systems that are
8 currently used –or will be used soon - in factories and factory related facilities. The applications
9 correspond to wireless systems that are installed for specific purpose.

10 For example, wireless systems shown in Figure 9, there are individual systems (within the dotted
11 lines) introduced for specific purposes such as “Collecting Management Information”, and a
12 wireless network consisting of multiple such wireless systems and transmitting information
13 aggregated by them. In this case, each individual system corresponds to a wireless application and
14 described in following sub sections, but not the whole wireless network. That is, each wireless
15 segment is considered as a separate application.

16 Section “Factory Usage Scenario” considers actual factory sites with large needs for wireless
17 communication and describes usage scenarios where multiple wireless applications coexist.

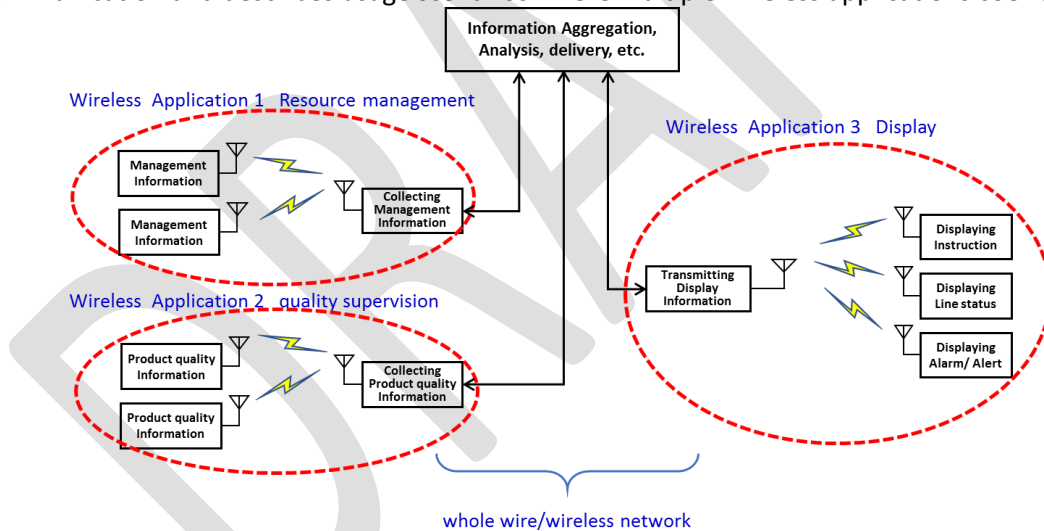

18

19 **Figure 9 Scope of wireless applications in factory**

20

21

22 **Wireless applications**

23 In our usage survey of wireless communication in factories, we collected characteristics of various
24 applications. We classified them according to their purposes, and organized their communication
25 requirements. List of collected wireless applications are shown in Table 1. They were divided into six
26 categories (equipment control, quality supervision, resource management, display, Human safety, and others)
27 and then subdivided into thirteen classifications according to their corresponding purposes.

28

1
2
3

Table 1 Wireless applications

Category	Description	Classification according to the purpose
Equipment Control	sending commands to mobile vehicles, production equipment	(1) Controlling, operating and commanding of production equipment, auxiliary equipment
Quality Supervision	collecting information related to products and states of machines during production	(2) Checking that products are being produced with correct precision (3) Checking that production is proceeding with correct procedure and status
Factory Resource Management	collecting information about whether production is proceeding under proper environmental conditions, and whether personnel and things ² contributing to productivity enhancement are being managed appropriately	(4) Checking that the production environment is being appropriately managed (5) Monitoring movement of people and things (6) Checking the management status of equipment and materials (stock) (7) Checking that the production equipment is being maintained (8) Appropriate recording of work and production status
Display	For workers, receiving necessary support information, for managers, monitoring the production process and production status	(9) Providing appropriate work support (10) Visually display whether the process is proceeding without congestion or delay (11) Visually display the production status
Human Safety	collecting information about dangers to workers	(12) Ensuring the safety of workers
Other	Communication infrastructure with non-specific purposes	(13) Cases other than the above

4


Communication requirements

5
6
7
8
9
10
11
12
13

Figure 10 shows representative wireless applications and their features of wireless communication. Values of data size, data generation rate, number of wireless nodes, and so forth are different for different systems in factories, and according to the required functions of the systems. They use different wireless frequency bands and wireless standards. High frequency bands such as 60 GHz band are expected to be effective for systems with relatively large data volume requirements (image inspection equipment, etc.). 5 GHz band and 2.4 GHz band are being used for systems with medium requirements of data sizes and data generation rate, such as distributing control programs and control of mobile equipment. Relatively low wireless frequency

² Physical objects such as materials and equipment related to production are called “things”

1 bands such as 920 MHz band are being used for applications with low power requirements (such
 2 as environmental sensing).
 3
 4

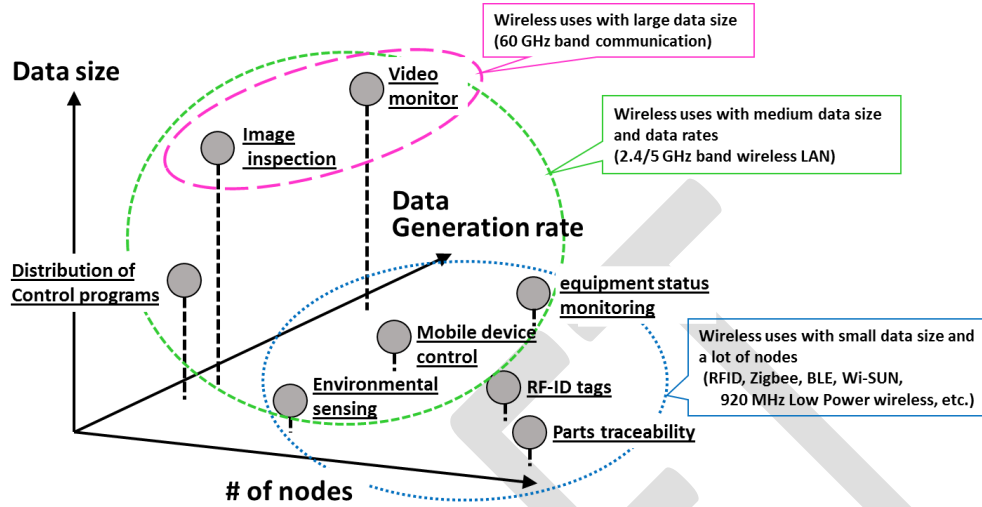

5

6 **Figure 10 Representative wireless applications and their features of wireless**
 7 **communication**

8

9 Figure 11 shows the permissible delay for representative wireless applications. There are wireless
 10 applications, such as robot control and urgent announcements, for which the urgency and
 11 accuracy of information arrival timing requires less than one millisecond latency. On the other
 12 hand, particularly in the categories of quality (inline inspection, etc.) and management
 13 (preventive maintenance, etc.), there are many wireless applications that tolerate latencies larger
 14 than hundred milliseconds.

15

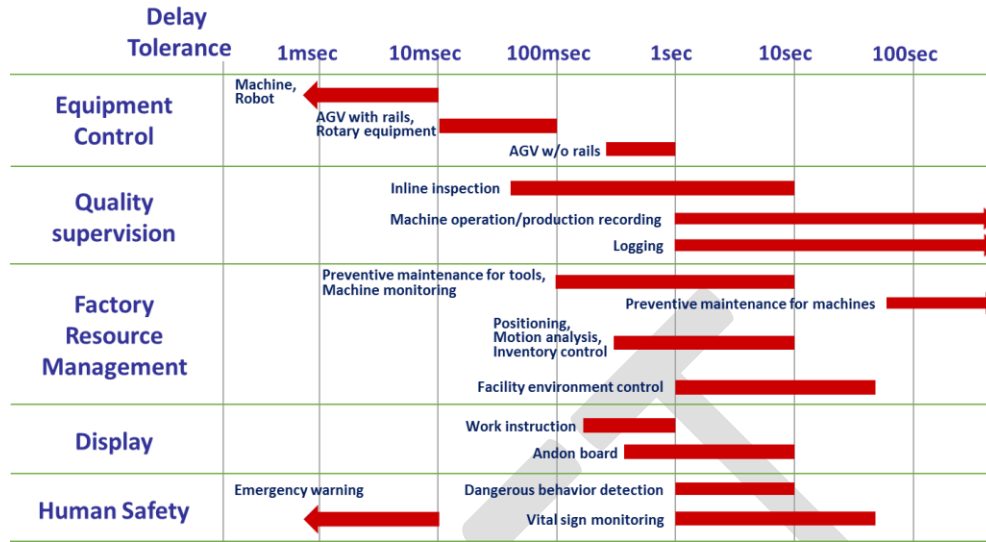


Figure 11 Permissible latencies of representative wireless applications

Details of wireless application and communication requirements

Communication requirements for the thirteen classifications of wireless applications are organized in Table 2 to 14. Each table contains further detailed purpose of the wireless application, corresponding information, and the communication requirements of transmitted data size, communication rate, delivery time tolerance, and Node density³. These attributes are based on observation for a number of samples within the factories surveyed.

Table 2 List of wireless applications and communication requirements for equipment control

Controlling, operating and commanding of production equipment and auxiliary equipment

No.	Wireless application		Communication requirements			
	Purpose	Corresponding Information	Transmit Data Size (bytes)	Communication Rate	Delivery Time Tolerance	Node density
1	control of liquid injection	water volume	64	once per 1 min.	100 msec.	1
2	operation of conveyor control switch	PLC	16	5 per day	100 msec.	5

³ Node density :number of terminals per 20m x 20m. This area dimension is based on the structure in a typical; factory in which pillar are separated by 20m.

1 **Table 3 List of wireless applications and communication requirements for Quality**
 2 **Supervision -1**

3 Checking that products are being produced with correct precision

No.	Wireless application		Communication requirements			
	Purpose	Corresponding Information	Data Size (bytes)	Communication Rate	Delivery Time Tolerance	Node density
3	size inspection by line camera (line sensor)	size measurements	30K	once per sec.	5 sec.	1
4	detect defect state	defect information (video)	500	one per 100 msec.	500 msec.	1
5	detect incorrect operation	anomalous behavior due to adding impurities	1M	once per sec.	10 sec.	1

4

5 **Table 4 List of wireless applications and communication requirements for Quality**
 6 **Supervision -2**

7 Checking that manufacture is proceeding with correct procedure and status

No.	Wireless application		Communication requirements			
	Purpose	Corresponding Information	Data Size (bytes)	Communication Rate	Arrival Time Tolerance	Node density
6	sensing for managing air conditioning	air stream	64	once per sec.	1 min.	1
7	monitoring of equipment	state of tools, disposables	a few hundreds	once per sec.	1 sec.	2
8	counting number of failsafe wrench operations	pulses	64	once per 1 min.	100 msec.	10

8

9 **Table 5 List of wireless applications and communication requirements for Factory**
 10 **Resource Management -1**

11 Checking that the factory environment is being correctly managed

No.	Wireless application		Communication requirements			
	Purpose	Corresponding Information	Transmit Data Size (bytes)	Communication Rate	Delivery Time Tolerance	Node density
9	managing clean room (booth)dust count	Dust count (particles)	32	once per min.	5 sec.	5
10	managing carbon dioxide concentration	CO2 concentration	16	once per min.	5 sec.	2
11	preventive maintenance	machine's temperature	a few tens	real-time	1 sec.	2

1

2 **Table 6 List of wireless applications and communication requirements for Factory**
3 **Resource Management -2**

4 Monitoring movement of people and things

No.	Wireless application		Communication requirements			
	Purpose	Corresponding Information	Transmit Data Size (bytes)	Communication Rate	Delivery Time Tolerance	Node density
12	movement analysis	wireless beacon	a few tens	twice per sec.	few secs.	
13	measuring location of people and things	transmission time (phase), radio signal strength, etc.	a few tens of thousands	once per sec.	1 sec.	2
14	measuring location of products	location of products during manufacture	200	once per sec.	1 sec.	20

5

6 **Table 7 List of wireless applications and communication requirements for Factory**
7 **Resource Management -3**

8 Checking the management status of equipment and materials (stock)

No.	Wireless application		Communication requirements			
	Purpose	Corresponding Information	Transmit Data Size (bytes)	Communication Rate	Delivery Time Tolerance	Node density

15	racking assets (beacon transmission)	information of equipment and things	200	once per sec.	1 sec.	20
16	tracking parts, stock	RFID tag	1K	1~10 times per 30 mins.	100 msec.	3 to 30

1

2 **Table 8 List of wireless applications and communication requirements for Factory**
3 **Resource Management -4**

4 Checking that production equipment are being maintained

No.	Wireless application		Communication requirements			
	Purpose	Corresponding Information	Transmit Data Size (bytes)	Communication Rate	Delivery Time Tolerance	Node density
17	managing facilities	activity of PLC	4K	once per sec. ~ once per min.	one ~ few tens of secs.	
18	measuring energy consumption	energy, current	64	once per min.	1 min.	1
19	monitoring revolving warning light	defect information	100	few times per hour	10 sec.	25

5

6 **Table 9 List of wireless applications and communication requirements for Factory**
7 **Resource Management -5**

8 Appropriate recording of work and production status

No.	Wireless application		Communication requirements			
	Purpose	Corresponding Information	Transmit Data Size (bytes)	Communication Rate	Delivery Time Tolerance	Node density
20	work record	text data	100	once per min.	1 sec.	9
21	work proof	certification data	1K	once per 3 hours	10 sec.	9
22	Checking completion of process	image, torque waveform	100~100K	once per 10 secs. ~ 1 min.	1 sec.	5

9

10 **Table 10 List of wireless applications and communication requirements for Display -1**

11 Providing appropriate work support

No.	Wireless application		Communication requirements			
	Purpose	Corresponding Information	Transmit Data Size (bytes)	Communication Rate	Delivery Time Tolerance	Node density
23	work commands (wearable device)	image	600	once per 10 secs. ~ 1 min.	1~10 sec.	10 to 20
24	view work manual	text data	100	once per hour	10 sec.	9
25	display information (image display)	image (video/still image)	5M	once per 10 secs. ~ 1 min.	few sec.	

1

2 **Table 11 List of wireless applications and communication requirements for Display -2**

3 Visually display whether the process is proceeding without congestion or delay

No.	Wireless application		Communication requirements			
	Purpose	Corresponding Information	Transmit Data Size (bytes)	Communication Rate	Delivery Time Tolerance	Node density
26	managing congestion	counter (number or remaining number)	few bytes	once per 10 secs. ~ 1 min.	few sec.	
27	managing operation activity	activity of PLC	128	once per hour	100 msec	2
28	displaying revolving warning light	ON/OFF	few bytes (a few contact points)	once per 10 secs. ~ 1 min.	0.5~2.5 sec.	30

4

5 **Table 12 List of wireless applications and communication requirements for Display -3**

6 Visualization for monitoring production status

No.	Wireless application		Communication requirements			
	Purpose	Corresponding Information	Transmit Data Size (bytes)	Communication Rate	Delivery Time Tolerance	Node density
29	managing operation activity	image	6K	Continuous	500 msec.	1

30	supporting workers	PLC	200	once per 10 secs. ~ 1 min.	500 msec.	5
31	supporting maintenance	image, audio	200	once per 100 msec.	500 msec.	1

1

2 **Table 13 List of wireless applications and communication requirements for Human safety**

3 Ensuring the safety of worker

No.	Wireless application		Communication requirements			
	Purpose	Corresponding Information	Transmit Data Size (bytes)	Communication Rate	Delivery Time Tolerance	Node density
32	detecting dangerous operation	image	6K	0 per sec. (10fps)	1 sec.	1
33	Collecting bio info for managing worker safety	vitals information	100	once per 10 sec.	1 sec.	9
34		vitals information	200	once per 1 min.	5 sec.	20
35		gait	about 100K	~10 per sec (1fps~10fps)	1 min.	10 to 20
36	detect entry to forbidden area	body temperature, infrared	2	when event occurs	1 sec.	1

4

5 **Table 14 List of wireless applications and communication requirements for others**

6 Cases other than above

No.	Wireless application		Communication requirements			
	Purpose	Corresponding Information	Transmit Data Size (bytes)	Communication Rate	Delivery Time Tolerance	Node density
37	sending data to robot teaching box	coordinates	few hundred kilobytes	twice per year	less than 500 msec. (safety standard)	10
38	relay of images moving	video	75K	30 per sec.		1
39	techniques, knowhow from experts	video, torque waveforms	24K	0 per sec. (60fps)	None	1

17

1
2

3 **Factory Usage scenarios**

4 The usage scenario represents a complete manufacturing process that utilize a number of factory
5 applications to achieve a deliverable product. Examples of factor usage scenarios includes:

- 6 - Metal processing site
- 7 - Mechanical assembly site
- 8 - Elevated and high temperature work site
- 9 - Logistics warehouse site

10 As follows we give detail description of these example factory usage scenarios and its collective
11 applications used to within each of these manufacturing scenarios.
12

13 **Usage scenarios example: Metal processing site**


14 An illustration depicting a wireless usage scene at a metal working site is shown in Figure 12. A
15 building has a row of machine tools, and materials and products (things) are managed in a certain
16 area of the building. Workers are at locations within the building as needed to operate the
17 machines. In the case of operation monitoring and preventive maintenance, sensors may be
18 attached to machines. As machine tools may be used for twenty to thirty years, there may be
19 many old machines, with sensors attached after installation. Communication is necessary to
20 collect information from sensors, but if ceilings are high, installing wiring requires high site work,
21 making the cost of wiring expensive. The cost and long work times required by rewiring work
22 when machines are relocated make wireless communication desirable. In the case of
23 management of objects and analysis of worker movement, the subjects move, so the use of
24 wireless communication is a necessity.
25

26 In the case of operation monitoring, monitor cameras and sensors are installed on machines to
27 monitor the operation status of the machines. For wireless operation, wired LAN to wireless LAN
28 media converters are installed on wired LAN ports. On machines without wired LAN ports,
29 adaptors may be connected for wireless networking. A wireless network is formed between the
30 machines and a wireless access point, and when an intermittently operated machine is switched
31 on, a link with a wireless access point is established automatically without human intervention.
32 As the wireless interference conditions change with the ON/OFF of wireless devices operating in
33 coordination with the intermittent operation start and stop of nearby machines, it is necessary
34 for the wireless network to have flexibility, such as monitoring the radio environment and
35 switching the used frequency channel. Using this network, time series data such as vibration and
36 torque waveforms acquired by tools and sensors inside machines during operation are sent to a
37 server. Using the acquired data on the server, analysis software detects anomalies or anomaly
38 precursors, and informs a manager. According to requirements such as the number of devices,
39 transmitted data volume, and necessity of real time response, the data is transmitted by an
40 appropriate wireless network such as wireless LAN, Bluetooth, or Zigbee.
41

42 In the case of preventive maintenance, various sensors are installed on machine tools. The sensors
43 and wireless communication device are implemented on a single terminal, and terminals may
44 execute primary processing before sending, or the gateway may execute primary processing on

1 data collected from sensors via a wireless network. When sensors and wireless device are
2 implemented on a single terminal, the terminal may aggregate data received from other terminals
3 within radio range and attach it to its own data when it transmits, to reduce the number of
4 transmissions. It may be necessary to sample or compress the data to reduce the volume of data
5 transmitted. Also, data may be normally recorded at the terminal, but limited under certain
6 conditions in order to reduce the data volume.

7
8 In the case of management of objects and movement of workers, wireless communications such
9 as Bluetooth Low Energy (BLE) are used to monitor the locations of people and things. A wireless
10 location monitoring system uses tags which periodically transmit beacons and gateways which
11 receive the beacons. Multiple gateways are placed in the monitor area and tags are attached to
12 each person or thing to be monitored. Beacons transmitted by a tag are received by multiple
13 gateways and the received signal strengths are used determine the location of the tag. By
14 obtaining acceleration information as well as tag ID, the accuracy of location information can be
15 increased. Wireless communication is also used when an operator remotely operates a robot with
16 a terminal called a teaching box. The operator moves around the robot to visually check the
17 position of the robot and its relation with the object being processed. The movement of the
18 operator is only around the robot and not over a wide area, but it is important that the response
19 of the wireless communications is fast. In order to ensure safety, commands triggered by an
20 emergency stop switch need to be transmitted immediately and reliably.

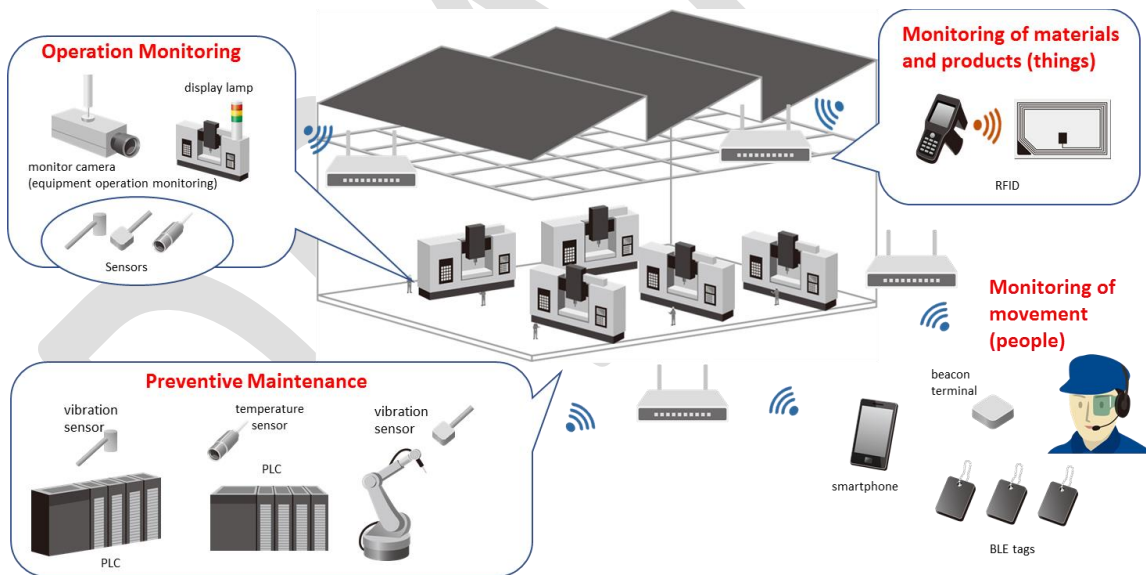

22
23 **Figure 12 Usage scene: Metal working site**

24
25 **Usage scenarios example: Mechanical assembly site**

26 A wireless usage scene at a mechanical assembly plant is shown in Figure 13. In a mechanical
27 assembly plant, the benefit of wireless communications is expected where management of the
28 environment is necessary, such as during welding and painting, building systems for collection
29 and analysis of data for quality management and traceability, and management of operations,
30 such as Automated Guided Vehicles (AGV) for transport of components.

1 Sensors such as temperature and humidity sensors and particle sensors are used for
2 environmental monitoring in places such as a paint shop or a clean booth. Wireless
3 communication is used for collecting sensor information because it is possible to manage data
4 from remote rooms, and install sensors inside a room, such as in a clean booth, easily at any time
5 without requiring reconstruction work. The sensors transmit collected environmental information
6 to an upper layer server at periodic time intervals. It is required that no data is lost, that
7 communication routes can be checked when necessary at times of trouble, and relay devices can
8 be installed where radio signal reception is weak without complex expert knowhow.

9
10 Wireless communication is used to send data to servers - inspection data from large numbers of
11 workbenches, operation sequences in Programmable Logic Controllers (PLC) used for machine
12 control, error information and environmental information. Also, work tools such as torque-
13 wrenches, acquire and send to servers data such as the number of wrench operations and the
14 success of the operations, and even time series data such as vibration and torque waveforms. As
15 ISO 9001 specifies the mandatory recording of inspection data, it requires the reliable collection
16 of data, although strict requirements are not imposed on communication latency. Hence when
17 transmitting data, it is necessary to check radio usage in the neighborhood, and use available
18 frequency bands and time slots (transmission times) according to the requirements such as
19 number of machines, transmitted data volume and necessity of real-time response.

20
21 In the case of production management display (such as an “Andon” display board), in coordination
22 with the above information, wireless communication is used to send data for real-time display of
23 production status information, such as production schedule, production progress and production
24 line operation status.

25
26 In the case of AGV with autonomous driving ability, the AGV itself will be able to control its
27 current position and path. Each AGV will be sent a command “go from position A to position B”
28 from a parent device (fixed device) and the AGV will move accordingly. As an AGV may move over
29 a wide area in a factory, it is possible that in some locations the quality of wireless communication
30 will degrade due to physical obstruction by facilities and manufacturing machine tools. Hence, it
31 is necessary to consider the radio propagation environment when deciding where to place
32 wireless access points and to consider the use of multi-hop networks. The number of mobile
33 vehicles used in factories is continuing to increase, and the related issues of the radio environment
34 will require more consideration in the future.

35

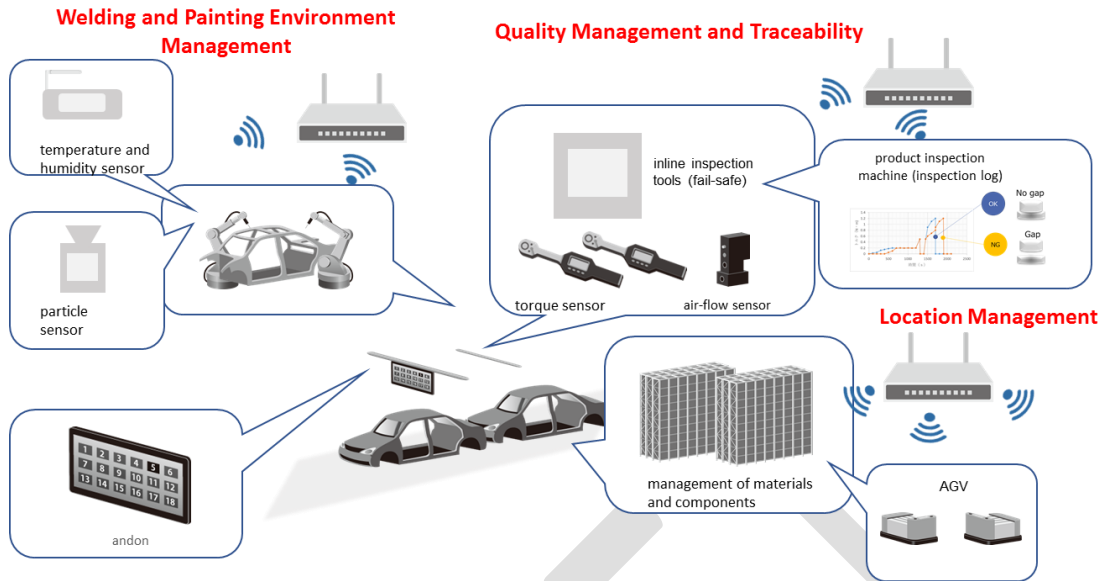


Figure 13 Usage scene example: Mechanical assembly site


Usage scenarios example: Elevated and high temperature work site

Figure 14 shows an illustration of a wireless communication scene in an elevated and high temperature work site. In production sites such as chemical plants and steel plants, there are intrinsic dangers due to collisions and falls, and extreme environments with high temperature, high humidity. Monitoring each worker's location and situation from vitals sensors and visual images will be an important application. Workers move about, so it is necessary to collect data using wireless communication. It is assumed that production facilities will be used for many years, so it is necessary to collect information about facility operation and monitor facility operation from the point of view of preventive maintenance. In regard to collecting information from existing facilities, the use of wireless systems that can be easily added are promising for monitoring facility operation using cameras and indicator lights.

In a production site with elevated or high temperature work places, such as a drying furnace or a blast furnace, wireless communication is used to manage the safety of workers, by collecting workers' vitals sensor information (pulse, activity, body temperature, room temperature, posture (fall detection), etc.) and environmental information (temperature and humidity, pressure, dew point, etc.), and remotely monitoring the situation at the production site using cameras etc. In such cases, wireless communications, such as multi-hop networks with wireless LAN / 920 MHz communication, are used to collect data. Using sensors that detect entry into forbidden areas, combined with BLE beacons, it is possible to monitor the location of workers and warn of entry into dangerous areas. Wireless communications are basically used to transmit position information and vital information of each worker, but it is also possible to send alerts to workers and managers when an abnormal situation arises. Vitals sensors should be of types that do not interfere with work, such as wristwatch type, pendant type, or breast-pocket type.

The communication terminals in a production site may form a wireless multi-hop network, and upload sensor data to a cloud service or server (where the data is finally collected) via a gateway. The uploaded data is used to monitor the workers status. For example, in the case of a system

1 with a path from a sensor attached to a worker via a gateway to a server, wireless communication
 2 from the sensor to the gateway might use 920MHz band communication, wireless LAN, or
 3 Bluetooth. Communication from gateway to server will require connection via 3G/LTE or wired
 4 LAN. When the server is far from the gateway, and it is necessary to have a wireless connection
 5 (such as when wiring is not possible) a wireless mesh using wireless LAN, or a point-to-point 60
 6 GHz frequency band system may be used as a backbone. In this case, interference between the
 7 wireless backbone and the communication between sensors and gateway must be considered.
 8

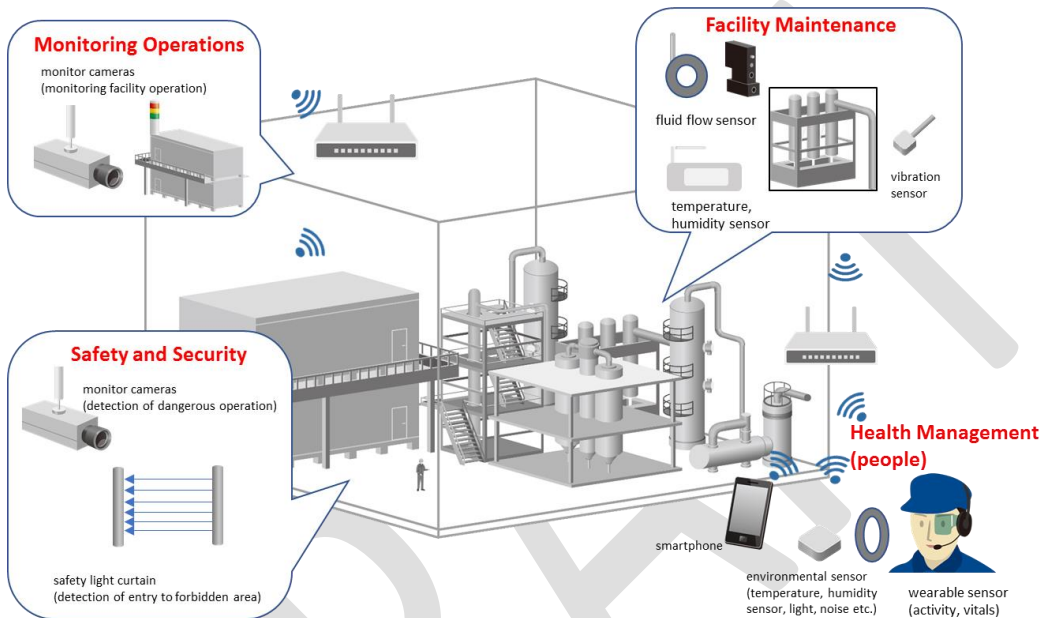

9
 10 **Figure 14 Usage scene example: Elevated and high temperature work site**
 11

12 **Usage scenarios example: Logistics warehouse site**

13 In a logistics warehouse⁴, as shown in Figure 15, three-dimensional automatic storage⁵ is used to
 14 increase spatial use efficiency. Operation of a three-dimensional automatic storage system
 15 requires monitoring of storage operation, preventive maintenance of the stacking system,
 16 management of automated guided vehicle (AGV) movement, and so on. A large scale warehouse
 17 has multiple storage racks placed in a rows, each of over 30m height and 100m length, and
 18 separated by a few meters or less.

19
 20 The operational status of the warehouse is monitored in conjunction with the transport of storage
 21 items in and out by a computer-controlled stacker-crane. When the stacker-crane makes an
 22 emergency stop due to detecting a stacking fault, workers might have to climb up a high ladder,
 23 tens of meters high, to manually check and repair the stack.

24 When the inspection and repair operation is in a high place, there is greater danger for the worker
 25 and operation delay time increases. Previously, workers had to spend time checking the storage
 26 even when there was actually no need to stop. Now cameras are used to remotely check the

⁴ A warehouse in which items are stored and managed in racks, and moved in and out automatically with computer control.

⁵ Equipment for transporting in and out of a three-dimensional automatic storage system.

1 situation on the stacks and the stacker-crane to decide whether operation should be halted or
2 continued, reducing the number of dangerous tasks of workers, and reducing the average time to
3 recovering normal operation. However, in large-scale storage systems, the stacker-cranes move
4 over large ranges, and wiring to cameras attached to stacker-cranes is difficult. Using wireless
5 cameras eliminates the need for signal cables, and so the installing of wireless cameras in three-
6 dimensional automatic storage systems is increasing. Information is sent from the wireless
7 devices on the luggage platform of the stacker-crane to wireless access points (fixed stations)
8 which are placed at one or both ends of the stacker-crane's floor rail.

9
10 The images sent from the camera could be video (for example, 30 frames-per-second VGA) or still
11 images (for example, JPEG or PNG with VGA resolution). The speed of the luggage-platform could
12 be as fast as 5 meters-per-second, and the wireless device should automatically select, connect
13 to, and transmit data to the wireless access point with the best link quality. It should also avoid
14 interference with wireless devices on other stacker-cranes which might be running on parallel
15 racks separated by just a few meters.

16
17 In three-dimensional automated storage systems, higher speeds of stacker cranes and their
18 continuous operation are required to increase the transport efficiency. Sensors are attached to
19 the drive system that drives the vertical motion of the luggage-platform, and the drive system
20 that drives horizontal motion of the crane along its rails. A wireless communication device relays
21 the sensor data, and computer analysis and learning of the data is used for preventive
22 maintenance of the drive systems.

23
24 In some cases, in order to increase the flexibility of the layout in the warehouse, the luggage
25 carried out by a stacker-crane is transported to another storage or work place by a forklift or AGV.
26 The magnetic tape that is used taped on the floor to guide the motion of a trackless AGV cannot
27 carry data, so control information such as destination is sent by wireless communication. Also,
28 forklifts and AGVs have devices for detecting their location, and location information is relayed
29 by wireless communication. Location information collected from forklifts and AGVs is used to
30 manage their operation, and methods are being developed to improve transport efficiency by
31 coordinating their motion with stacker-cranes, allowing the selection of the AGV with the shortest
32 travel distance, for example.

33
34 In regard to use of sensors for preventive maintenance on drive systems of stacker-cranes, and
35 managing movement of forklifts and AGVs, in large scale factories, the range of motion may
36 extend over large areas with various large structures such as three-dimensional storage racks, so
37 the placement of wireless access points and the selection of wireless frequency band are
38 important issues.

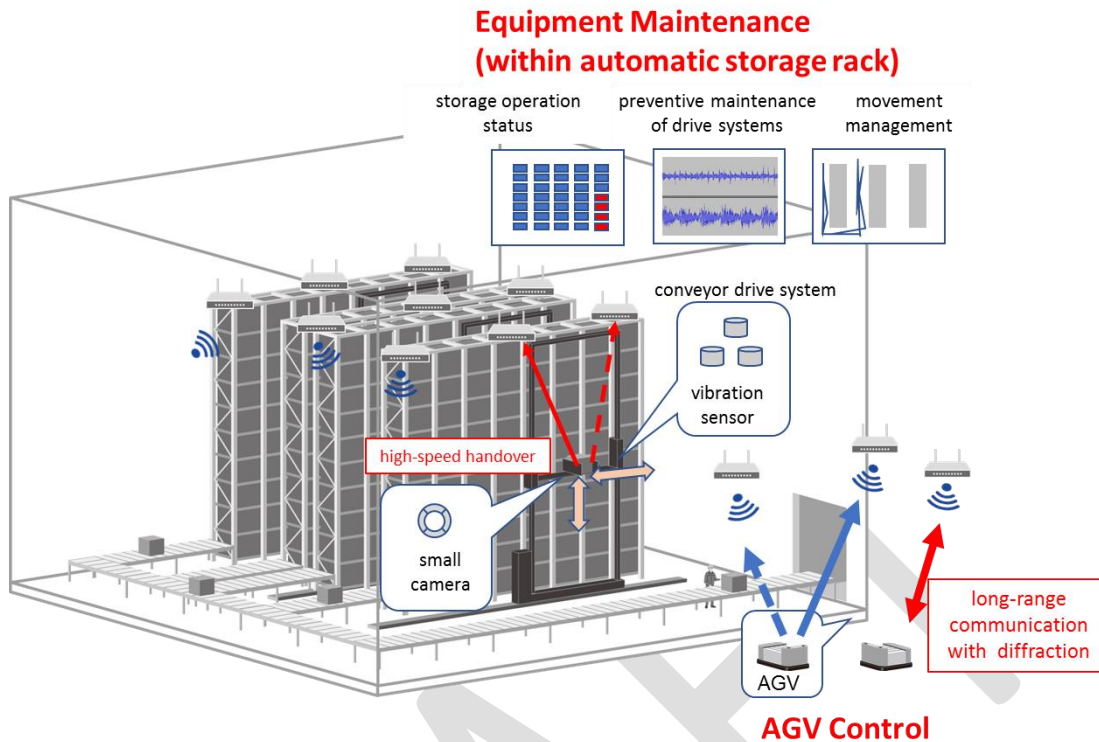


Figure 15 Usage scene example: Logistics warehouse site

Technological Enhancement of Networking for Flexible Factory IoT

Concept of architecture

The future flexible factory communication system comprises integrated wired/wireless-combined networking which needs to accommodate various system applications with different communication requirements for end-to-end QoS. These requirements are satisfied for end-to-end communications by reinforcing priority control and coordinating with those system applications to adapt to rapid change in links and paths quality.

Gaps in existing IEEE 802 technologies

Coexisting of wide variety of factory applications with different requirements

According to Figure 11 and Table 2~14 in Section “Wireless Applications and Communication Requirements”, examples of QoS tolerances in factory applications are summarized in Table 15. Table 15 shows that tolerance of latency is classified into small, medium or large, tolerance of bandwidth is classified into wide, medium or narrow, and tolerance of packet loss is classified into lossless or not. It means that factory applications may need large number of QoS class requirements for communications, which is not covered by 8 classes defined in IEEE802.1D standard. To deal with large number of QoS class requirements, defining usage of tag fields may be needed for precise and fine QoS control in L2.

1

2 **Table 15 Examples of QoS Tolerances in Factory Applications**

Category of Wireless Applications	QoS Tolerances							
	Latency (msec)			Bandwidth (kbps)			Packet Loss	
	<100	100~1000	>1000	>1000	100~1000	<100	Loss less	Non-Loss less
Equipment Control	✓	✓				✓	✓	
Quality Supervision	✓	✓	✓	✓	✓	✓	✓	
Factory Resource Management		✓	✓	✓	✓	✓	✓	✓
Display		✓	✓	✓	✓	✓	✓	✓
Human Safety	✓		✓	✓	✓	✓	✓	✓
Others		✓	✓	✓			✓	✓

3

4 **QoS management for factories**

5 QoS management of streams across their paths is important in the automation of factories. There
6 are several functions and protocols within existing IEEE802 standards that maybe used for the
7 provision of QoS and priority control over bridged network. Example of such functions are given
8 as follows.

9

10 **802.1Qat Stream Reservation Protocol (SRP):**

11 Stream Reservation Protocol (SRP) is an amendment to the IEEE 802.1Q standard (standardized
12 separately as 802.1Qat) to provide end-to-end management of resource reservations for data
13 streams requiring guaranteed Quality of Service (QoS) in bridged Local Area Networks (LANs). The
14 protocol allows end stations to register their willingness to "Talk" or "Listen" to specific streams,
15 and it propagates that information through the network to reserve resources for the streams.
16 Network bridges between the end stations maintain bandwidth reservation records when a Talker
17 and one or more Listeners register their intentions for the same stream over a network path with
18 sufficient bandwidth and other resources.

19 The network signaling for SRP to establish stream reservation is defined as the Multiple Stream
20 Registration Protocol (MSRP), which is also standardized in 802.1Qat.

21 Enhancements to the configuration of time-sensitive Streams are provided by P802.1Qcc /D2.1,
22 amendment to IEEE Std 802.1Q-2018. The enhancements address Time-Sensitive Networking
23 (TSN) application requirements beyond audio/video (AV) traffic. It also specifies managed objects
24 for configuration of Bridges by a Centralized Network Configuration (CNC) component.

25

26 **802.11aa MAC enhancement for robust AV streaming:**

27 802.11aa specifies a set of enhancements to the 802.11 MAC functions which enables the
28 transportation of AV streams with robustness and reliability over wireless shared medium.


29 From the bandwidth reservation standpoint an IEEE 802.11 BSS network is modeled as a Bridge.
30 An IEEE 802.11 BSS provides a single entity called the Designated MSRP Node (DMN) to manage
31 the BSS bandwidth resources for the MSRP streams. The DMN maps the MSRP commands into
32 IEEE 802.11 MLME/SME QoS services, and maps the SRP TSpec to 802.11 TSPEC parameters as
33 well.

1 Interworking between 802.1Qat and 802.11aa enables integration of 802.11 TSPEC ADDTS
2 request/response protocols with SRP to facilitate end-to-end stream reservations when one or
3 more IEEE 802.11 links are part of a path from Talker to Listener.
4

5 **Issues:**

6 To announce the statistics of the stream to be provided, Talker should make a declaration of
7 'Talker Advertise' which would be propagated by MSRP throughout the network. In the parameter
8 data carried by the declaration advertisement, a component of 'Accumulated Latency' is used to
9 estimate the worst-case latency that a stream could encounter from Talker to Listener. Talker
10 initializes the value and each bridge along the path will add the maximum expected delay before
11 arrival at the next peer.

12 Radio propagation is not good in factories due to multipath and shadowing environment in metal
13 objects presence and closed space, so latency fluctuation over radio link is large. If such event
14 occurs e.g. on Bridge C in Figure 16, that would increase the latency beyond the original guarantee
15 (e.g. Accumulated Latency), MSRP will change the 'Talker Advertise' to a 'Talker Failed' causing
16 the end-to-end reservation to be failed as shown in Figure 16. For this reason in a factory
17 environment, 'failure' frequently occurs so that streaming cannot be provided in some cases.

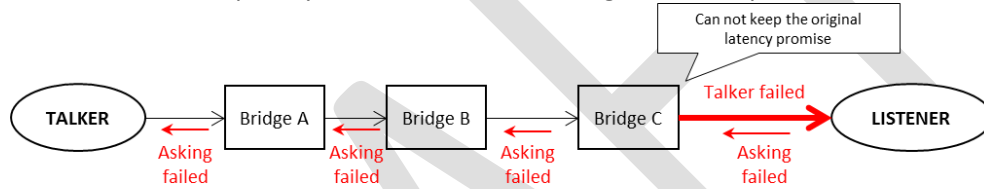

18
19 **Figure 16 Radio fluctuation causes reservation failed**

20
21 Besides the example given above, there will be similar problems considering bandwidth
22 reservation in the factory wireless environment. The matter is that, the bridge currently
23 determines the registration and allocation of the resources from its own perspective. Along the
24 declaration propagated throughout the network, decision is made on individual bridge's 'worst'
25 estimation on the performance of current hop. In some cases, it could be much worse than the
26 actual performance. In other cases, it could be breached very often.

27 Coordinated control among the bridges is necessary to help the situation by addressing the
28 unstable bandwidth / latency issues. The controller could manage the resources from an end-to-
29 end viewpoint during the lifetime of the stream. The performance fluctuation can be more
30 tolerated as long as the end-to-end bandwidth can be guaranteed. With such flexibility,
31 robustness of the end-to-end stream reservations, as well as the network efficiency, will be
32 improved.

33
34 **Other TSN protocols:**

35 TSN provides a protocol suite to enable deterministic networking end-to-end. Future industrial
36 wireless products should be able to take advantage of this infrastructure. It requires higher layer
37 services to be better interworking with lower layer management entities.

38 As the fundamental architectural issues cleaned up by 802.1Qbz and 802.11ak, and given the fact
39 that great potential will be introduced to wireless technologies by e.g. 802.11ax, 802.11ba, it is
40 now possible to extend more advanced protocols such as Flow-based Priority Control (FPC) and
41 Enhanced Transmission Selection (ETS) to the wireless shared medium.
42

1 **Wireless link aggregation designed for redundancy**


2 As shown in Figure 4, wireless signal strength fluctuates largely and rapidly even in line-of-site
3 environment inside factory. In such environment, it is difficult to keep stable bandwidth or low
4 latency for factory IoT applications.

5 For improving stability of wireless link, taking advantage of diversity such as spatial and frequency
6 diversities are effective. A simple way to take on gain of the diversity is to employ multiple wireless
7 ports on each node or each wireless access point and use redundant wireless links for redundant
8 data transmission.

9 **Figure 17** illustrates examples of use of the multiple wireless ports. In **Figure 17(a)**, a machine
10 tool has two wireless ports and each wireless port has a wireless link with a different wireless
11 access point. Potential bandwidth of each link fluctuates largely, and it becomes lower than
12 bandwidth required by an application sometimes. However, correlation of the fluctuation is
13 generally low if position and frequency of each wireless access point are different from those of
14 another wireless access point. Therefore, such intermittent low bandwidth can be compensated
15 if the wireless links are aggregated and data is transmitted redundantly through the aggregated
16 links.

17 **Figure 17 (b)** shows another example. In this case, a vehicle node moves inside a factory where
18 large metal machines are located. Line-of-site relationship with a wireless access point is lost
19 frequently as the vehicle moves behind the metal machine. In such a case, wireless systems
20 generally attempt to do handover to the other wireless access point, however, it takes few
21 seconds or more to complete the handover after the wireless link quality becomes bad.
22 Applications are suffered from the bad wireless link for few seconds or more in this case. If the
23 vehicle has multiple wireless links and use them as a redundant data path, impact of the bad
24 wireless quality can be mitigated largely.

25

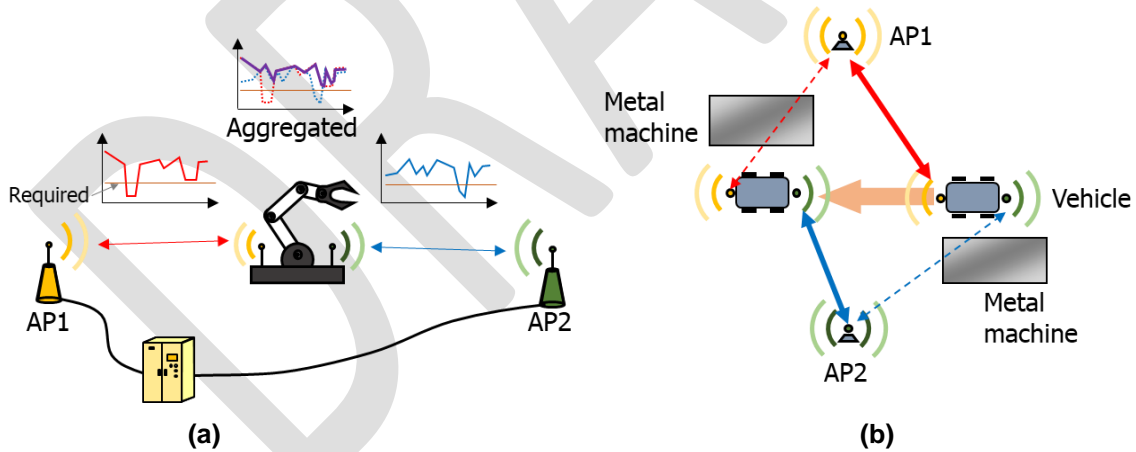

26

27

28 **Figure 17 Examples of use of multiple wireless ports**

29


30 Such redundant data transmission through aggregated paths can be implemented in various
31 layers. However, bridging layer should be the most appropriate layer to handle paths aggregation
32 for achieving the low latency performance required in the factory IoT usage. Link aggregation
33 defined in 802.1AX is a related technology, however, it cannot be applied for the wireless link
34 aggregation directly due to the following reasons:

- 35 ● Main objective of link aggregation in 802.1AX is to increase bandwidth, and duplicated frame
36 transmission is not allowed for maximizing total bandwidth of aggregated links. However,
37 main objective of the wireless link aggregation for factory IoT use is to stabilize bandwidth

1 and latency of data communication. Duplicated frame transmission through multiple wireless
 2 links needs to be allowed.

3 ● 802.1AX mainly assumes wired links and single-hop link topology; **Figure 18(a)** shows an
 4 example for this. As shown as “Link aggregation 1” in **Figure 18(b)**, if all the wireless ports
 5 are connected to the same wireless access point, the same aggregation protocol of 802.1AX
 6 may be applicable. However, a wireless node can have wireless links with multiple wireless
 7 access points in the wireless link aggregation usage. Link aggregation needs to be handled
 8 through multiple bridges shown as “Link aggregation 2” in **Figure 18(b)**.

9

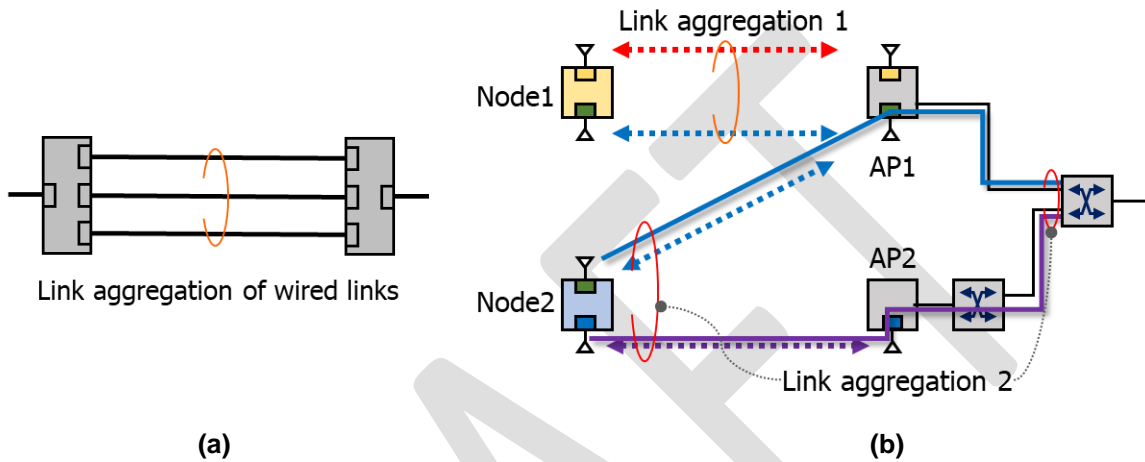


10
 11 (a) (b)
 12 **Figure 18 Assumed link topology**
 13

14 **Adaptation to rapid changes in wireless environments**

15 Modern manufacturing process requires fast feedback to get immediate response after each
 16 action by worker in management and operation to increase high productivity and high quality of
 17 products, simultaneously, where human and machines tightly collaborate in high-mix and low-
 18 volume production. Permissible delay in feedback messages for most wireless applications in this
 19 sense is ranging from 20 msec to 10 sec as shown in Figure 11. The lower boundary may be
 20 determined by human reaction time [4]. For example in an application in which an online
 21 inspection, an action by worker is checked by a system whether it is good or not. He/she shall
 22 receive go/no-go signal from the system indicating to whether to proceed to the next action or
 23 not. In the network accommodating factory applications such as quality supervision, factory
 24 resource management, display, and some of equipment control and safety, permissible latencies
 25 within 100 msec or less for communications between a terminal and a management system of
 26 the factory application is considered reasonable.


27 In a typical factory structure (or layout), there are many metallic objects that are moving in a
 28 closed space, resulting in unforeseeable fluctuation in received radio signal indication (RSSI) due
 29 to rapid change in propagation condition. An example of measurement in a metal casting site
 30 showed RSSI changed by more than 20dB within a short time ranging from ten’s millisecond to
 31 hundred’s millisecond as disused earlier in Figure 4. The bandwidth might decrease by one-tenth
 32 in a case during RSSI dropped. Another example of measurement in a large machine assembly site
 33 indicted burst-loss occurred for the duration of several hundred msec as shown in Figure 19.

34

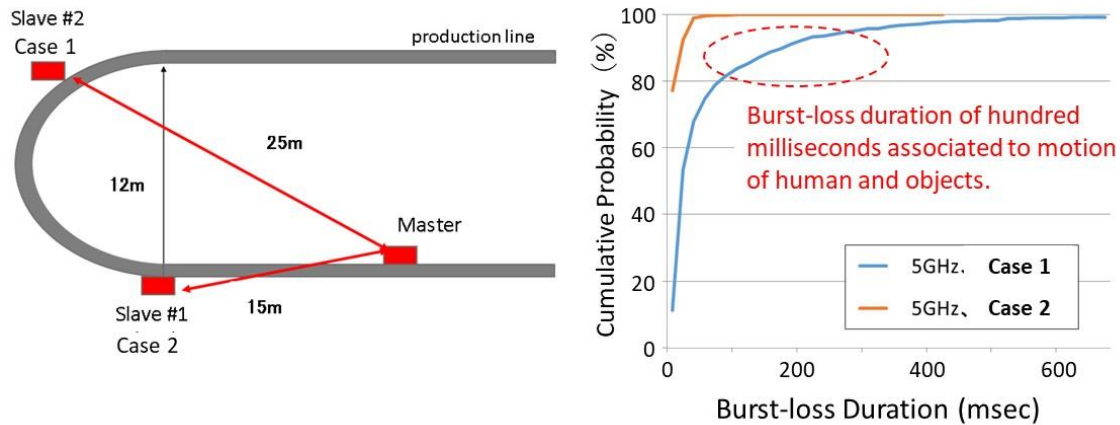

1
2 **Figure 19 Burst-loss measurement in a large machine assembly site [5]**

3
4 In order to ensure transfer of information between terminals in a dynamically changing wireless
5 environment within the allowed latency as required by factory applications, a fast and efficient
6 queuing control and forwarding mechanism to multiple links is needed while maintaining
7 required QoS for the application. For this purpose, we consider the applicability of the PFC
8 (Priority-base Flow Control) protocol specified in the Std. 802.1Q-2014, as shown in Figure 20.
9

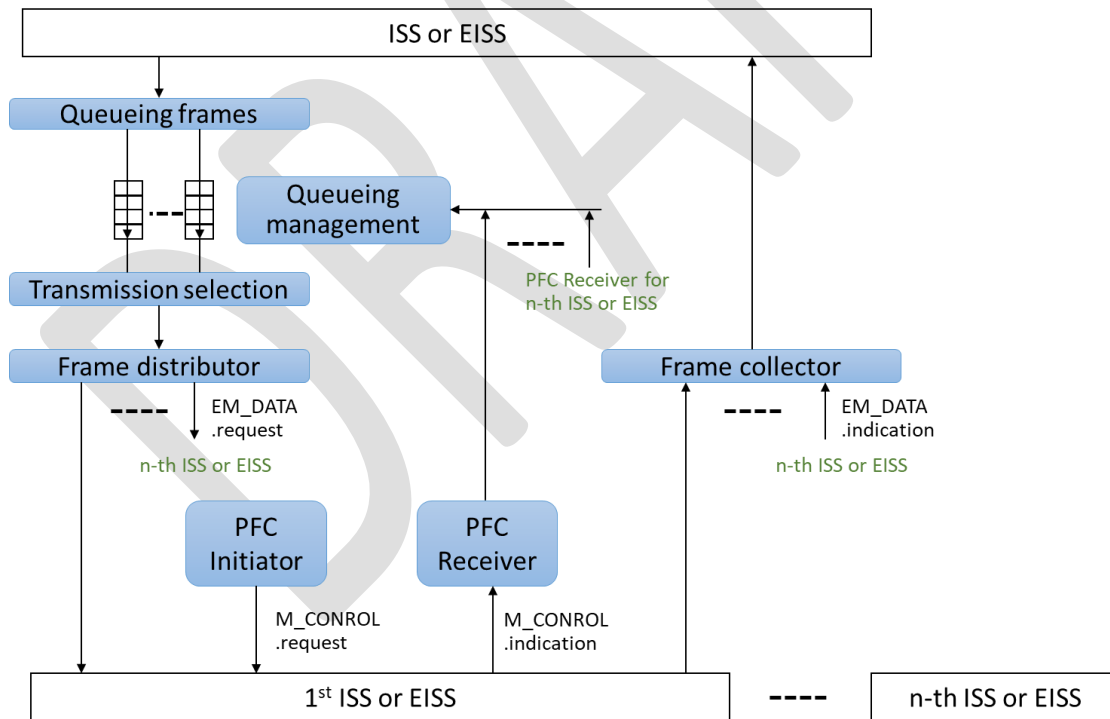

10
11 **Figure 20 PFC aware system queue functions with Link Aggregation**
12 **(Rewritten Figure 36-4 in Std. 802.1Q-2014)**

1 It should be noted that the application of PFC has been so far used in data center environment⁶.
 2 However, when used in a factory environment such as the one described above, the performance
 3 and efficiency of the PFC protocols can be degraded significantly due to reduced available
 4 bandwidth between terminals. A real time video streaming is a good example illustrating when
 5 the performance of the PFC function can be improved when operating in varying radio
 6 propagation conditions. Traffic for the video stream is allocated high priority in normal operation
 7 condition (i.e. traffic type for video has higher priority than traffic for critical applications
 8 according to Table I-2 in the Std.802.1Q-2014 [6]). With varying RSSI, the available bandwidth
 9 between terminals is reduced. In real time video streaming application, video quality can be
 10 adapted to available link bandwidth (along the end to end path) at the codec source. However,
 11 until this video adaptation is complete, while the bandwidth of the link is low and the video quality
 12 is degraded below its usable level, streaming is paused although further packets are incoming to
 13 the queueing buffer which are not useable any more. This is the current operation of PFC because
 14 data loss is not allowed in a data center for which the PFC protocols was originally designed.
 15 Since the video packets are no longer usable, pause operation and preserving the video packets
 16 is no longer valid during this transition period. During this period, the packets for steaming shall
 17 be discarded and critical traffic shall continue to be sent. A more efficient operation method is to
 18 discard the unusable video packets until useful video packets are sent again when video
 19 adaptation to a lower quality matching the available bandwidth, or the link bandwidth is
 20 recovered naturally or by switching to a new link with sufficient bandwidth.

21
 22 If another ISS (or EISS) connection becomes available for the video stream application, data frame
 23 can then be forward dynamically at the bridge. (Table 15)
 24
 25

26 **Table 15 Gaps between Current PFC (Std.802.1Q-2014) and Functions to be enhanced**

Current PFC (Std.802.1Q-2014)	Functions to be enhanced
8(max) links can be independently paused and restarted by queue control. Only no loss is acceptable for data center environment.	Not only “pause” but also “discard” are acceptable depending on data attributes to express a variety of QoS requirements in factory applications.
There is no specific description about “frame distributor”	Dynamic frame distributor mechanism is required to follow rapid changing bandwidth and to avoid burst losses for each ISS/EISS connected to a wireless media. Also see later description in Wireless link aggregation .
—	It is required to have negotiation function with factory applications based on data attributes. Data rate reductions is requested if the factory application indicates reduction is “acceptable” in the data attributes.

27
 28 The issue here is to adapt to rapid changes in wireless environments while ensuring a variety of
 29 QoS requirements across the end-to-end connection of the whole network. The rapid flow control

⁶ Section 36.1.1 in Std. 802.1Q-2014 says “Operation of PFC is limited to a data center environment.”

1 at the bridge based on information of data attributes and flow control over the entire network
2 shall work together by a coordinator as shown in Figure 2.


3

4 **Competition of wireless systems in unlicensed bands**

5 As for the factory IoT, wireless technologies which work in unlicensed bands are used in many
6 cases because they have large cost advantage in network deployment. Normally, such unlicensed
7 bands wireless technologies have MAC layer functionalities which enable coexistence with various
8 wireless systems; CSMA/CA of Wi-Fi and frequency hopping of Bluetooth, for examples. These
9 functionalities make network deployment simple, however, stable quality of service is difficult to
10 keep with such simple schemes especially when many wireless systems share the same wireless
11 resources. It is because each wireless system, which consists of multiple wireless stations and is
12 managed by a base station, works independently based on own probabilistic approach without
13 any coordination with the other wireless systems. In the factory IoT usage scenarios, many
14 wireless systems work in a broad area which is not separated completely in terms of wireless
15 resource, and such competition of wireless systems in unlicensed bands are unavoidable.

16 For mitigating the impact of the competition in unlicensed bands, it is necessary to coordinate
17 wireless systems in factory as much as possible. To assign channel of each wireless system
18 according to required bandwidth of applications is one of simple examples of the coordination.
19 Both of distributed manner and centralized manner can be applied for the coordination, however,
20 wireless systems need to be connected to the same wired network for exchanging control data.
21 Wired network of the factory IoT needs to handle the control data for the wireless system
22 coordination in addition to application data of each wireless systems. Figure 21 illustrates
23 overview of centralized type of coordinated wireless systems.

24

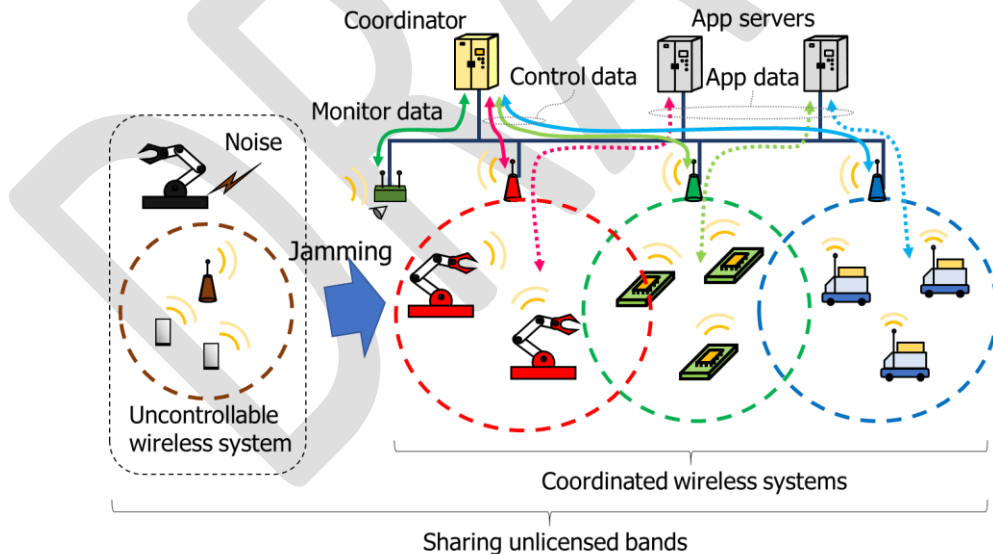

25

26

Figure 21 Overview of coordinated wireless systems

27

28 Ideally, all the wireless systems in an area should be connected to the same network and
29 coordinated together. However, it is difficult to root out uncontrollable wireless systems in all the
30 cases and noise from non-communication devices like machine tools also need to be taken into
31 consideration. It is necessary to monitor wireless channels, analyze behavior of such interferers

1 and estimate available wireless resources accurately for allocating wireless resources according
2 to demands of applications. Wired network of the factory IoT needs to handle the monitoring data
3 as well.

4
5 As latency of control data exchange and monitoring data exchange among wireless systems
6 becomes lower, more efficient wireless system coordination becomes available. To improve
7 latency of bridging is one of issues for the efficient coordination of the wireless systems.
8
9

10 **Enhancements of IEEE 802 technologies for the future**

11 Within factory networks, applications need to meet various requirements and provide QoS at
12 application level. Different types of data flow between factory applications and network nodes,
13 such as devices, access points, gateways, switches, bridges, and routers. To keep QoS across the
14 factory network with priority control, data attributes are introduced at network nodes. Data
15 attributes are defined based on the type of application and its corresponding requirements.
16 These attributes are attached to the data field and mapped to appropriate traffic types. Setting
17 data attributes for factory applications rather than extending traffic types is essential for
18 backward compatibility to existing standards.


19 Coordination mechanism is required in order to ensure end-to-end QoS provisioning over the
20 entire factory network in the brownfield where various facilities and equipment with different
21 standards, of different generations, and by different vendors coexist. The following control
22 functions over the wired/wireless network are anticipated for coordination purpose.

- 23 1. Control of data flows across wireless links.
- 24 2. Joint coordination of frequency channel and forwarding paths.
- 25 3. Spatial control for wireless links, i.e. power and antenna directivity.

26 **Network Scenario**

27 Coordination is achieved by a coordinator managing the factory network. As illustrated in Figure
28 22, the Bridge/AP of each local area network (LAN⁷) is deployed for a specific application. L2
29 data frames generated from devices in the same LAN need to be forwarded with the same data
30 attributes towards the same application server, and vice versa. The control policy could be
31 provided by the coordinator for each LAN for the ease of implementation, rather than provided
32 on individual device basis.


⁷ Covering both Basic Service Set (BSS) for AP and LAN segment for bridge.

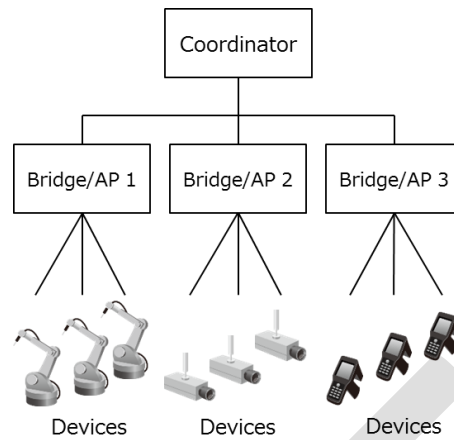

1
2

Figure 22 coordinator on the plain network scenario

3 A more flexible scenario is illustrated in Figure 23, where each application needs to be
 4 supported across multiple Bridge/APs and a single Bridge/AP is serving multiple applications
 5 simultaneously. The data frames for an application may be sourced from different LANs which
 6 could be aggregated and forwarded in bulk size. The control policy should be provided on
 7 individual application basis and the policy template can be created according to application
 8 requirements.

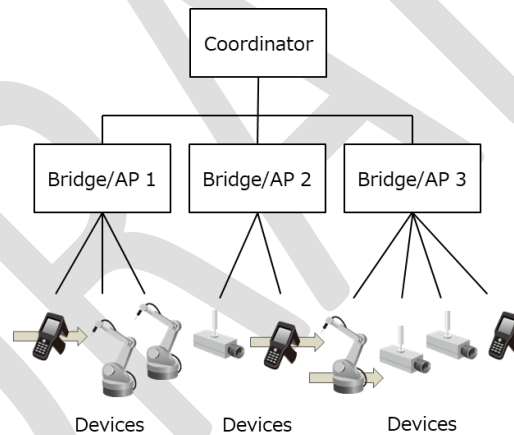

9
10

Figure 23 coordinator on the flexible network scenario

11 The coordinator cannot manage or configure each system locally and it does not have control
 12 over the changing wireless environment. However, it can set policies for transmission of
 13 application data in order to tolerate the degradation in the network due to these changes.
 14 Wireless link or path quality is changing rapidly (from milliseconds to seconds) due to multipath
 15 fading and shadowing in the closed environment of factories where human, product and
 16 material handling equipment e.g. forklift trucks and AGVs (automated guided vehicles) are
 17 moving. It is required to reserve minimum bandwidth for priority application by enhancing
 18 bridge functions, despite the degradation in the local link quality. Also for the purpose of
 19 reliability, queueing and forwarding mechanisms for redundancy need to be defined to use data
 20 attributes over bridges. The factory network has to ensure, assisted by coordinator
 21 functionalities, that bulk data transferred to wireless devices does not impact the transmission
 22 of the low-latency real-time messaging and streaming data.

1 For coordination and control of factory network made up of several tens of systems tightly, huge
2 network and computing resources would be required. Tight control directly conducted by the
3 coordinator is impractical. This implies the necessity for hierarchical control consisting of (1)
4 centralized coordinator which implements the global control for coordination of independent
5 systems to satisfy requirements of each factory applications, and (2) the distributed
6 coordination agent on each individual Bridge/AP which serves as local control for each system
7 according to control policy. The control policy implies how radio resources of time, frequency,
8 and space are utilized to optimize operation of entire network in a factory.

9 To realize the hierarchical control, more information need to be concentrated on local systems
10 to operate autonomously with quick response. For this purpose, the following three items need
11 to be defined.

- 12 A) Control policy: messages and interfaces between a coordinator and various systems.
- 13 B) Information on wireless environment: link/path quality.
- 14 C) Data attributes: common information including various requirements, e.g. data rates (or
15 data size at an application level and data frequency), latency, affordability of packet loss.
16 Traffic types expressed by three bits may not be sufficient for factory applications.

17 **Key to close the gap**

18 There are two approaches to realizing coordination depending on situations where single-
19 standardized but decentralized and independent wireless systems coexist, and heterogenous
20 wireless and wired systems coexist in the same space.

21 **Coordination of single-standardized but decentralized and independent wireless systems**

22 Technically, coordination of single-standardized system can work efficiently because a
23 coordinator specifically directs frequency, timing and output to be used for each transmitter if
24 each control sequences are defined in the standard.

25 **Coordination of heterogenous wireless and wired systems**


26 The control policy is exchanged vertically and may be left to individual vendor to implement.
27 Information on wireless environment is handled within each system and may be a vendor
28 specific matter. Data attributes are common information to be shared among systems provided
29 by multiple vendors and need to be standardized for the brownfield of factory environment. In
30 addition, data attributes may be extensionally defined, for example, by using Tag Protocol
31 Identifier (TPID) and VLAN tag in IEEE Std 802.1Q-2014 [6].

32 Besides common data attributes, a network reference model for flexible factory IoT network
33 should be a generic representation which includes multiple network interfaces, multiple
34 network access technologies, and multiple applications. The network reference model (NRM) in
35 Draft Standard IEEE P802.1CF [7] is appropriate for this purpose and can be used to generalize
36 the concept of coordinator and to explain how data attributes are managed as informative
37 description as well. The minimum enhancement could be achieved by creating a factory profile

1 consisting of the reference model and data attributes. Detail investigation is required if any
2 protocols shall be added.

3 The aforementioned network scenarios in factory can be mapped to 802.1CF NRM as depicted
4 in Figure 24. Bridge/AP represents the node of attachment (NA) providing wired/wireless access
5 through R1 to the terminals (devices). L2 data frames with common data attributes are
6 aggregated and forwarded to the second level bridges, represented as backhaul (BH) through R6
7 datapath interface. The coordinator is located in the access network control (ANC) providing
8 control policy to the underlay bridges and APs through R5 and R6 control interfaces⁸.

9

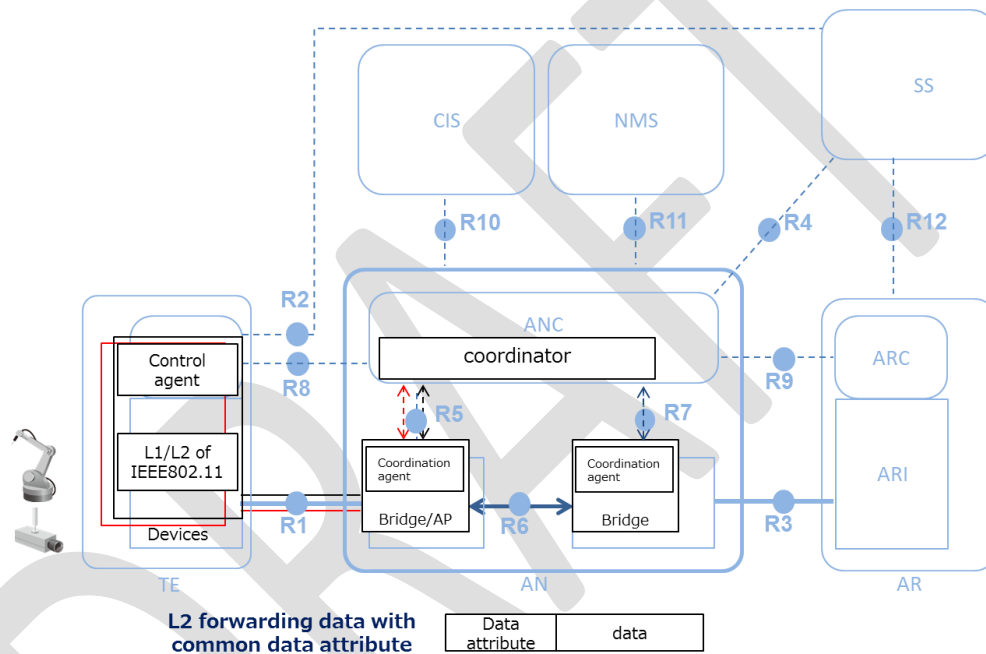

10

11

Figure 24 mapping factory network to 802.1CF NRM

12 The coordinator fitting well in the role of ANC provides enhancements to 802.1 protocols and
13 procedures, e.g. SRP, for time sensitive applications. More complex TSN use cases benefit from
14 the complete knowledge of streams in the network, especially for the one going through
15 wireless medium, which is stored and processed by the coordinator.

16 In the case that accumulated latency cannot be guaranteed as promised due to e.g. radio
17 fluctuation, the coordinator may respond quickly based on its knowledge of the global network
18 resources and adjust parameter settings amongst all bridges/APs. Control policy shall be
19 provided to keep sufficient radio resources for the short-term fluctuation and also be provided
20 by the coordinator to re-allocate network resources adaptively to establish stable streams even
21 on wireless medium. It ensures that the end-to-end QoS provided by the factory network meet
22 the different requirements from the wide variety of factory applications.

23



⁸ Refer to Clause 5 of Draft IEEE Standard P802.1CF/D2.1 [7] for detailed information of network reference model (NRM).

1
2

3 **Conclusions**

4 A factory is called as brownfield where various facilities and equipment with different standards,
5 of different generations, and by different vendors, coexist in the same sites. There is also a
6 variety of data from factory applications flowing into network nodes and data attributes
7 attached to the data field that need to be introduced for priority control at each node. The
8 hierarchical control consisting of global control for coordination of independent systems and
9 distributed and local control for each system according to control policy is promising to adapt to
10 short-term fluctuation of wireless link and to optimize wireless resources of entire network in a
11 factory. Such operation is explained by network reference model to configure a flexible factory
12 profile.

13 Two approaches to realizing coordination have been described depending on situations where
14 single-standardized but decentralized and independent wireless systems coexist, and
15 heterogenous wireless and wired systems coexist in the same space. Each of them will be
16 efficient and both will be better to improve performance.
17

18 **Citations**

- 19 [1] IEC 62657-1, "Industrial communication networks – Wireless communication networks –
20 Part 1: Wireless communication requirements and spectrum considerations".
21 [2] IEC 62657-2, "Industrial communication networks – Wireless communication networks –
22 Part 2: Coexistence management".
23 [3] draft version of IEC 62657-4, "Industrial communication networks - Wireless
24 communication networks - Part 4: Coexistence management with central coordination
25 of wireless applications"
26 [4] Robert J. Kosinski, "A Literature Review on Reaction Time,"
27 <http://www.cognaction.org/cogs105/readings/clemson.rt.pdf>
28 [5] 1-17-0011-02-ICne-wired-wireless-convergence-for-factory-iot.pdf,
29 <https://mentor.ieee.org/802.1/documents>
30 [6] IEEE Std 802.1Q-2014 (Revision of IEEE Std 802.1Q-2011) - IEEE Standard for Local and
31 metropolitan area networks--Bridges and Bridged Networks,
32 <https://ieeexplore.ieee.org/document/6991462/>
33 [7] Draft IEEE Std P802.1CF/D2.1, <https://1.ieee802.org/omniran/802-1cf/>
34