

Project: IEEE P802.15 Working Group for Wireless Personal Area Networks (WPANs)

Submission Title: [revised capability bits for MCSs]

Date Submitted: [March 18, 2007]

Source: [Fumihide Kojima, ⁽¹⁾, Chang-Woo Pyo, Zhou LAN, Chin Sean Sum, Shuzo Kato]

Company [National Institute of Information and Communications Technology (NICT)]

Address¹[3-4 Hikari-no-oka, Yokosuka-shi, Kanagawa 239-0847, Japan]

Voice¹:[] , FAX¹: []

E-Mail¹:[f-kojima@nict.go.jp]

Re: [In response to TG3c comments (IEEE P802.15-08-0020-05-003c)]

Abstract: [Comment resolutions]

Purpose: [To be considered in TG3C baseline document.]

Notice: This document has been prepared to assist the IEEE P802.15. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.


Release: The contributors acknowledge and accept that this contribution becomes the property of IEEE and may be made publicly available by P802.15.

Revised Resolution to Comment #9

- Comment #9
 - How do we encode all of the supported data rates.
- Resolution
 - All of the supported data rates for each PHY case are encoded as following
 - 3 bits for SC case
 - 1 bit for AV-OFDM case
 - 4 bits for HSI-OFDM case
 - As for SC case, 10 MCSs are categorized into 8 (2 for modulation scheme and 4 for coding scheme), and encoded by 3 bits in the capability IE

Capability bits in SC case

- 10 MCSs are categorized into 8 (2 for modulation scheme and 4 for coding scheme), and encoded by 3 bits in the capability IE
 - 1 bit for 8QAM&16QAM capability
 - 2 bits for coding capability as for LDPC

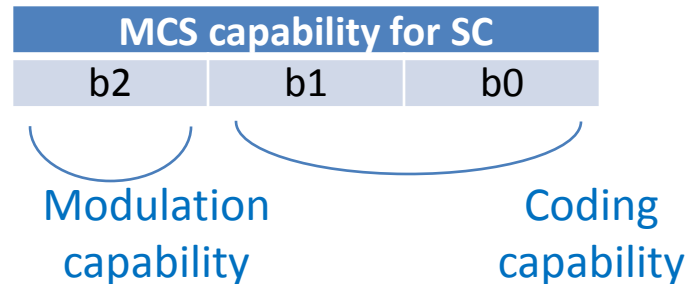

Modulation capability	[b2]
BPSK + QPSK	0
BPSK + QPSK + 8QAM + 16QAM	1
Coding capability	[b1-b0]
RS (255,239)	00
RS (255,239) + LDPC (576,288) + LDPC (576,432) + LDPC (576,504)	01
RS (255,239) + LDPC (1440,1344)	10
RS (255,239) + LDPC (576,288) + LDPC (576,432) + LDPC (576,504) + LDPC (1440,1344)	11

Appendix

MCSs in SC PHY case

MCSs in SC

MCS Class	MCS ID	PHY-SAP rate (Mbs)	Modulation Scheme	Spreading factor	FEC Type	FEC Rate
Class 1	LR1	50.6(CR)/379.6/ 759.2/1518.4(MLR)	p/2-BPSK/(G)MSK	32/4/2/1	RS(255,239)	0.937
	LR2	607.5/1215.0	p/2-BPSK/(G)MSK	2/1	LDPC(576,432)	0.750
	LR3	810.0	p/2-BPSK/(G)MSK	1	LDPC(576,288)	0.500
Class 2	MR1	1620.0	p/2-QPSK	1	LDPC(576,288)	0.500
	MR2	2430.0	p/2-QPSK	1	LDPC(576,432)	0.750
	MR3	2835.0	p/2-QPSK	1	LDPC(576,504)	0.875
	MR4	3024.0	p/2-QPSK	1	LDPC(1440,1344)	0.933
	MR5	3036.7	p/2-QPSK	1	RS(255,239)	0.937
Class 3	HR1	4555.1	p/2-Star 8QAM	1	RS(255,239)	0.937
	HR2	6073.4	p/2-16QAM	1	RS(255,239)	0.937
Class 4	OOK1	1518.4/759.2	OOK	1/2	RS(255,239)	0.937
4	DRB1	3036.7	Dual Rail Bipolar	1	RS(255,239)	0.937