

IEEE P802.15
Wireless Personal Area Networks

Project	IEEE P802.15 Working Group for Wireless Personal Area Networks (WPANs)	
Title	Proposed Text on $\pi/2$ BPSK and (G) MSK description	
Date Submitted	September, 9 th , 2008	
Source	[R. Funada]	Voice: [[+81-46-847-5055] Fax: [[+81-46-847-5440] E-mail: [funada@nict.go.jp]
Re:	802.15.3c Teleconference Meeting	
Abstract	IEEE 802.15 Task Group TG3c Comment Resolution	
Purpose	Resolutions for the $\pi/2$ BPSK and (G) MSK description	
Notice	This document has been prepared to assist the IEEE P802.15. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor acknowledges and accepts that this contribution becomes the property of IEEE and may be made publicly available by P802.15.	

12.2.2.1.1 $\pi/2$ BPSK, Pre-coded (G)MSK

The $\pi/2$ -shift BPSK ($\pi/2$ BPSK) modulation uses two phases separated by π radian, as illustrated in Figure 189(a). The $\pi/2$ phase shift is made counter-clockwise to eliminate the π phase shift. Figure 189(a) shows signal constellation of $\pi/2$ BPSK signals. As shown in Figure 189(a), the black dot indicates the initial constellation point on the horizontal axis. In the next bit timing, the black dot is rotated to either hollow dot on the vertical axis. If b_0, b_1, \dots, b_{n-1} are unipolar bits to be transmitted, they are mapped to bipolar bits d_0, d_1, \dots, d_{n-1} , where bit “0” is mapped on “-1” and bit “1” on “+1”. The bipolar bit stream is then mapped onto constellation points z_n as

$$z_n = j^n \cdot d_n \quad n = 0, 1, \dots, N,$$

where j denotes $\pi/2$ phase rotation. This means the phase difference between two consecutive bits is always $\pi/2$. Note that the normalization factor is 1 for $\pi/2$ BPSK and z_0 is defined in 12.2.3.

Pre-coded MSK are continuous phase modulation schemes by applying differential pre-coding before the MSK modulation. Note that the MSK constellation mapping is approximately equivalent to the $\pi/2$ -BPSK constellation as shown in Figure 189(b). The differential pre-coding is defined by

$$a_n = d_n \cdot d_{n-1}, \quad n = 0, 1, \dots, N-1,$$

where $d_{-1} = 1$. The differential pre-coded bits are then fed to MSK modulator. The differential pre-coded bits a_n and the previous constellation point z_{n-1} , are encoded to the constellation points z_n for the MSK as shown below.

$$z_n = z_{n-1} \cdot (j \cdot a_n), \quad n = 0, 1, \dots, N,$$

where, z_{-1} is $-j$. This encoding means the odd bits are mapped onto the real axis and the even bits are mapped onto the imaginary axis, as shown in Figure 189(b). Hence it is equivalent to the $\pi/2$ -BPSK constellation as shown in Figure 189(a) (Note that the normalization factor is 1). The maximum phase shift of MSK is equal to $\pi/2$ radian. The maximum phase shift of GMSK is equal to or less than $\pi/2$ radian due to Gaussian filtering. Note that filtered waveform of each modulation shall satisfy Transmit PSD mask as in 12.2.7.4.

(For more detailed information on the equivalence of $\pi/2$ BPSK and pre-coded (G)MSK, please refer <http://kom.aau.dk/project/sipcom/SIPCom05/sites/sipcom8/courses/SIPCom8-2/notes.pdf> page160).

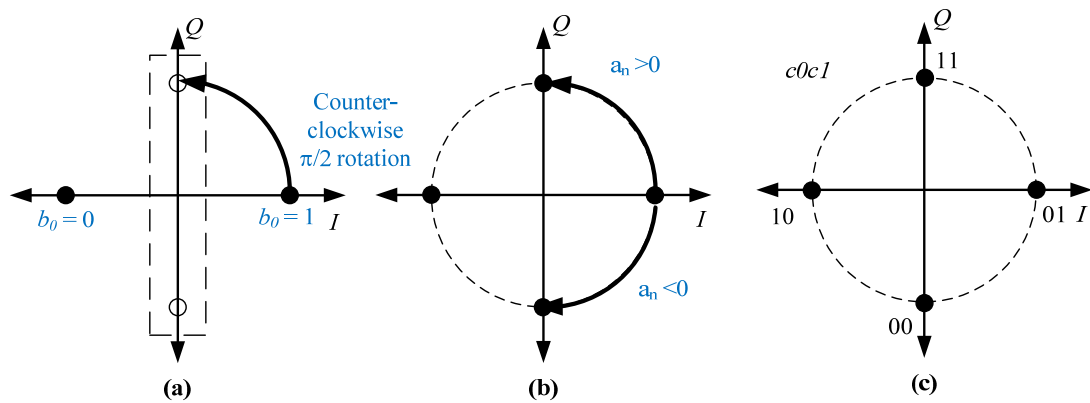


Figure 189—Constellation maps for modulation schemes: (a) $\pi/2$ BPSK, (b) pre-coded MSK/GMSK, (c) $\pi/2$ QPSK