

1 January, 2010 IEEE P802. **15-10-0011-01-004g**
2 IEEE P802.15 Wireless Personal Area Networks
3

4 Project	IEEE P802.15.4G Working Group for Wireless Personal Area Networks
5	
6 Title	802.15.4G SUN Device Classifications
7	
8 Date	January10,2010
9	
10 Source	Mark Wilbur E-mail: mwilbur@aclara.com
11	
12 Contributors	Benjamin A. Rolfe/Blind Creek Associates, ben@blindcreek.com 13 SUM Chin Sean, sum@nict.go.jp 14 Steve Shearer/Independent, shearer_inc@yahoo.com 15 Emmanuel Monnerie/Landis+Gyr, emmanuel.monnerie@landisgyr.com 16 Clinton Powell/SCE, cpowell@ieee.org 17 Robert Mason/USE/Elster, robert.t.mason@us.elster.com 18 Pat Kinney/Kinney Consulting LLC, pat.kinney@kinneyconsultingllc.com
19	
20 Re	Task Group 15.4g
21	
22 Abstract	This document is a draft of an amendment for Clause 5, 6, 7 containing 23 the operational detail of the Device Classification Operation
24	
25 Purpose	Review
26	
27 Notice	This document has been prepared to assist the IEEE P802.15. It is offered as a basis for 28 discussion and is not binding on the contributing individual(s) or organization(s). The material in this 29 document is subject to change in form and content after further study. The contributor(s) reserve(s) the 30 right to add, amend or withdraw material contained herein.
31	
32	
33 Release	The contributor acknowledges and accepts that this contribution becomes the property 34 of IEEE and may be made publicly available by P802.15.
35	
36	
37 Draft	
38	
39	
40	
41	
42	
43	
44	
45	
46	
47	

48 **5.XXX Smart Utility Networks Summary**

49 A true modern Smart Grid enables multiple applications to operate over a shared,
50 interoperable network, similar in concept to the way the Internet works today. To put this in
51 perspective, the electrical network in the US alone is comprised of more than 300,000,000
52 metering endpoints, 14,000 transmission substations, 4,500 large substations for distribution, and
53 3,000 public and private owners**5.XXX Device Class Components of the IEEE 802.15.4**
54 **WPAN**

55 In order to ensure that the wireless grid communications requirements have been addressed in the
56 most efficient manner possible, this standard has defined three unique device classes to provide
57 the capability of utilizing the most efficient methods of data transmission. The device class
58 boundaries have been established based on the expected volumes of data to be transmitted during
59 a typical 24 hour period. Each device class utilizes unique signaling attributes in order to
60 maximize overall system performance.


61 Device Class A is defined as a class of devices forming a network capable of efficiently
62 supporting data throughput for an average greater than 10 Million symbols per supported node
63 during a single continuous 24 hour period.

64 Device Class B is defined as a class of devices forming a network capable of efficiently
65 supporting data transfer for an average range of 10 Thousand symbols through 10 Million
66 Symbols per supported node during a single continuous 24 hour period.

67 Device Class C is defined as a class of devices forming a network capable of efficiently
68 supporting data transfer on an average of less than 10 Thousand symbols per supported node
69 during in a single continuous 24 hour period.

70 **7.XXX Common Signaling Mode (CSM)**

71 A single, unique common signaling mode (CSM) is established for each regulatory domain to
72 ensure all devices within each device class share a set of common signaling attributes. All SUN
73 devices will periodically listen for RTJ commands using the PHY attributes defined by the CSM
74 for the supported device class during periods of inactivity. The device will utilize the passive
75 channel scan capability defined in 7.5.2.1.3, as extended for P802.15.4g to include a scan for the
76 Request to Join (RTJ) command. Figure Z1 provides an example that could be used to define the
77 maximum number of scans required to capture the RTJ command. The required minimum
78 duration and interval for RTJ scanning is defined in Table A in Annex H.

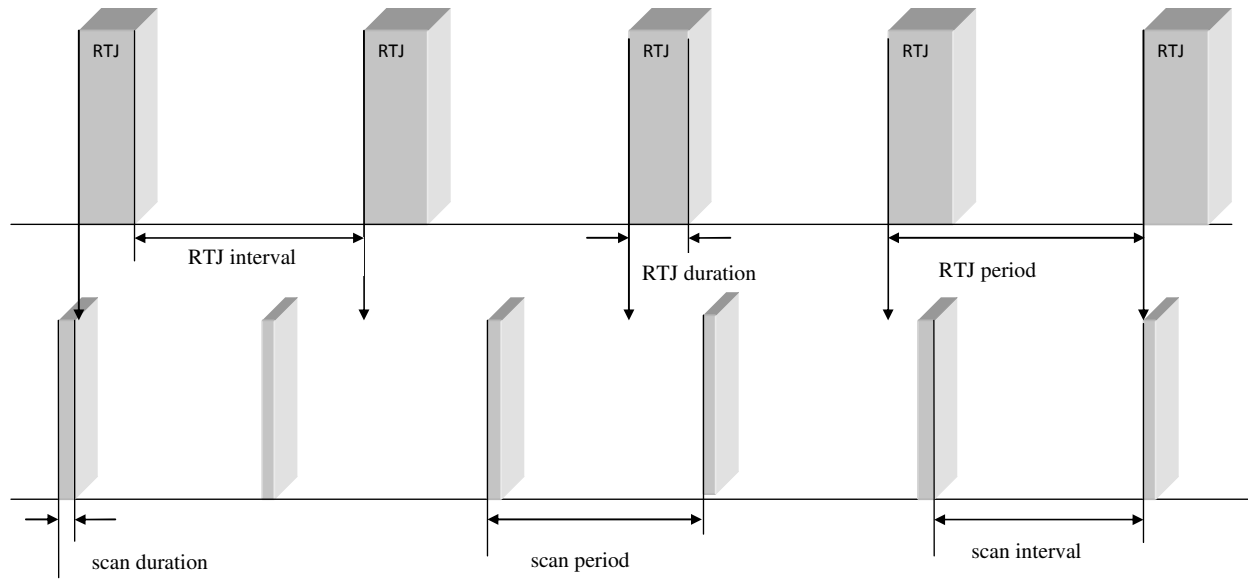

(k) = Integer

scan interval = (k) beacon period

$$\# \text{ of scans to converge} \leq \frac{\text{RTJ period}}{\text{scan duration}}$$

79

FIGURE 2

Example

Beacon Period mS	1000	BI+BD
Beacon Duration mS	100	
Beacon Interval mS	900	
Scan Period mS	1015	SI+SD
Scan Duration mS	15	
Scan Interval mS	1000	K*BP
k	1	
Number of scans	66.67	
Max Scan Time S	676.67	SP*nS

$$\text{Average scan time} = \text{Max Scan Time} / 2$$

80

81 **Figure z1**

82

83

84

85

86

87 **7.XXX Capabilities Message referred to as CM**

88 A list of all supported sets of communication attributes will be stored in the PHY PIB (6.4.2
89 Table 23). Following the reception of an RTJ command, an associated device will transmit a
90 Request to Join Response (RTJR) command. Following that, the associated device should
91 transmit a MAC data frame containing the current set of PHY operating modes using the CSM
92 within 100mS of receiving the RTJ command.

93 The device attempting to join the network will set its communications attributes to match the
94 data contained in the payload of the received CM message. The joining device will then execute
95 the association process, as defined in 7.5.3.1.

96 Coordination of this type is performed by an upper layer network management entity (NME).
97 The following text describes message structures which could be implemented by such an NME.
98 The capabilities exchange is based on the PHY descriptor content. For each PHY operating
99 mode, there is a unique PHY ID value assigned. For modes defined P802.15.4g, only the PHY ID
100 value needs to be exchanged between P802.15.4g-compliant devices. The following text is a
101 means to construct a unique PHY ID for each extended PHY operating mode defined, so that a
102 short exchange can be accomplished between P802.15.4g-compliant devices with compatible
103 implementations. To support integration of previously-deployed non-P802.15.4g-compliant devices
104 (which may be capable of implementing a PHY operating mode, as described by a set of generic
105 PHY parameters, the exchange format supports transferring the entire description also.

106 The capabilities message includes a capabilities vector (CV), shown in Figure z2 used to
107 describe one or more supported PHY operating modes.

Octet:	1	Variable
	CV-Length	PHY Description List

108 **Figure z2**

109 The CV-Length field indicates how many PHY descriptions are contained in the PHY
110 Descriptions list field. Each element of the list begins with a PHY ID which indicates how the
111 PHY is described. When both devices are P802.15.4g-compliant, the PHY mode can be fully
112 defined by the PHY ID alone and the PHY parameter vector is not required. A bit in the PHY ID
113 signals if the parameter structure is included. The PHY ID is structured as shown in figure Z3

Bits:	1	1	TBD	24	GPM-Description
	Standard/Ext	Short/Full Desc	Short ID	OUI (if Ext set)	
	Control bits		GPM-ID		

114 **Figure Z3**

115

116 **7.XXX Capabilities Message (CM) (cont.)**

117
118 The Standard/Ext bit indicates if the PHY description is fully defined in P802.15.4g or if it is an
119 implementation/vendor specific mode. If the PHY description is Standard, then only the Short ID
120 field is present. If this bit is set to indicate an extension PHY mode, then the Organizationally
121 Unique Identifier (OUI) field is included (which is part of the MAC address of every 802
122 device); this enables the device to identify implementation-specific modes in a way assured to be
123 unique.
124 The Short/Full description field indicates if the entire PHY description structure is included in
125 this list element, or if only the PHY ID is included. This enables exchanging the complete PHY
126 description.

127 An example of a full MAC frame for capabilities exchange is shown in figure z4

Octets:Variable	1	2	5	2+		2/4
Data Frame	26	GPM-S1 ID	GPM-ExA ID	GPM-ExB ID	Full Description	
MHR	CV-Length	GPM-ID-List				
MHR	MAC Payload					FCS

128 **Figure z4**

129 When two devices have exchanged capabilities information, the NME may compare PHY
130 capabilities sets and determine the mutually supported modes. Other factors, such as channel
131 conditions, would normally be considered in selecting an optimal mode for network operation

132

133

134

135

136 .

137

138

139

140

141

142 **7.XXX Request to Join (RTJ) New MAC Command**

143 The request to join command allows a low energy discovery mechanism to be used by a device
144 to advertise to other devices that it wishes to and is capable of joining an existing PAN (beacon
145 enabled or non-beacon enabled). This command shall be sent by an unassociated device that
146 wishes to discover and associate with a PAN.

147 The RJT command is formatted as illustrated in figure z5

Octets (see 7.2.2.4)	1
MHR fields	Command Frame Identifier (see Table 82)

148 **Figure z5**

149 **MHR fields**

150 The Source Addressing Mode subfield of the Frame Control field shall be set to three (64-bit
151 extended addressing). The Destination Addressing Mode subfield of the Frame Control field
152 shall be set to two (i.e., 16-bit short addressing).

153 The Frame Pending subfield of the Frame Control field shall be set to zero and ignored upon
154 reception. The Acknowledgment Request subfield and Security Enabled subfield shall be set to
155 zero.

156 The Destination PAN Identifier field shall contain the broadcast PAN identifier (i.e., 0xffff). The
157 Destination Address field shall contain the broadcast short address (i.e., 0xffff).

158

159

160

161

162

163

164

165

166

167 **7.XXX Request to Join Response (RTJR) New MAC command**

168 The request to join response is issued by an associated device upon receipt of the RTJ command.
169 The RTJR acknowledges the request and provides a capabilities payload to the joining device,
170 thus conveying information on the current PHY operating mode.

171 The RTJ command is formatted as illustrated in figure z6

Octets (see 7.2.2.4)	1
MHR fields	Command Frame Identifier (see Table 82)

172 **Figure z6**

173 **MHR fields**

174 The Source Addressing Mode subfield of the Frame Control field shall be set to three (64-bit
175 extended addressing). The Destination Addressing Mode subfield of the Frame Control field
176 shall be set to three (i.e., 64-bit extended addressing).

177 The Frame Pending subfield of the Frame Control field shall be set to zero and ignored upon
178 reception. The Acknowledgment Request subfield and Security Enabled subfield shall be set to
179 zero.

180 The Destination PAN Identifier field shall contain the PAN identifier assigned to the responding
181 device if it is a PAN coordinator, or set to the broadcast PAN ID (0xffff) if the device is not a
182 PAN coordinator. The Destination Address field shall contain an extended address equal to the
183 source address of the received RTJ command.

184

185

186

187


188

189

190

191

192

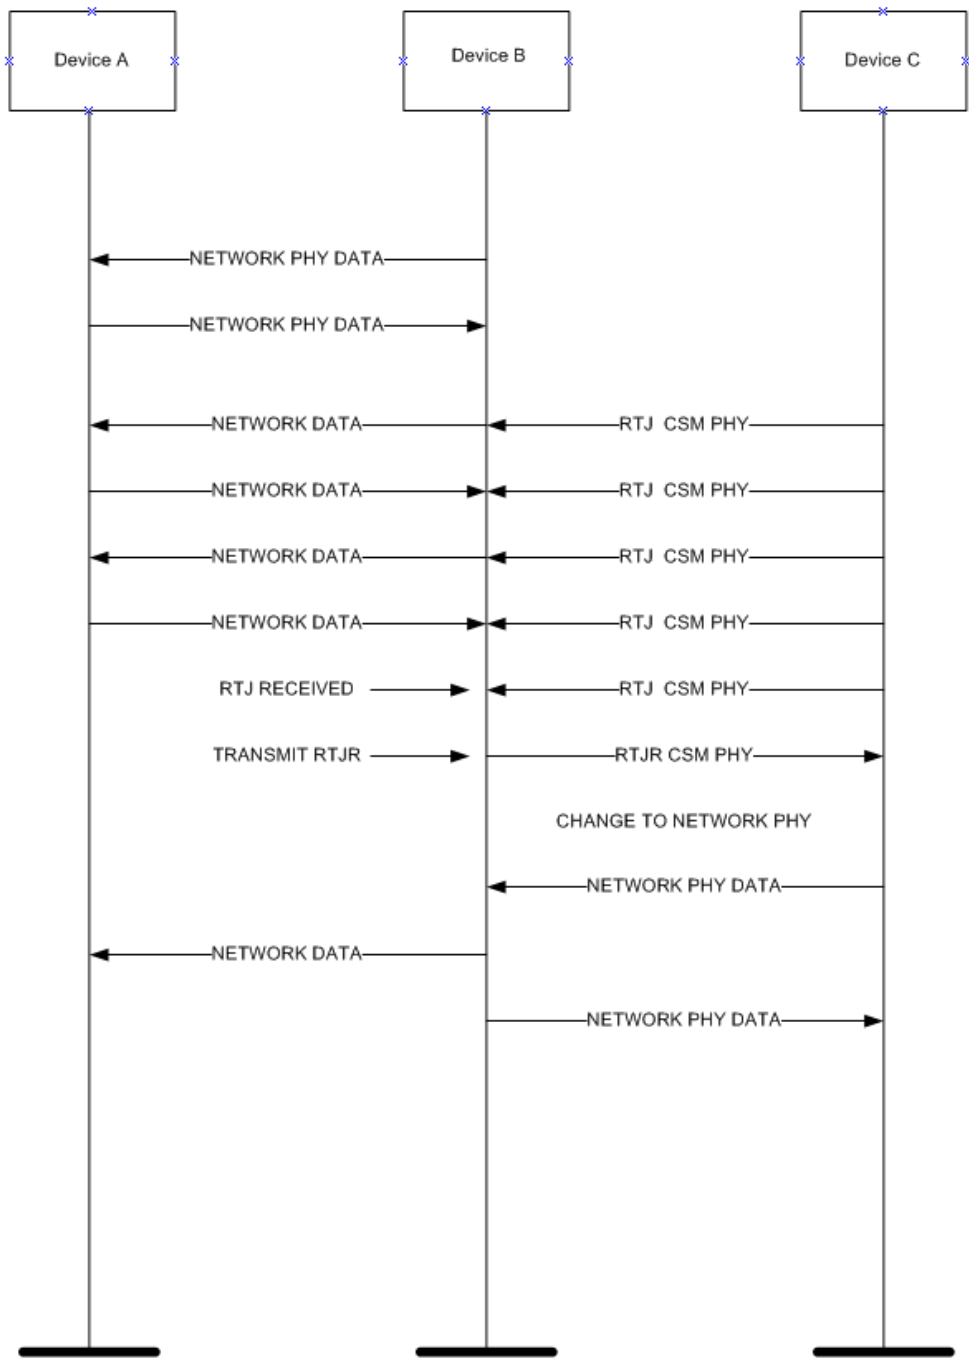

193

194

195

Figure 2

196

197

198 Annex H Table A

Index	Class	Band	Domain	Mod	Rate	BT/FFT	BW	DataRate	SD	SI
1	C	220-222	US	GFSK	1.00	0.5	12.5kHz	2.4kb/s	10	200
2	A	400-430	Japan	QPSK	0.50	16	200kHz	100kb/s	10	1500
3	B	400-430	Japan	GFSK	1.00	0.5	200kHz	50kb/s	10	1500
4	A	426-467	Japan	QPSK	0.50	16	200kHz	100kb/s	10	1500
5	B	426-467	Japan	GFSK	1.00	0.5	200kHz	50kb/s	10	1500
6	C	450-470	US	GFSK	1.00	0.5	12.5Khz	2.4kb/s	10	200
7	A	470-510	China	QPSK	0.50	16	200kHz	100kb/s	10	1500
8	B	470-510	China	GFSK	1.00	0.5	200kHz	50kb/s	10	1500
9	A	863-868	Europe	QPSK	0.75	8	100kHz	50kb/s	10	500
10	B	863-870	Europe	GFSK	1.00	0.5	200kHz	50kb/s	10	1500
11	A	868-870	Europe	QPSK	0.50	16	200kHz	100kb/s	10	1500
12	C	901-902	US	GFSK	1.00	0.5	12.5Khz	2.4kb/s	10	200
13	A	902-928	US	QPSK	0.50	16	200kHz	100kb/s	10	1500
14	B	902-928	US	FSK	1.00	0.5	200kHz	50kb/s	10	1500
15	A	950-956	Japan	QPSK	0.50	16	200kHz	100kb/s	10	1500
16	B	950-956	Japan	GFSK	1.00	0.5	200kHz	50kb/s	10	1500
17	A	2400	US	QPSK	0.50	16	200kHz	100kb/s	10	1500

199

200

201

202

203

204

205

206

207

208

209

210

211

212 6.4.2 PHY PIB attributes TABLE 23

213 PHY Parameter Table

Attribute	Type	Valid Range	Description
ClassIndex	Integer (1)	1 -255	
PHYType	Enumeration	FSK, OFDM, DSSS	Content of following parameters may vary by PHY type.
ModOrder	Enumeration	{2...n}	{2,4} for defined FSK modes
FSKModIndex	Integer	0-45	0.25- 2.5 in steps of 0.05
GFSKBT	Enumeration	BT_0.5 BT_1.0 BT_OFF	Gaussian Pulse Shaping used. If BT_OFF no pulse shaping filter (FSK)
SymbolRate	Integer	1kHz - 1MHz	Integer 1Hz steps. (3 octets will give a 1 to 16MHz range)
ChannelSpacing	Integer	1KHz to 10 MHz	Integer Hz steps (3 octets will give a 1 to 16MHz range)
FirstChannelFreq	Integer	1 Hz to 37.7GHz	Specifies the center frequency of the first channel in the list in 10Hz units
NumChannels	Integer	1 to 65000	Number of channels in the band/sub-band described (Note 1)

214