
IEEE P802.15
Wireless Personal Area Networks

Project	IEEE P802.15 Working Group for Wireless Personal Area Networks (WPANs)		
Title	Proposed Resolution for MR-FSK Channel Parameters for the License-Exempt 902 - 928 MHz ISM Band		
Date Submitted	[24 May, 2010]		
Source	[Steve Jillings] [Semtech Corporation] [address]	Voice: Fax: E-mail:	[+1 (805) 480-2196] [+1 (805) 498-3804] [sjillings@semtech.com]
Re:			
Abstract			
Purpose	Methods of defining the ACP or modulation bandwidth requirements of Clause 6 Table 1a		
Notice	This document has been prepared to assist the IEEE P802.15. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.		
Release	The contributor acknowledges and accepts that this contribution becomes the property of IEEE and may be made publicly available by P802.15.		

Background

Currently both FSK and GFSK modulation is permitted for the MR-FSK PHY in the North American 902-928 MHz License-exempt ISM band with a spectral limiting method defined in terms of adjacent channel attenuation or adjacent channel power level of -20 dB to introduce a degree of spectral efficiency.

Table 1a of P802.15.4g/D1 defines the mandatory data rate parameters for this frequency band as tabulated below:

Parameter	Specification	Units
Data rate	50	kb/s
Modulation	2-FSK / GFSK (BT = 0.5)	-
Modulation Index	1.0	-
Channel Spacing	200	kHz

From a regulatory point of view, operation within the 902 – 928 MHz band in the United States or Canada, as defined above, requires compliance with FCC 15.249 or FCC 15.247 within the United States and RSS-210 within Canada.¹

As the channel spacing has been defined at 200 kHz and for most practical applications the required ERP will exceed 50 mV/m measured at a distance of 3 m, operation within this frequency band will require compliance with either FCC 15.247(a)(1) or RSS-210 Annex 8.1(c).

The purpose of this document is not to define a limit for the adjacent channel attenuation, but to highlight methods of measurement, from which a suitable attenuation level may be defined.

So as to ensure no untoward bias to any silicon vendors, a Rhode and Schwarz VSG has been used to generate PN15 modulated waveform examples.

¹ It is noted that similar regulatory requirements apply in North, Central and South America

Methods of Measuring Adjacent Channel Attenuation

FCC Publication DA 00-705

The FCC defines the recommended method of measurement of the 20 dB bandwidth in publication DA 00-705. Although the test method is used to determine whether the bandwidth is greater or less than 250 kHz and hence defining both the maximum permissible output power and minimum number of hopping channels that must be implemented, this method could be easily adopted as to the determination of adjacent channel attenuation.

The advantage of this method is that it is consistent with existing regulations.

To summarize the procedure, the spectrum analyzer is set to a span of approximately 2 to 3 times the 20 dB bandwidth. Resolution bandwidth is set to $\geq 1\%$ of the 20 dB bandwidth and video bandwidth to \geq of the resolution bandwidth. A peak detector is used in conjunction with the max. hold function.

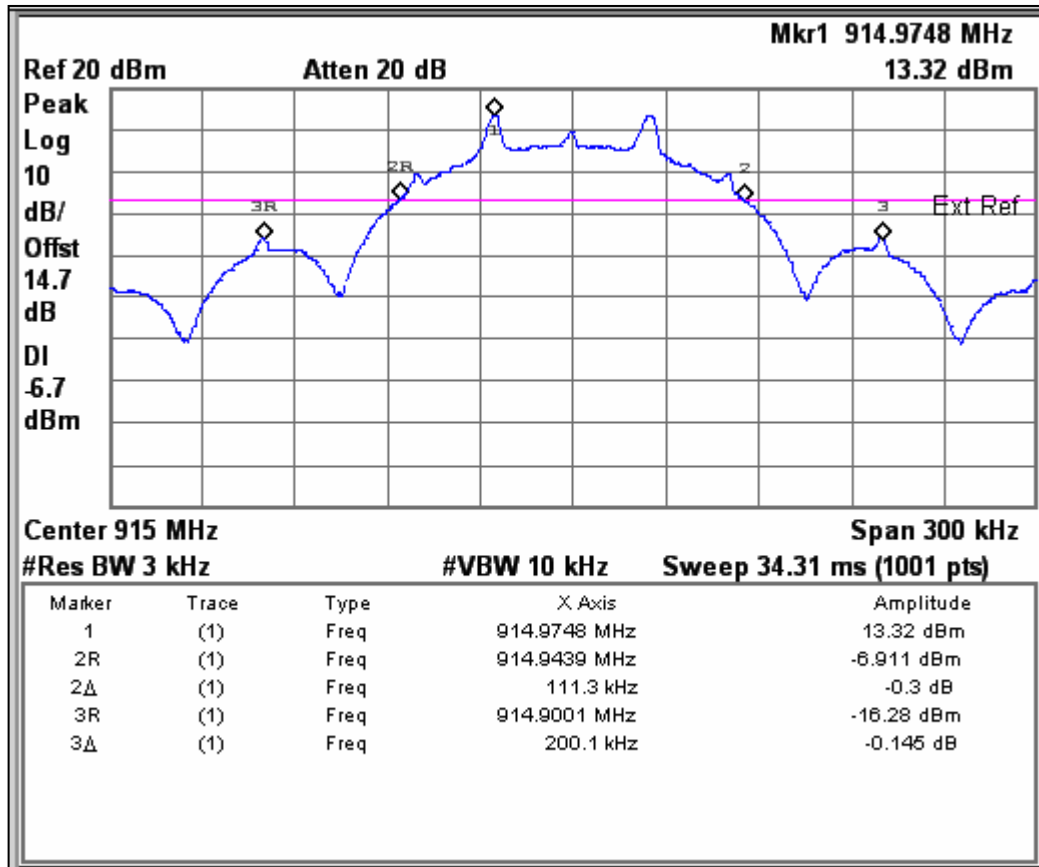


Figure 1: Measurement of Adjacent Channel Attenuation to FCC DA 00-705

Figure 1 illustrates that for FSK modulation, the adjacent channel attenuation at ± 100 kHz from the channel center frequency exceeds the 20 dB figure recommended.

ETSI Test Method

For systems implementing FHSS, ETSI EN 300 220-1 v2.3.1 defines adjacent channel attenuation (or power) in terms of modulation bandwidth limits. Whilst ETSI refers to absolute limits, the procedure could be considered as a method of determining the adjacent channel attenuation.

To summarize the procedure, the emissions at the sub-band edge (or adjacent channel) frequency are measured with a 1 kHz resolution bandwidth and 3 kHz video bandwidth. As outlined above, the test limit is -30 dBm, however a limit of 30 dB has been arbitrarily chosen (the display line is set to 30 dB below peak signal amplitude). A peak detector is used in conjunction with the max. hold function.

Note that the output power of the signal source is set to approximately 14 dBm or 25 mW, as permitted by ETSI for FHSS systems.

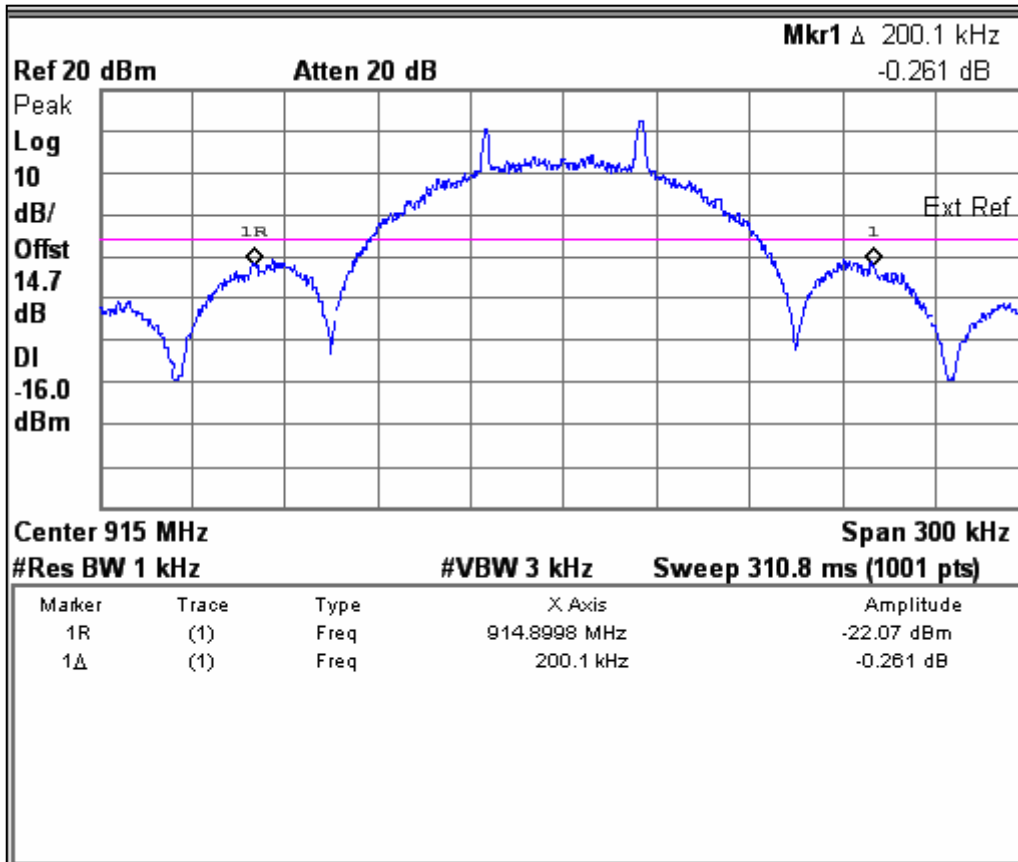


Figure 2: Measurement of Modulation Bandwidth to ETSI EN 300 220-1

Figure 2 indicates that a 30 dB measurement bandwidth limit could be met implementing this method.

Interpretation of Comment Resolutions #360 - #364

Comment resolutions #360 - #364 defines a method of measurement of adjacent channel attenuation similar to that defined by the FCC for licensed band operation:

Any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows: On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 100 kHz: 20dB. The measurement bandwidth shall be 3x the channel bandwidth, i.e. 600 kHz for the 200 kHz channel.

Comment resolution #300 defines the measurement bandwidth as 10 kHz.

For the purposes of this document, resolution and video bandwidths are set to 10 kHz. A peak detector is used in conjunction with the max. hold function.

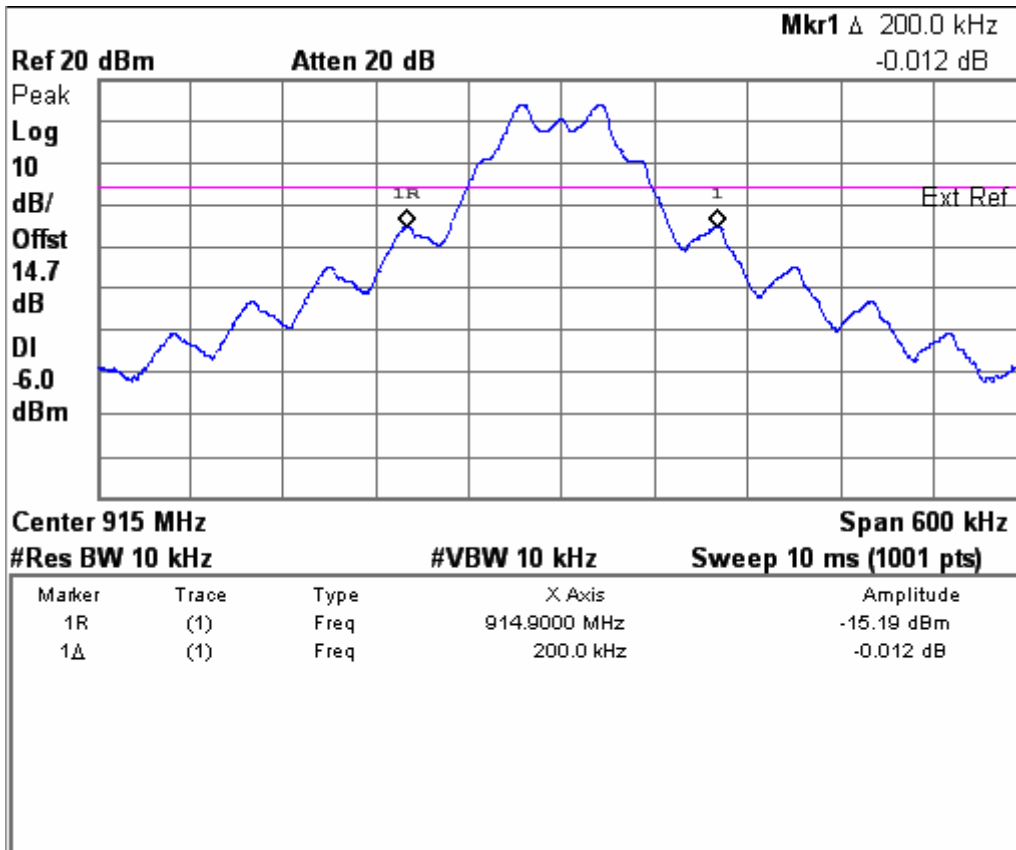


Figure 3: Interpretation of Comment Resolutions #360 - #364

The display line indicated by Figure 3 is the -20 dB attenuation limit describe above. At the channel edges the 20 dB limit can be met by 2-FSK modulation.

Conclusions

As stated, a vector signal generator has been used to generate the test signals. This yields a cleaner spectrum that can be expected from low-power ISM transceiver architectures. However, this document provides for an example of the adjacent channel attenuation figures that might be obtained should one of the three methods outlined above be adopted.

This document recommends the method outlined in FCC publication DA 00-705 since this is consistent with the description of both FCC 15.247 and RS-210