

**Project: IEEE P802.15 Working Group for Wireless Personal Area Networks (WPANs)**

**Submission Title:** [Resolution for the initial SB comment No.3]

**Date Submitted:** [18th January, 2011]

**Source:** [Sang-Kyu Lim, Ill Soon Jang, Dae Ho Kim, You Jin Kim, Kang Tae-Gyu] Company [ETRI]

Address: [138 Gajeongno, Yuseong-Gu, Daejeon, Korea]

Voice:[+82-42-860-1573], FAX: [+82-42-860-5218], E-Mail:[sklim@etri.re.kr]

**Re:** [Response to the initial SB for the IEEE 802.15.7 standard]

**Abstract:** [This document describes the resolution on the initial SB comment No.3]

**Purpose:** [To provide the resolution on the initial SB comment No.3]

**Notice:** This document has been prepared to assist the IEEE P802.15. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

**Release:** The contributor acknowledges and accepts that this contribution becomes the property of IEEE and may be made publicly available by P802.15.

# Resolution for the initial SB comment No.3

Sang-Kyu Lim  
sklim@etri.re.kr  
ETRI

# Comment No.3

Comment No.	Name	Page	Subclause	Line	Comment	Proposed Change
3 (line 54)	Rajagopal, Sridhar	16	4.4.3.2.1	10	4.4.3.2.1 refers to 8.5.3 which refers to 4.4.3.2	fix circular reference

- 4.4.3.2.1 Intra-frame flicker mitigation
  - Intra-frame flicker mitigation is accomplished by either the use of run length limiting coding, modulation scheme, or both. Specifically, these schemes are manchester encoding as specified in 10.5.2, 4B6B encoding as specified in 10.5.1, 8B10B encoding as specified in 11.3 or **VPPM as specified in 8.5.3.**
- Main issue
  - 8.5.3 does not specify the VPPM definition, either.
  - **No place for the VPPM specification in D4.**

# Benchmark source for resolution

## 12. PHY III specification

- 12.1 Reference modulator diagram
- 12.2 Scrambler
- 12.3 Channel encoder
- 12.4 CSK constellation overview
- 12.5 CSK constellation design rules
- 12.6 Data mapping for CSK**
- 12.7 Valid color band combinations
- 12.8 CSK color mapping
- 12.9 CSK calibration at the receiver

# Key points for resolution

## 10. PHY I specification

- 10.1 Reference modulator diagram
- 10.2 Outer forward error correction encoder
- 10.3 Interleaving and puncturing block
- 10.4 Inner forward error correction encoder
- 10.5 Run-length limiting encoder
- 10.6 Data mapping for VPPM**


## 11. PHY II specification

- 11.1 Reference modulator diagram
- 11.2 Forward error correction encoder
- 11.3 Run-length limiting encoder
- 11.4 Data mapping for VPPM**

# Resolution details - Figures

Logical value	Physical value	
0	High	$0 \leq t < 0.1 \times nT$
	Low	$0.1 \times nT \leq t < T$
1	Low	$0 \leq t < (1 - 0.1 \times n)T$
	High	$(1 - 0.1 \times n)T \leq t < T$

n is the required VPPM dimming level and integer ( $0 < n < 10$ )

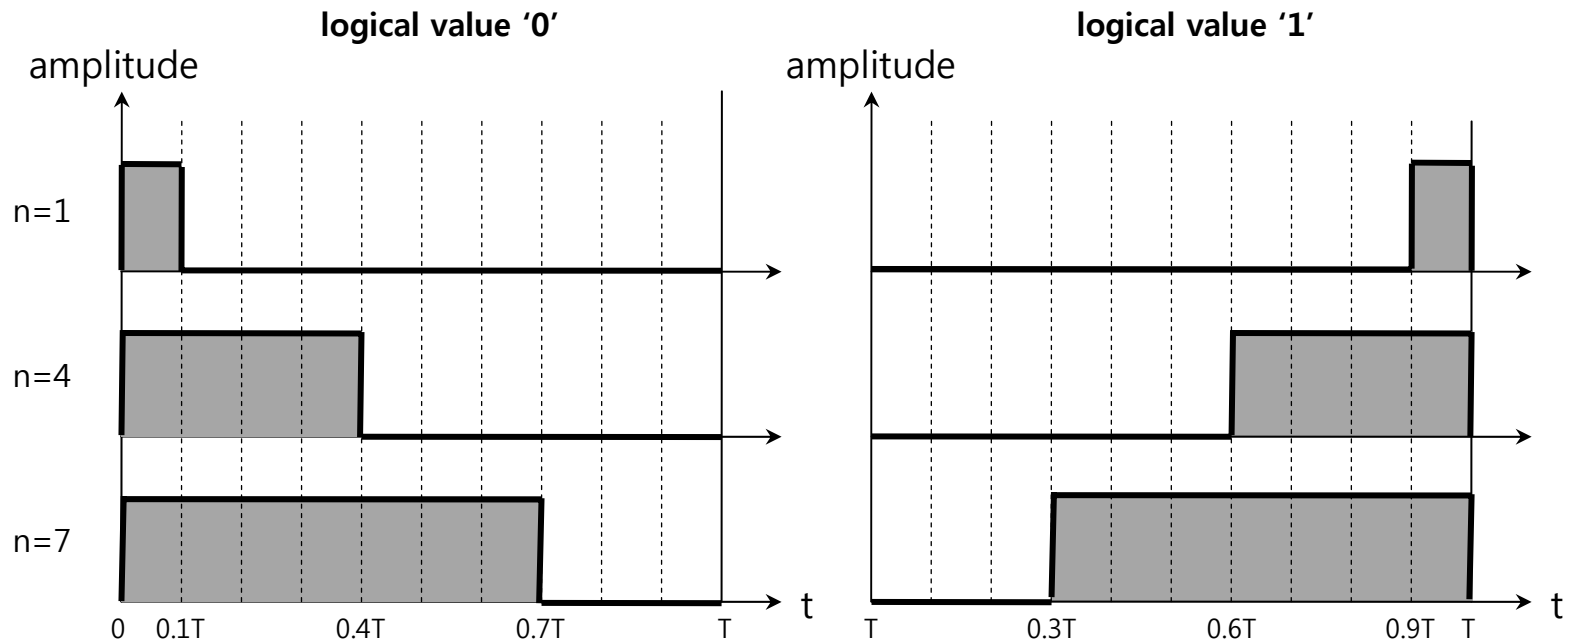

# Resolution details – Text for 10.6

- The data mapping for VPPM mode in **PHY I** is shown in Table xx and Figure xx. The data mapping for VPPM shall be defined as Table xx. The physical value mapped from the logical data “0” has a transition from ‘high’ to ‘low’ and the physical value mapped from the logical data “1” has a transition from ‘low’ to ‘high’ as shown in Table xx and Figure xx. ‘n’ in Table xx is the dimming level required only by VPPM and a integer **within the range of 1 to 9** so that VPPM modulated signals can support 10% dimming resolution only by VPPM. Figure xx shows the examples of the VPPM modulated waveform when the dimming levels, n, are 1, 4, and 7, respectively.
- Table caption : Table xx – Definition of data mapping for VPPM mode in **PHY I**
- Figure caption : Figure xx - Examples of the VPPM modulated waveforms in **PHY I** representing logical data ‘0’ and ‘1’

# Resolution details – Text for 11.4

- All PHY II VPPM modes shall use data mapping as defined in 10.6.