

**Project: IEEE P802.15 Working Group for Wireless Personal Area Networks(WPANs)**

**Submission Title:** ETRI FSK PHY Proposal for TG4m

**Date Submitted:** July 2012

**Source:** Mi-Kyung Oh, Cheol-ho Shin, and Sangsung Choi (ETRI), Soo-Young Chang (SYCA)

**Contact:** [ohmik@etri.re.kr](mailto:ohmik@etri.re.kr)

**Voice:** +82 42 860 6831, E-Mail: ohmik@etri.re.kr

**Re:** Call for proposals

**Abstract:** This contribution presents a final proposal for the TG4m

**Purpose:** Final proposal to 802.15m

**Notice:** This document has been prepared to assist the IEEE P802.15. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

**Release:** The contributor acknowledges and accepts that this contribution becomes the property of IEEE and may be made publicly available by P802.15.

# Contents

- Requirements overview
- Dual PHY for TVWS WPAN
- TVWS WPAN PHY Considerations
- Narrowband FSK PHY
- Location capability for FSK PHY
- Summary

# Requirements Overview

- Key requirements for TVWS WPAN (Doc. 11-684-11)
  - Operations in TVWS frequency bands under regulatory constraints
  - Data rate of typically 40Kbps to 2Mbps & optionally 10Mbps
  - Optimal & power efficient device command & control applications
  - Operating range of at least 1Km
  - At least 1000 direct neighboring devices
  - Multi-band capability
  - Coexistence with primary users (TV broadcasting)

# Dual PHY for TVWS WPAN

- Wide range of PHY data rate
  - Typically 40Kbps~2Mbps, optionally ~10Mbps
- Various applications in TGD(doc.11-0684-11)
  - Single PHY may not cover all the applications
  - FSK PHY: Low data rate & low complexity PHY
  - OFDM PHY: High data rate & high reliability PHY

| Application                                | Candidate PHY |
|--|---------------|
| Smart Utility Networks                     | FSK           |
| Infrastructure Monitoring Networks         | FSK           |
| Intelligent Transportation System          | OFDM          |
| Surveillance Control & Monitoring Networks | OFDM          |

# TVWS WPAN PHY Considerations (1)

- Main considerations for TVWS WPAN PHY proposal
  - Reliability
  - Compatibility

# TVWS WPAN PHY Considerations (2)

- Reliability
  - Rural areas
    - Easy to find available TVWS channels
    - Usually not crowded: free from interference
    - Max. 100mW TX power for Mode I/II devices
    - 1km service coverage is easily met
  - Metropolitan areas
    - Difficult to find TVWS channels
    - Reduced TX power (Max. 40mW) for Mode I/II devices (operation in adjacent channel)
    - Usually crowded: several services in one TVWS channel
    - Reliability enhancing features are optionally required

# TVWS WPAN PHY Considerations (3)


- Compatibility
  - TVWS channel availability is not guaranteed, especially in metropolitan areas
  - Seamless WPAN services should be maintained regardless of TVWS channel status
  - Transition to other legacy bands may be required
    - e.g., SUN standard is well established in 900MHz band
  - There should be at least one operation mode to provide connectivity between TVWS WPAN and SUN

# Narrowband FSK PHY



# Motivation for NB FSK PHY

- Benefits
  - No need of high-linearity power amplifier (PA)
  - Non-coherent receiver: low-power consumption
    - No need to track the phase of the carrier
    - Performance difference between coherent receiver and non-coherent receiver: roughly 1dB
    - Suitable for battery-powered Mode I devices
  - Simple, cheap and proven technology
    - SUN & LECIM standards take FSK PHY

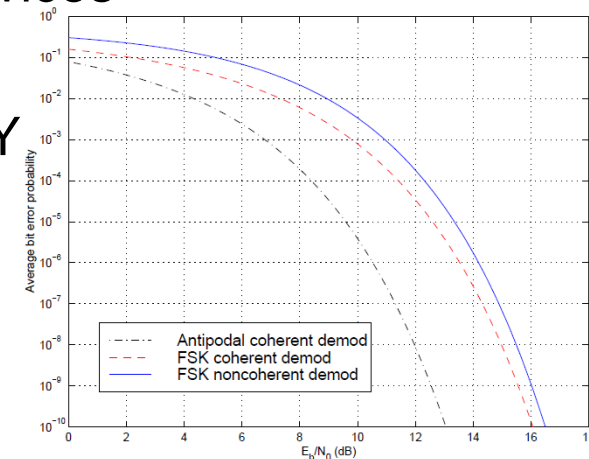

\* Wong & Lok: *Theory of Digital Communications*, Chapter 2. Modulation & Demodulation, p221

# FSK PHY for TVWS WPAN (1)

- Propose to adopt mandatory SUN FSK PHY
  - Data rate: 50Kbps
  - Channel BW: 200KHz
  - Modulation: 2 Filtered FSK
  - Whitening: off
  - FEC & Interleaving: off
- Proposed FSK PHY mandatory mode
  - Provide compatibility between SUN and TVWS WPAN
  - Operate well in good channel condition, such as rural areas.

# FSK PHY for TVWS WPAN (2)

- Link Budget for mandatory FSK mode
  - Path loss: Modified Hata model is considered (Doc.11-684-11)
  - Reliability enhancing features are required


| Link Budget for TG4m TVWS WPAN FSK PHY 50Kbps         |      |            |
|---|------|------------|
| Parameters  | Unit | Value      |
| 1) Bandwidth [BW]                                     | MHz  | 0.2        |
| 2) Average TX Power [Pt] (PSD limit: 2.6dBm/100KHz)   | dBm  | 5.6        |
| 3) TX antenna gain [Gt]                               | dBi  | 0.0        |
| 4) Center frequency [fc]                              | Hz   | 6.9500E+08 |
| 5) Path loss at 1km [PL] (From modified Hata model)   | dB   | 112.0      |
| 6) RX antenna gain [Gr]                               | dBi  | 0.0        |
| 7) RX power [Pr=Pt+Gt+Gr-PL]                          | dBm  | -106.4     |
| 8) Receiver AWGN noise floor [N=-174+10log(BW)]       | dBm  | -121.0     |
| 9) RF noise figure [Nf]                               | dB   | 10.0       |
| 10) Average noise power [Pn=N+Nf]                     | dBm  | -111.0     |
| 11) Minimum Eb/No [S] (13dB@10 <sup>-5</sup> for FSK) | dB   | 13.0       |
| 12) Implementation loss [I]                           | dB   | 3.0        |
| 13) Link Margin [LM=Pr-Pn-S-I]                        | dB   | -11.4      |

# FSK PHY for TVWS WPAN (3)

- Propose to include reliability enhancing features
  - Parity bit in PHY header (mandatory)
  - Whitening (optional)
  - FEC & Interleaving (optional)
  - Spreading (optional)
  - Longer SFD sequence (optional)

# FSK PHY for TVWS WPAN (4)

- Overall FSK PHY transmitter block diagram

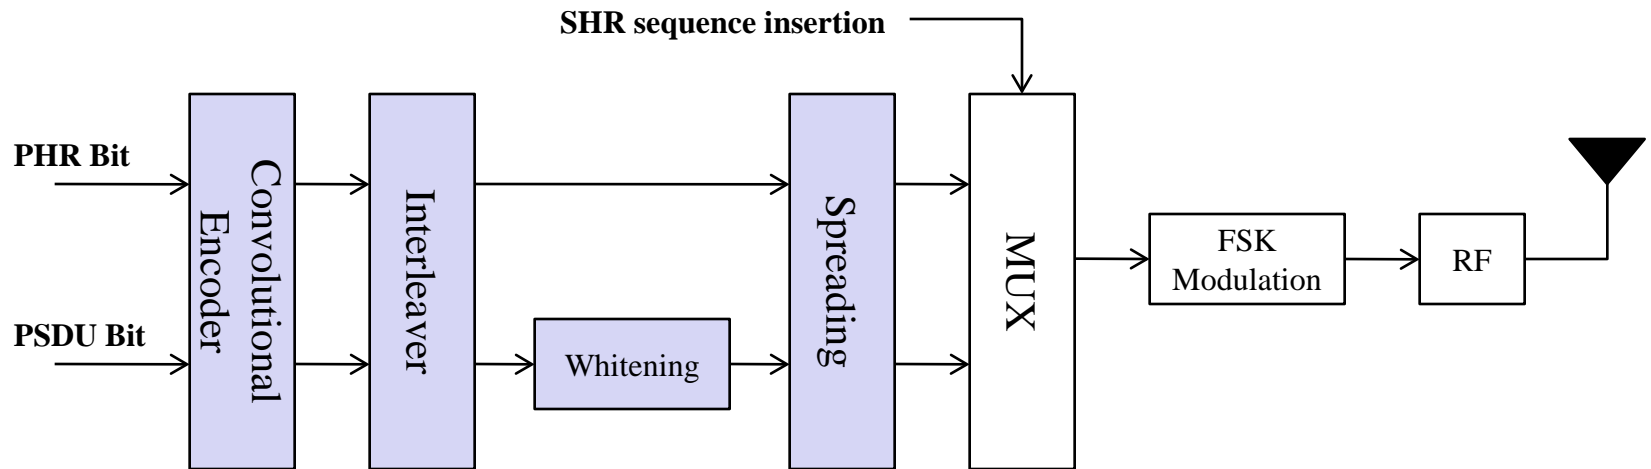


# FSK PHY for TVWS WPAN (5)

- Modulation & channel parameters
  - Mode #1: mandatory 50Kbps (same as TG4g)
  - Mode #2: 100Kbps
    - 100Kbps is more attractive than 150Kbps when considering implementation
  - Mode #3: 200Kbps (same as TG4g)


|                       | Operating Mode #1 | Operating Mode #2 | Operating Mode #3 |
|-----------------------|-------------------|-------------------|-------------------|
| Data rate (Kb/s)      | 50                | 100               | 200               |
| Modulation            | Filtered 2FSK     | Filtered 2FSK     | Filtered 2FSK     |
| Modulation Index      | 1                 | 0.5               | 0.5               |
| Channel Spacing (KHz) | 200               | 400               | 400               |

# FSK PHY for TVWS WPAN (6)

- Channel Plan for 6MHz bandwidth
  - 50Kbps mode (200KHz BW): 28 channels

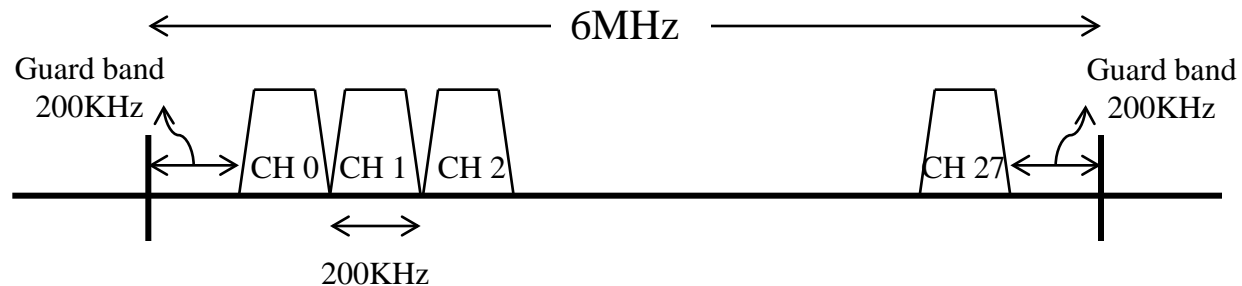


- 100Kbps & 200Kbps mode (400KHz BW): 14 channels

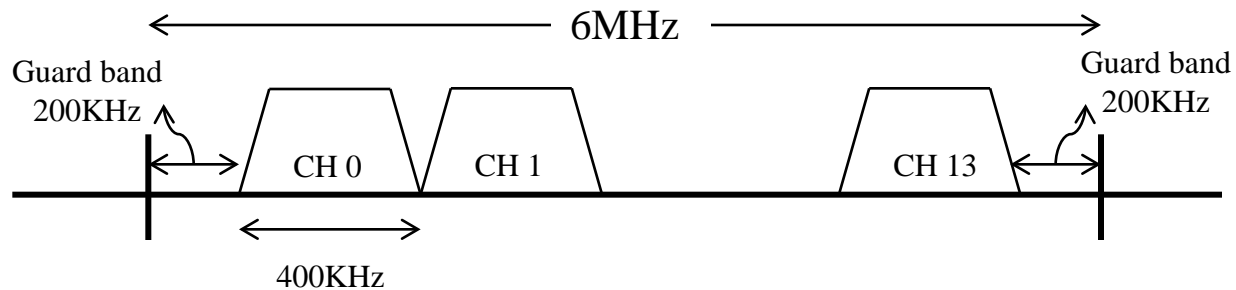

# FSK PHY for TVWS WPAN (7)

- FSK PHY packet format

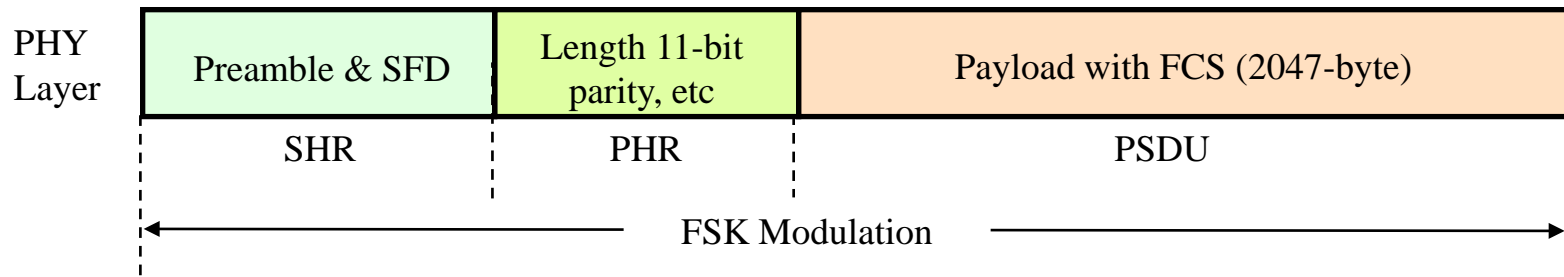

- Preamble

- multiples of “01010101” as specified in SUN FSK PHY
- Length: 4-100 octet

- SFD

- Basically, same as SUN FSK PHY
- Optionally, suggest to consider a longer SFD sequence to reduce false alarm rate (doc. 12-0048-00 & 12-0094-00)



# FSK PHY for TVWS WPAN (8)

- PHY header (PHR)
  - Bit string index [3:15]: same as SUN FSK
    - Frame length: 11bit → max. 2047-octet PSDU
  - Bit string index [2]: Ranging packet indication for ranging counter
  - Bit string index [1]: Parity bit
    - Simply detect PHR error to stop demodulation process
  - Bit string index [0]: Reserved bit → set to “0”
    - Consider compatibility between TVWS WPAN & SUN

| Bit string index | 0        | 1      | 2              | 3        | 4              | 5-15                            |
|------------------|----------|--------|----------------|----------|----------------|---------------------------------|
| Bit mapping      | 0        | Parity | RNG            | FCS      | DW             | L <sub>10</sub> -L <sub>0</sub> |
| Field name       | Reserved | Parity | Ranging packet | FCS type | Data whitening | Frame Length                    |

# FSK PHY for TVWS WPAN (9)

- FEC & Interleaving
  - Propose to use the same FEC & Interleaving in LECIM FSK PHY (as in doc.12-089-06)
- Spreading
  - Propose to use the same spreading scheme in LECIM FSK PHY (as in doc.12-089-06)

# FSK PHY for TVWS WPAN (10)

- The parameters configuring the use of FEC & interleaving and spreading are listed in PHY PIB attributes
  - phyTVWSFSKFECEnabled: on/off
  - phyTVWSFSKInterleavingEnabled: on/off
  - phyTVWSFSKSpreadingEnabled: on/off
  - phyTVWSFSKSpreadingFactor: 2-bit (0,1,2,4)
  - phyTVWSFSKSFDLength: 0 (2-byte SFD), 1 (longer SFD)



# Location Capability for FSK PHY

# RF Localization for TG4m

- Initially, Doc.12-167-00 (RF localization in TVWS) started to discuss about RF localization issue
- Motivation
  - Mode II device must have location capability with accuracy of  $\pm 50\text{m}$  and Mode I device may require location capability
  - GPS is not 100% available such as indoors, urban canyons and GPS jamming/spoofing attack environments
  - Battery-powered Mode I devices may not equip with GPS receiver
- Suggest to use optional RF localization for TG4m

# RF Localization

- Positioning
  - At least 3 references with known positions are required to retrieve a 2D-Position from 3 ranging (distance) measurements
- Ranging methods
  - TWR (Two Way Ranging) is desirable for accuracy

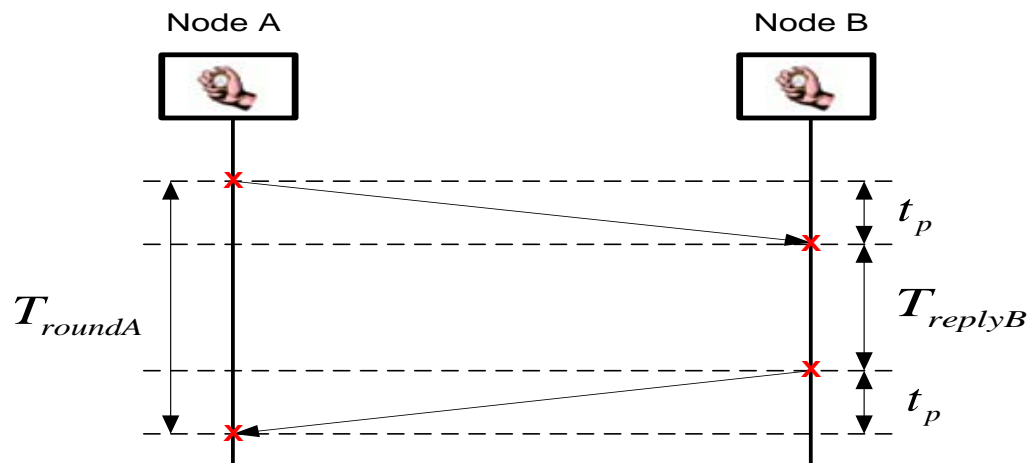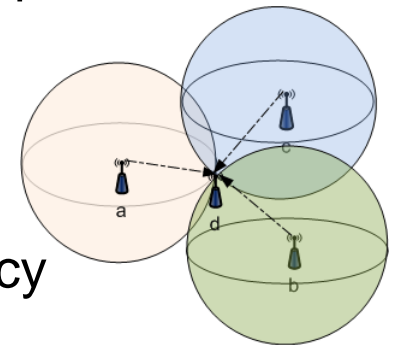


Time of Flight (ToF) :

$$t_p = \frac{T_{roundA} - T_{replyB}}{2}$$

Distance  $d = \text{ToF} \times \text{speed of light}$


# Ranging Mechanism in 15.4a IR-UWB (1)

- ToF estimation based on Two Way Ranging (TWR)
  - Ranging counters in Node A & Node B
    - Timestamps for precise instant at which RMARKER are transmitted and received
    - Valid timestamp for received RMARKER is used only when “ranging indication bit” in PHR is “1”

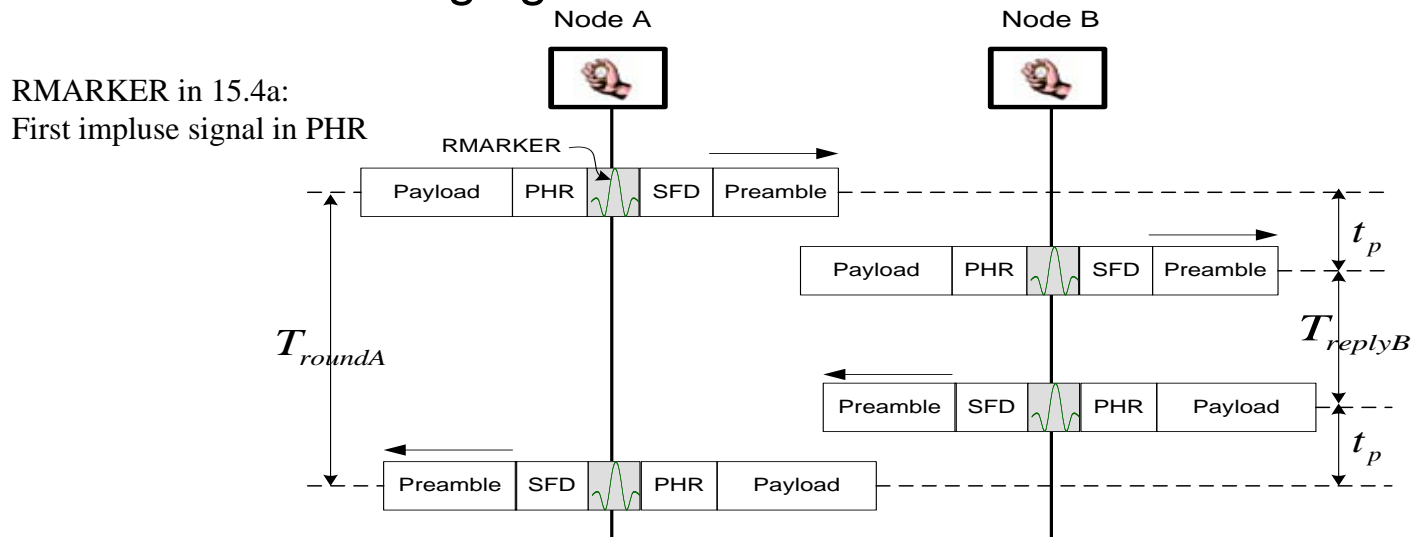

# Ranging Mechanism in 15.4a IR-UWB (2)

- When is the precise instant for received RMARKER?
  - It depends on Time of Arrival (ToA) estimation at the receiver
  - ToA estimation error occurs at both receiver sides in TWR
    - 1 nsec error leads to -30cm ~ +30cm ranging accuracy

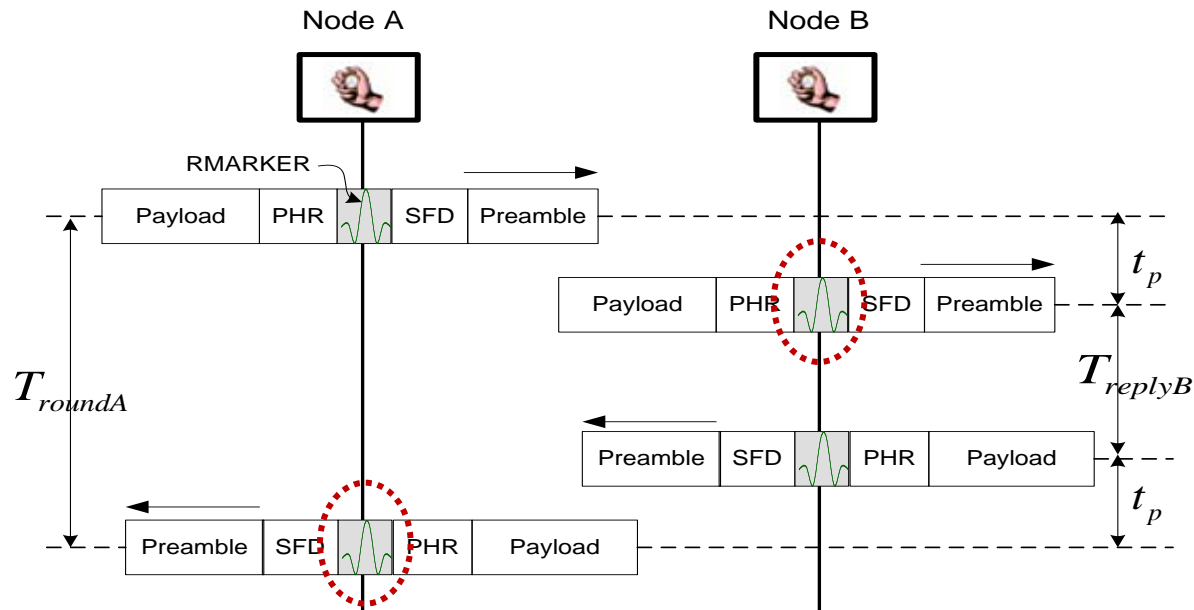



# Ranging Supporting PHY


- Ranging supporting PHY should provide the following features
    - Ranging counter
    - RMARKER
    - Ranging indication bit in PHR
    - Sequence for Time of Arrival (ToA) estimation
- PHY independent
- PHY dependent
- Sequence for ToA estimation should be designed based on PHY characteristics and desired ranging accuracy

# Ranging in FSK PHY (1)

- Ranging for TG4m can be performed in OFDM PHY
  - Wider bandwidth & STF (good for ToA estimation)
- FSK PHY may also require location capability even though its accuracy is generally worse than OFDM PHY
- How can we obtain ToA information in FSK PHY?
  - It is difficult to retrieve ToA from correlation based methods which are commonly used in UWB or OFDM
  - It is desirable to extract FSK symbol transition timing


## Ranging in FSK PHY (2)

- Ranging sequence
  - Select best sequence for retrieving symbol transition timing
  - Repetition of “01” pattern would be good

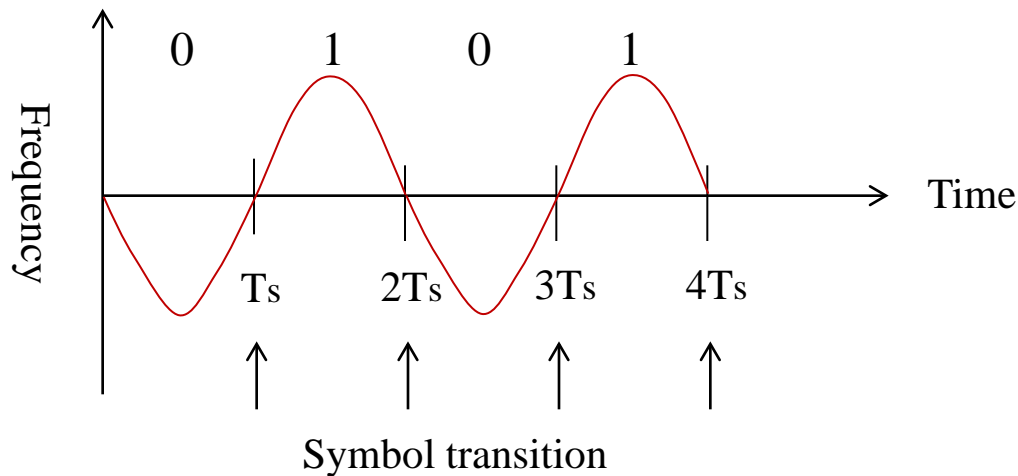

# Ranging in FSK PHY (3)

- Ranging sequence insertion
  - If RNG bit in PHR is “1”, insert ranging sequence right after PHR
- RMARKER
  - Last PHR symbol transition

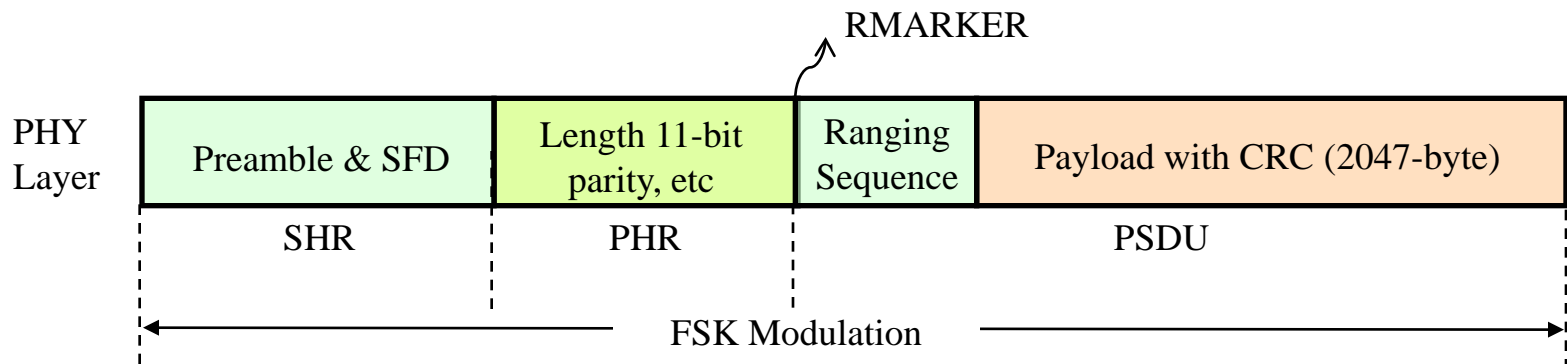


# Symbol Transition Estimation (1)

- Simulation environments
  - Data rate: FSK 200Kbps
  - Ranging sequence: 8 repetition of “01”
  - Operation clock used in FSK demodulator: 16 x 200KHz
  - FSK demodulator type
    - Quadricorrelator (QC) based frequency discriminator
  - Symbol transition estimation
    - Finding zero phase at QC output
  - AWGN & no clock drift environment

# Symbol Transition Estimation (2)

- Symbol transition estimation error
  - 0.1 sample unit (31.25 nsec) @ 16dB
  - Ranging error: -10m ~ 10m

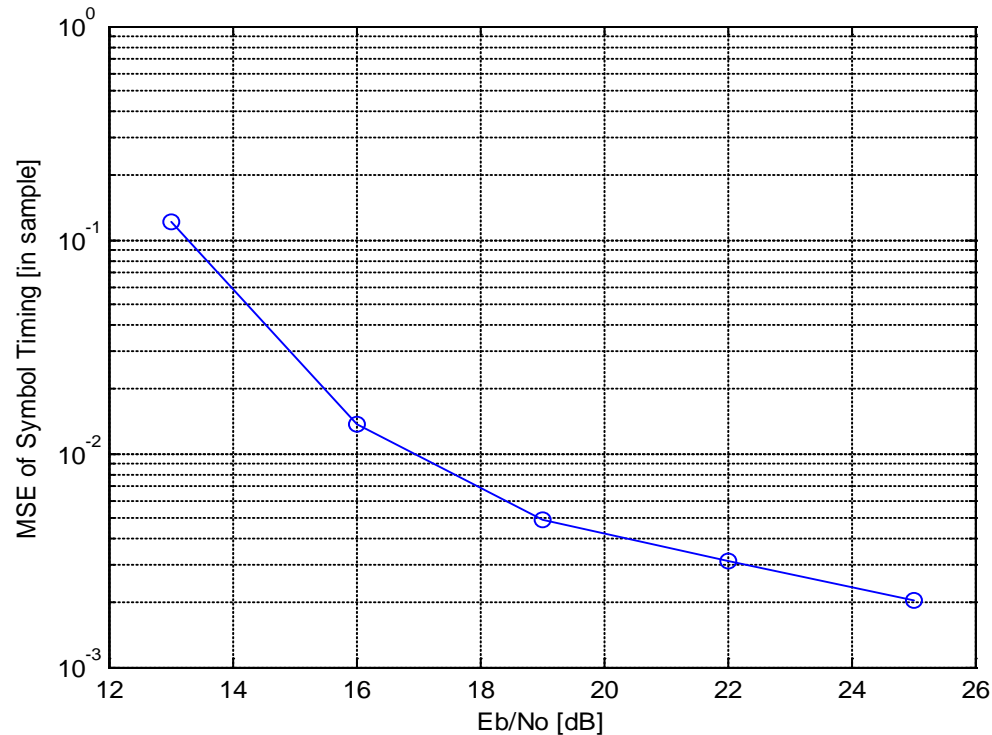

# TG4m Ranging Considerations

- Ranging mechanism
  - Suggest to use well-established 15.4a ranging mechanism
- Performance (ranging accuracy) degradation factors
  - ToA estimation error
  - Clock drift due to finite crystal tolerance causes error in ToF calculation

$$\hat{t}_p - t_p \approx \frac{1}{2} \times t_{replyB} \times (e_A - e_B)$$

- SDS-TWR in 15.4a may resolve this problem, but network traffic will increase due to increased message exchange
- Additionally, enhanced ranging protocol may be required

# Summary

- FSK PHY for TG4m TVWS WPAN
  - Adopt basically SUN FSK PHY for compatibility
  - Include reliability enhancing features
    - Parity in PHR, Whitening, FEC & Interleaver, Spreading
  
- Location capability for FSK PHY (Optional)
  - Adopt basically 15.4a ranging mechanism
  - Ranging indication bit in PHR
  - RMARKER for ranging counter operation
    - Last PHR symbol transition
  - Insert ranging sequence for FSK symbol transition estimation