

Project: IEEE P802.15 Working Group for Wireless Personal Area Networks (WPANs)

Submission Title: [NICT Impulse Radio Ultra Wideband PHY proposal to IEEE 802.15.8]

Date Submitted: [July 2013]

Source: [Igor Dotlic, Huan-Bang Li, Marco Hernandez, Ryu Miura] Company [NICT]

Address [3-4 Hikarino-oka, Yokosuka, Kanagawa, Japan]

Voice:[+81-468475066], FAX: [:+81 468475431], E-Mail:[dotlic@nict.go.jp]

Re: [TG8 Call for Proposals (CFP) (DCN:13-0069-05-0008)]

Abstract: [This is the presentation of the NICT Impulse Radio Ultra-Wideband PHY proposal to IEEE 802.15.8.]

Purpose: [To provide details of the NICT IR-UWB PHY proposal]

Notice: This document has been prepared to assist the IEEE P802.15. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release: The contributor acknowledges and accepts that this contribution becomes the property of IEEE and may be made publicly available by P802.15.

NICT Impulse Radio Ultra Wideband PHY Proposal to IEEE 802.15.8

Igor Dotlic
Huan-Bang Li
Marco Hernandez
Ryu Miura

National Institute of Information and
Communications Technology (NICT), Japan

Motivation


Advantages:

- UWB band is regulated worldwide.
- Power consumption of IR-UWB devices is low.
- Due to large bandwidth precise localization is possible.

Downside:

- Low regulated Power Spectral Density (PSD) levels of -41.3 dBm/MHz allow low Tx power levels.

UWB Regulations Worldwide

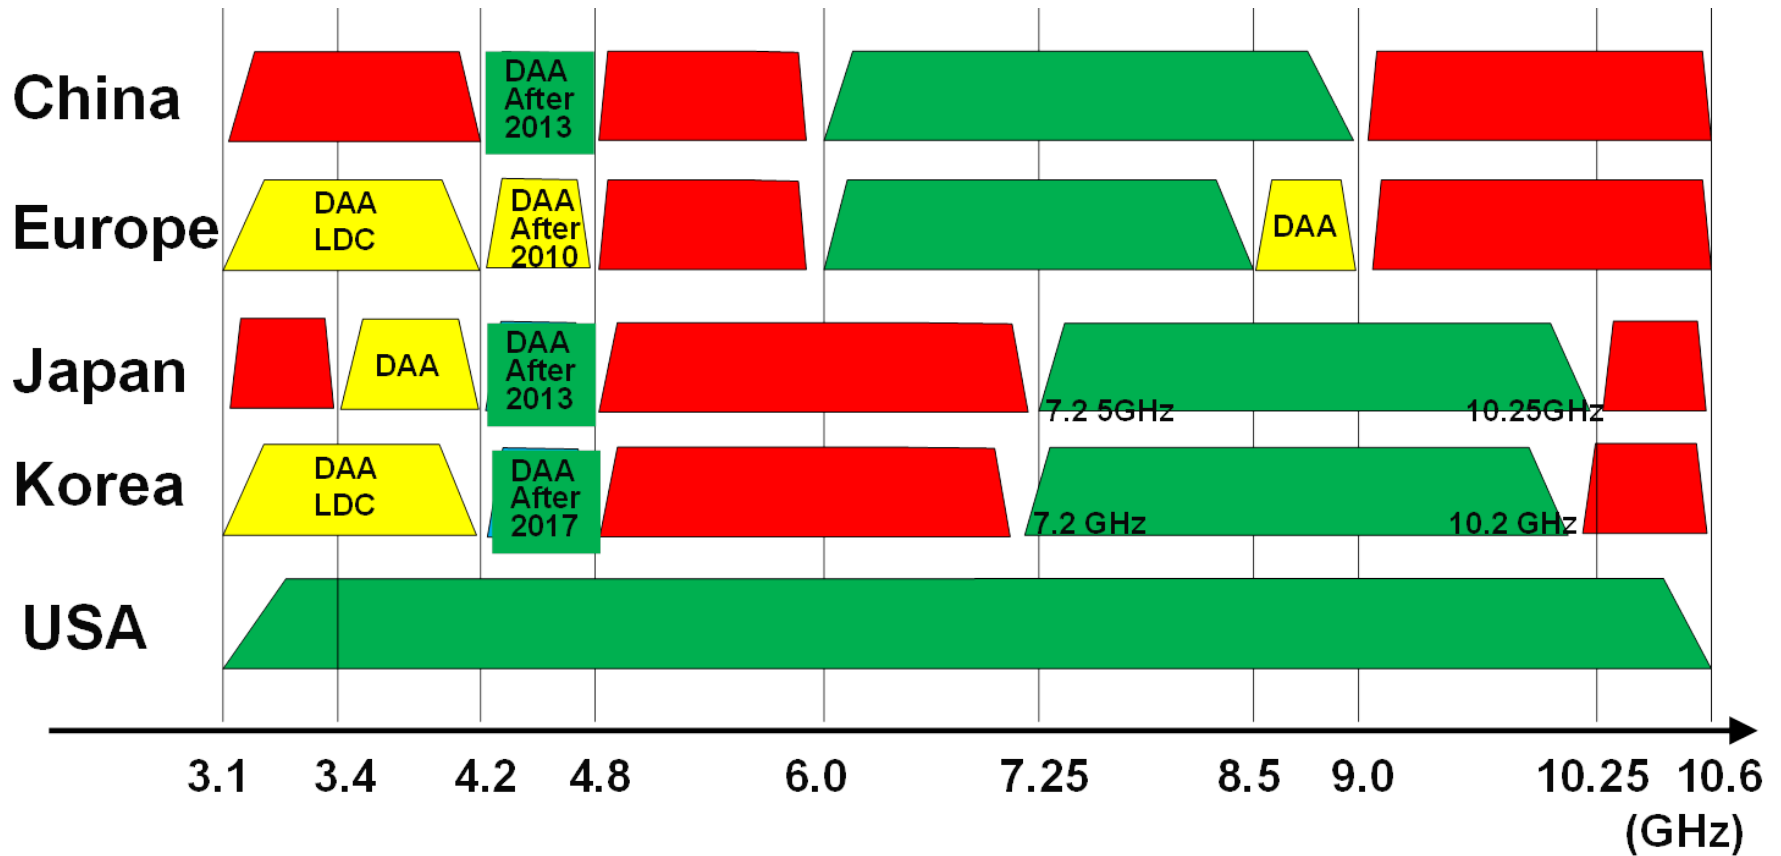

Channelization

- Maximum allowed PSD level is low.
 - The main limitation of the system is low Tx power.
- We are proposing a single channel in upper UWB band for the system to maximize allowed Tx power level.
- Channel location and bandwidth are determined by regulation at a given Geo.

Pulse shape and duration

- We do not define a specific pulse shape.
 - Allow different low-complexity pulse generators.
 - Pulse bands will be different at different Geos.
- Pulse shape is constrained
 - In spectrum by the local regulations.
 - In duration by the Duty Cycle (DC) of no more than $DC=1/32=3.1\%$.

Packet structure




SHR – Synchronization Header

PHR – PHY Header


PPDU – Physical Layer Protocol Data
Unit

SHR Structure

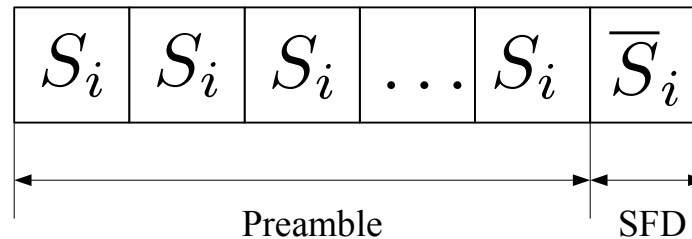


- Preamble consists of $M=8$ times repetition of the sequence S_i .
- S_i is one of the Gold sequences of length 31.
 - Relatively short length with good circular autocorrelation properties.
- Sync. Frame Delimiter (SFD) represents inversion of S_i used in the preamble.

Symbol structure

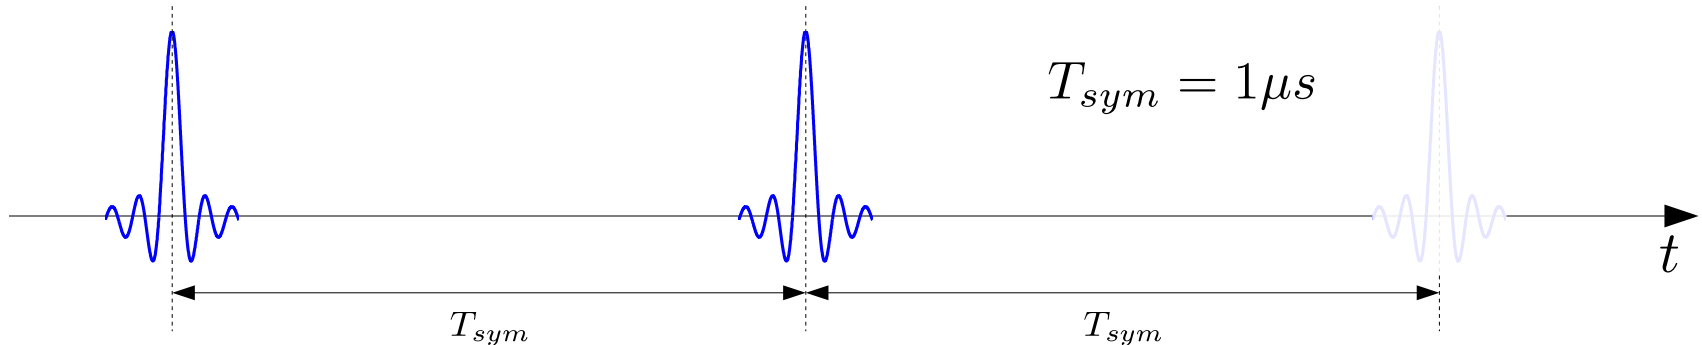

- On-Off Keying (OOK) modulation is used.
- The same symbol structure will be used in all parts of the packet (SHR, PHR, PSDU).
- There is no time hopping.

Channel coding and data rates

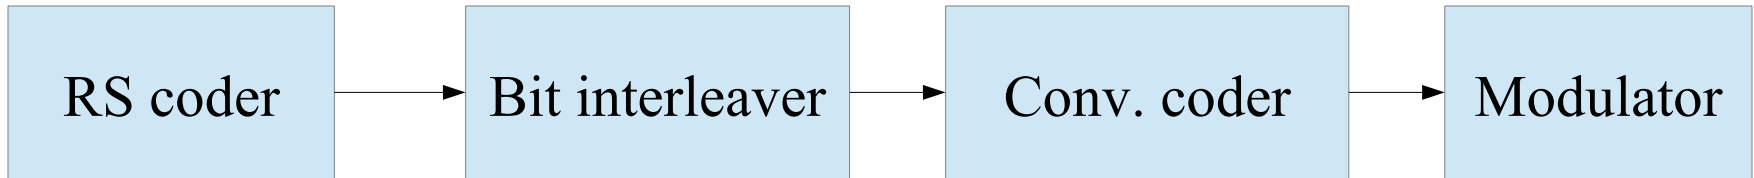

- Coding is concatenation of outer Reed-Solomon $RS_6(63,55)$ codes and inner convolutional codes.
- Different data rates have different convolutional coding rates and different number of chips per symbol.

Data rate (Kbps)	54.56	109.12	218.25	436.51	873.02
Conv. Coding rate	1/4	1/4	1/4	1/2	1/1
Chips per symbol	4	2	1	1	1


Simulation results.

Basic simulation parameters

- Carrier frequency: 8 GHz.
- Pulse Bandwidth: 1.25 GHz.
- Chirp pulse of duration 32 ns.
- 1-256 bytes packets.
- 5000 packets per simulation point
 - 50 scenarios.
 - 100 packets transferred per scenario.
- IEEE 802.15.4a-2007 CM1 Channel Model

Simulation results (cont'd).

Coherent receiver architecture.

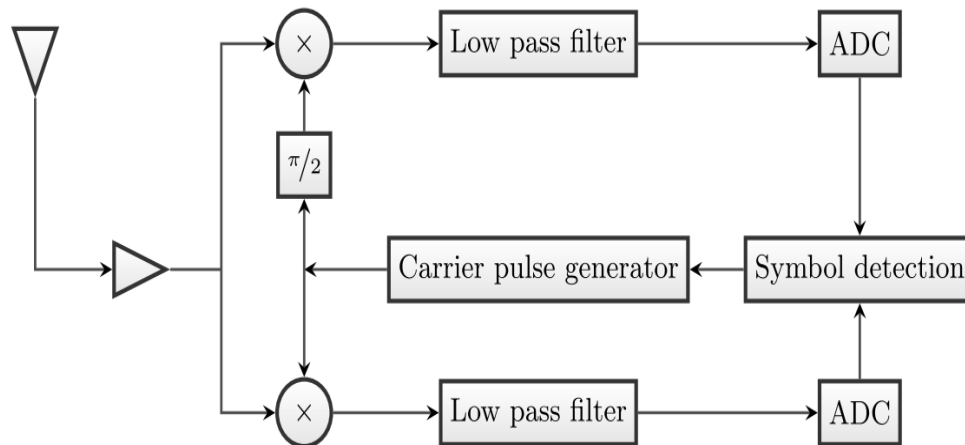


Sampling receiver


Nyquist sampling rate of
1.25 GHz.

Period of sampling: 60 ns
per symbol.


Multipath fading with reception window of 60ns.

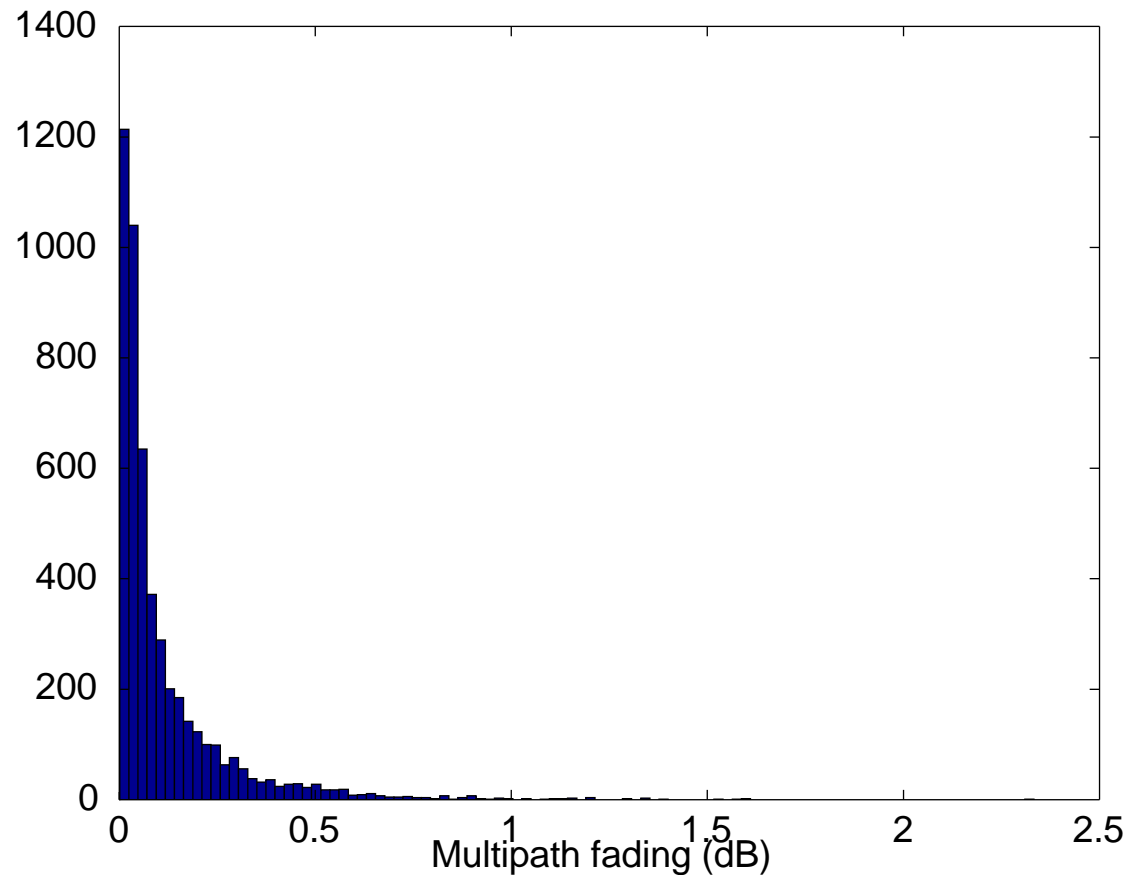


Performance in noise @ 218 Kbps

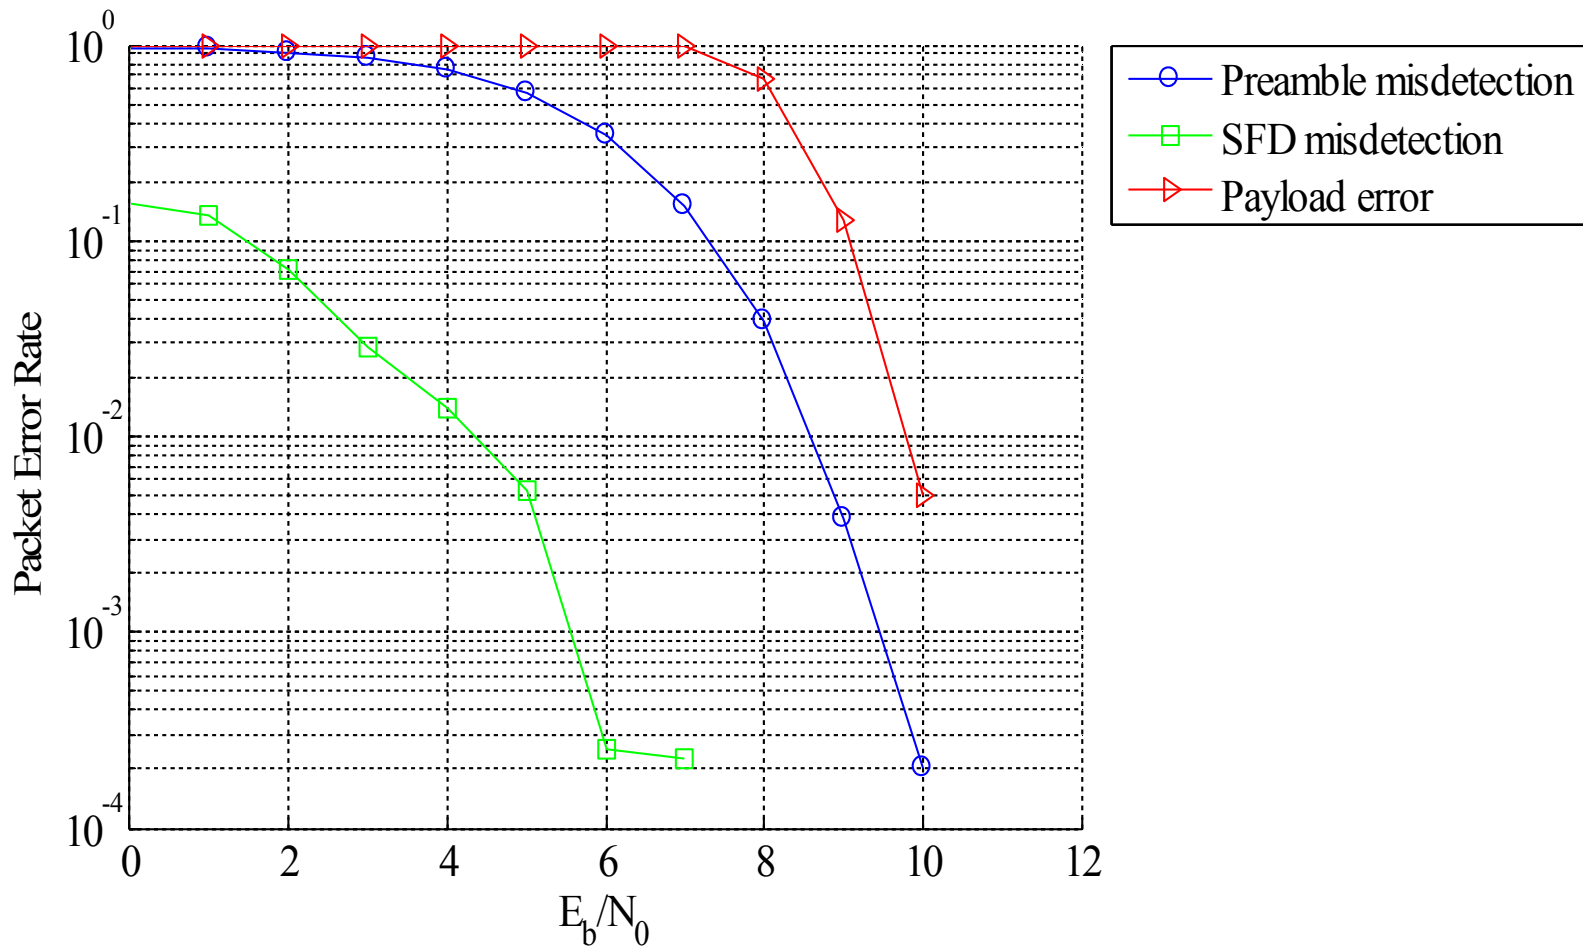


Simulated MAI traffic @ 218 Kbps

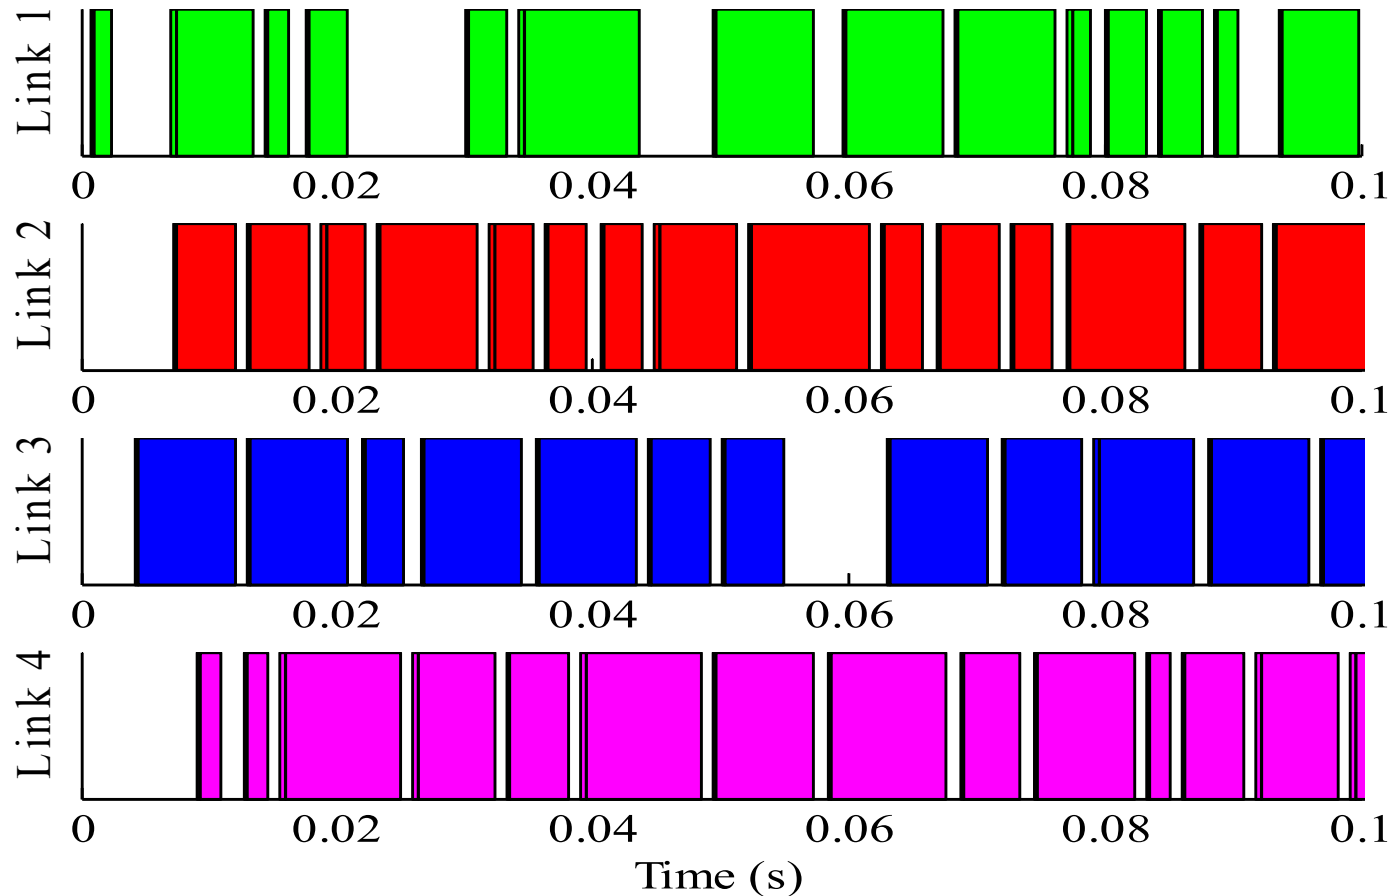


Performance in Multiple Access Interference @ 218 Kbps

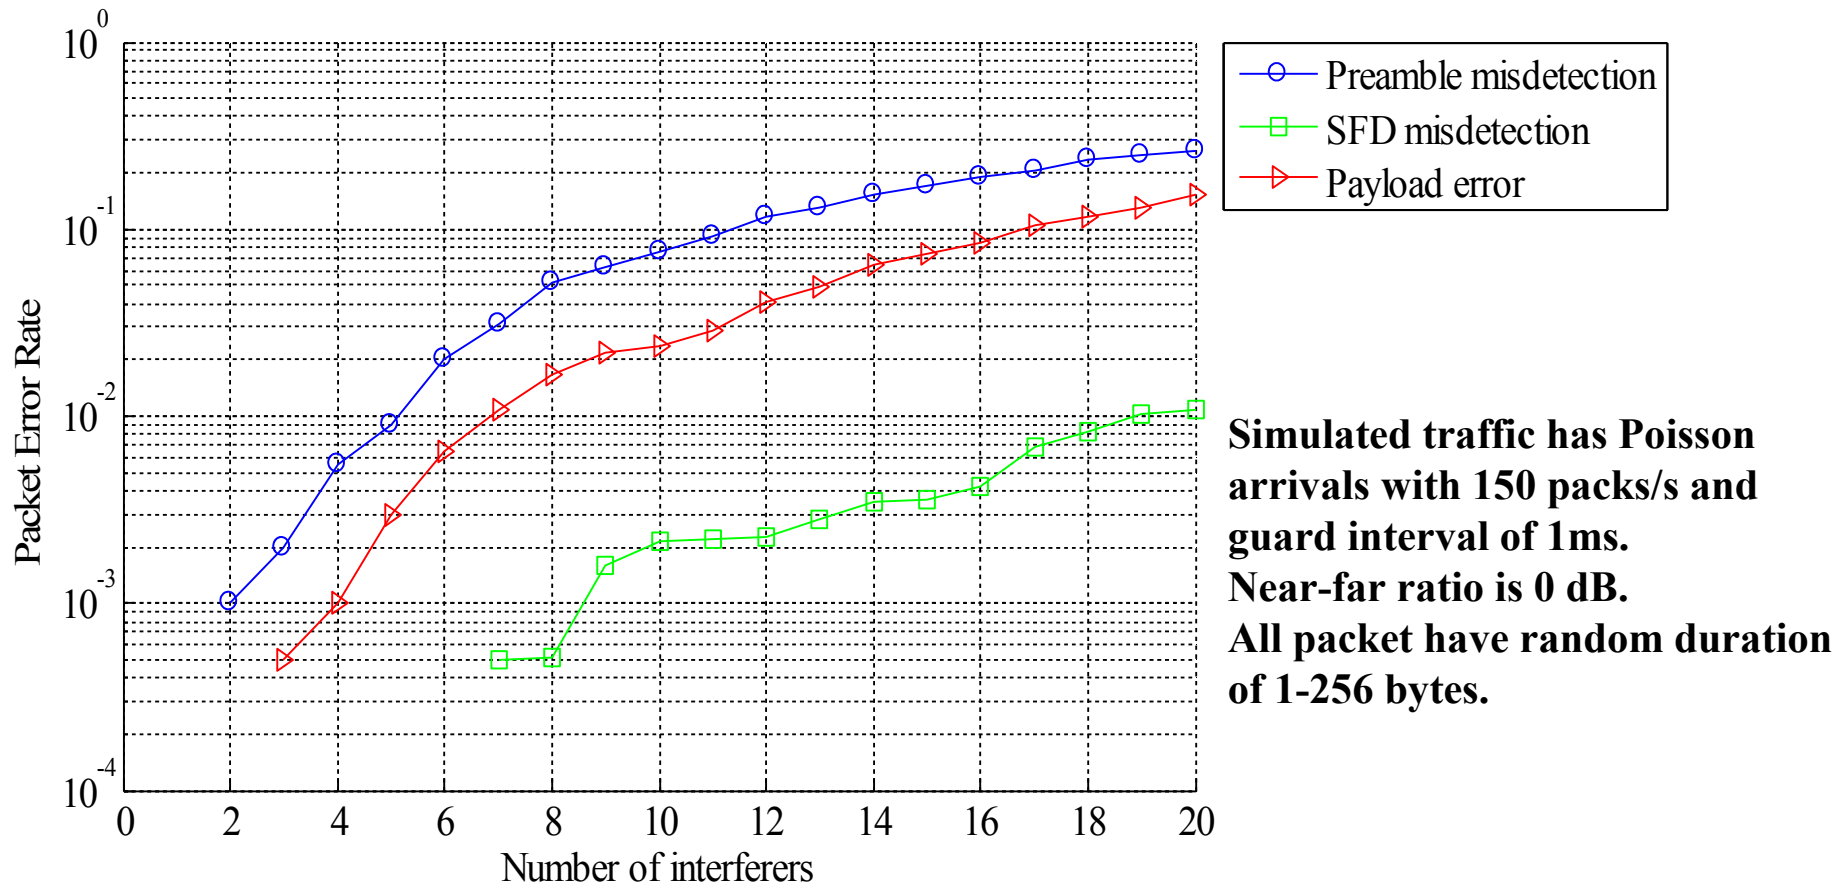


Performance in noise @ 436 Kbps

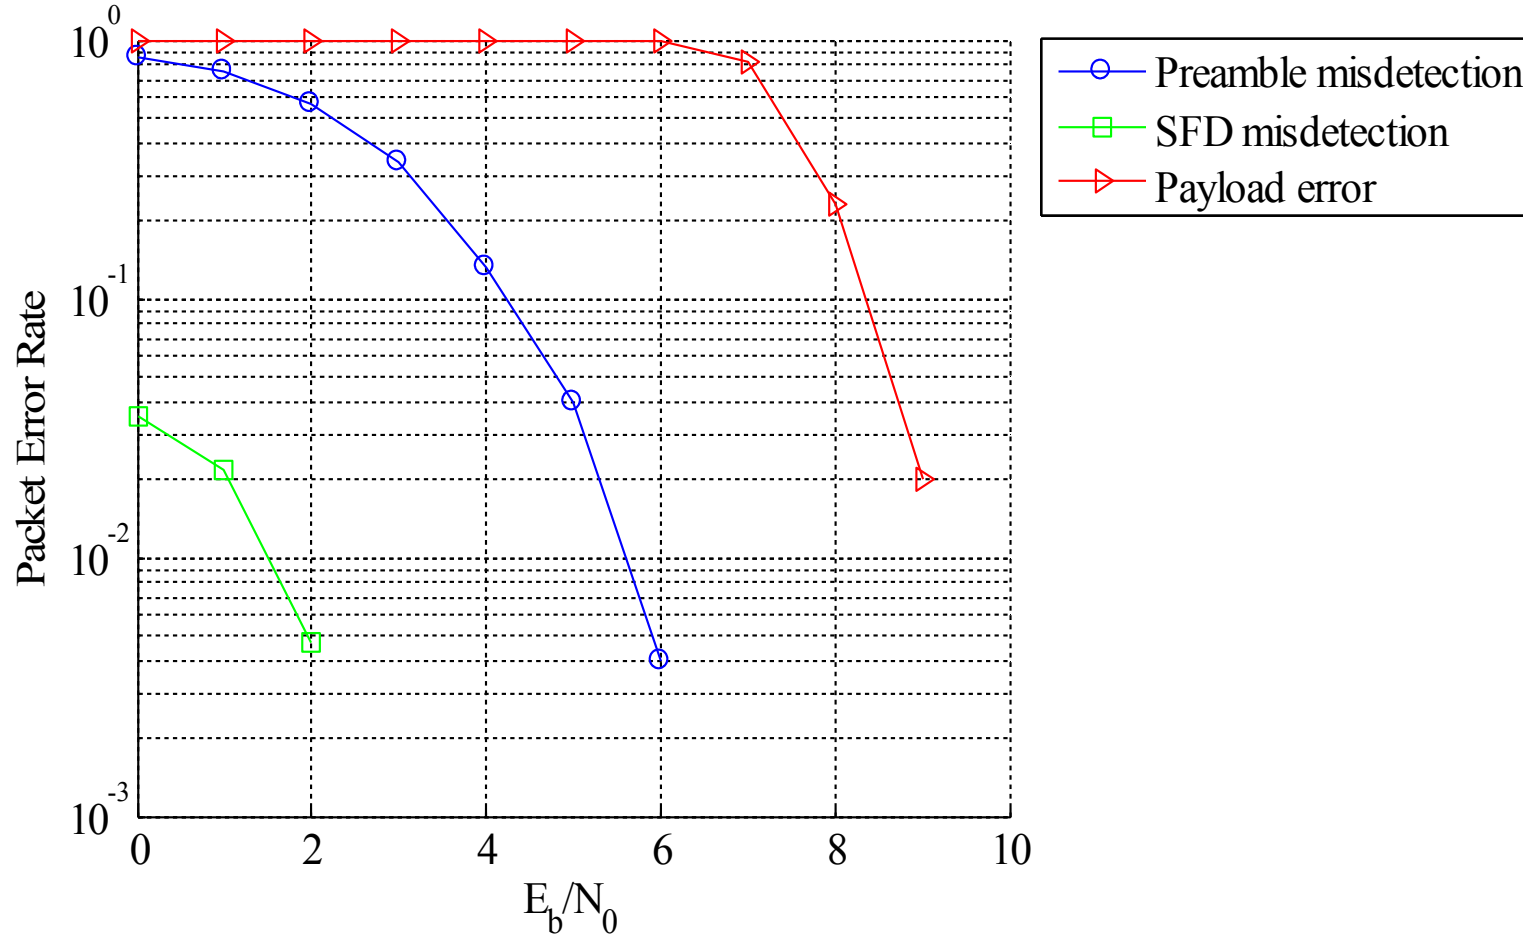

Simulated MAI traffic @ 432 Kbps

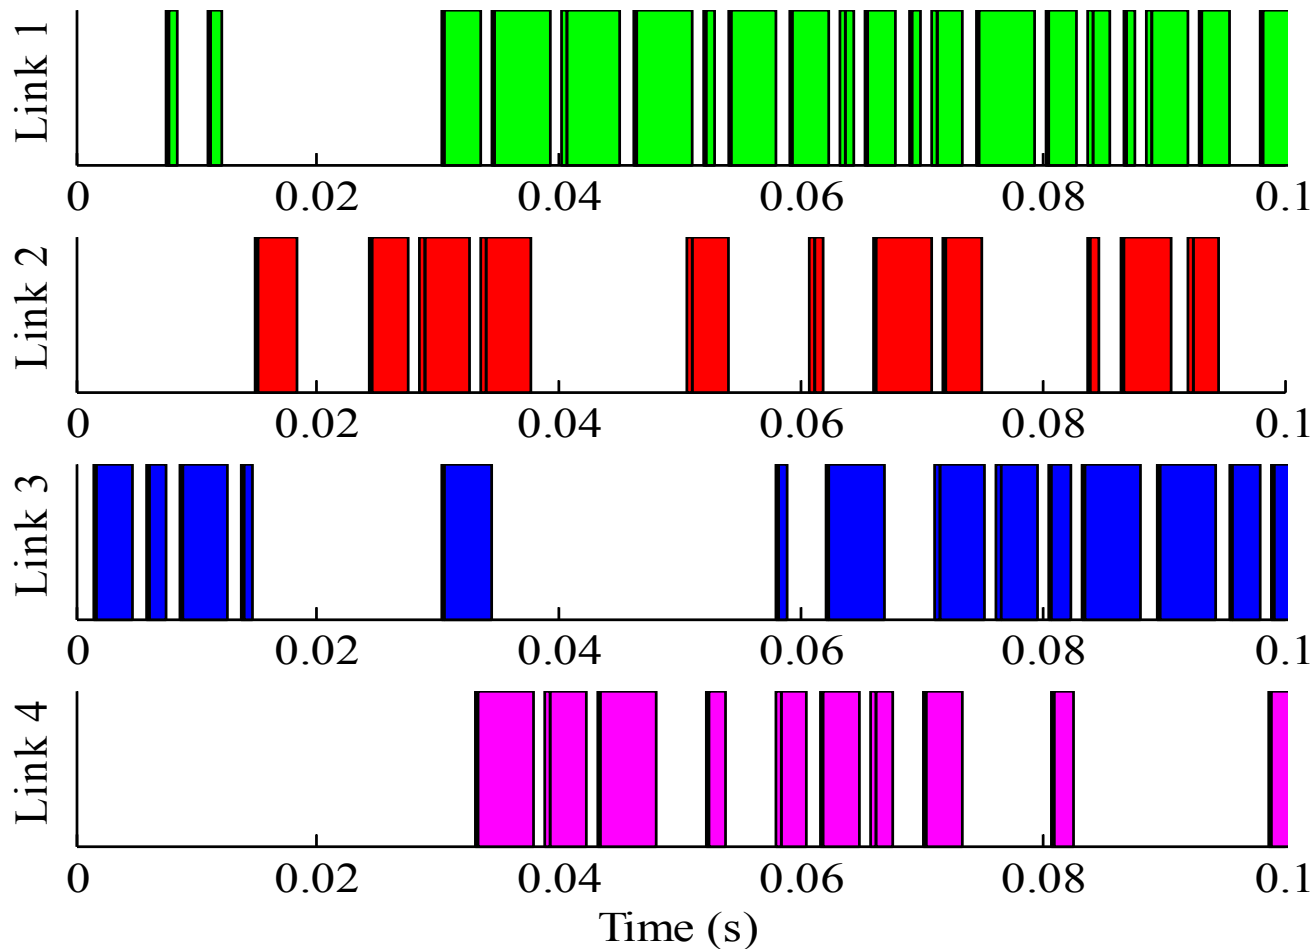


Performance in Multiple Access Interference @ 436 Kbps

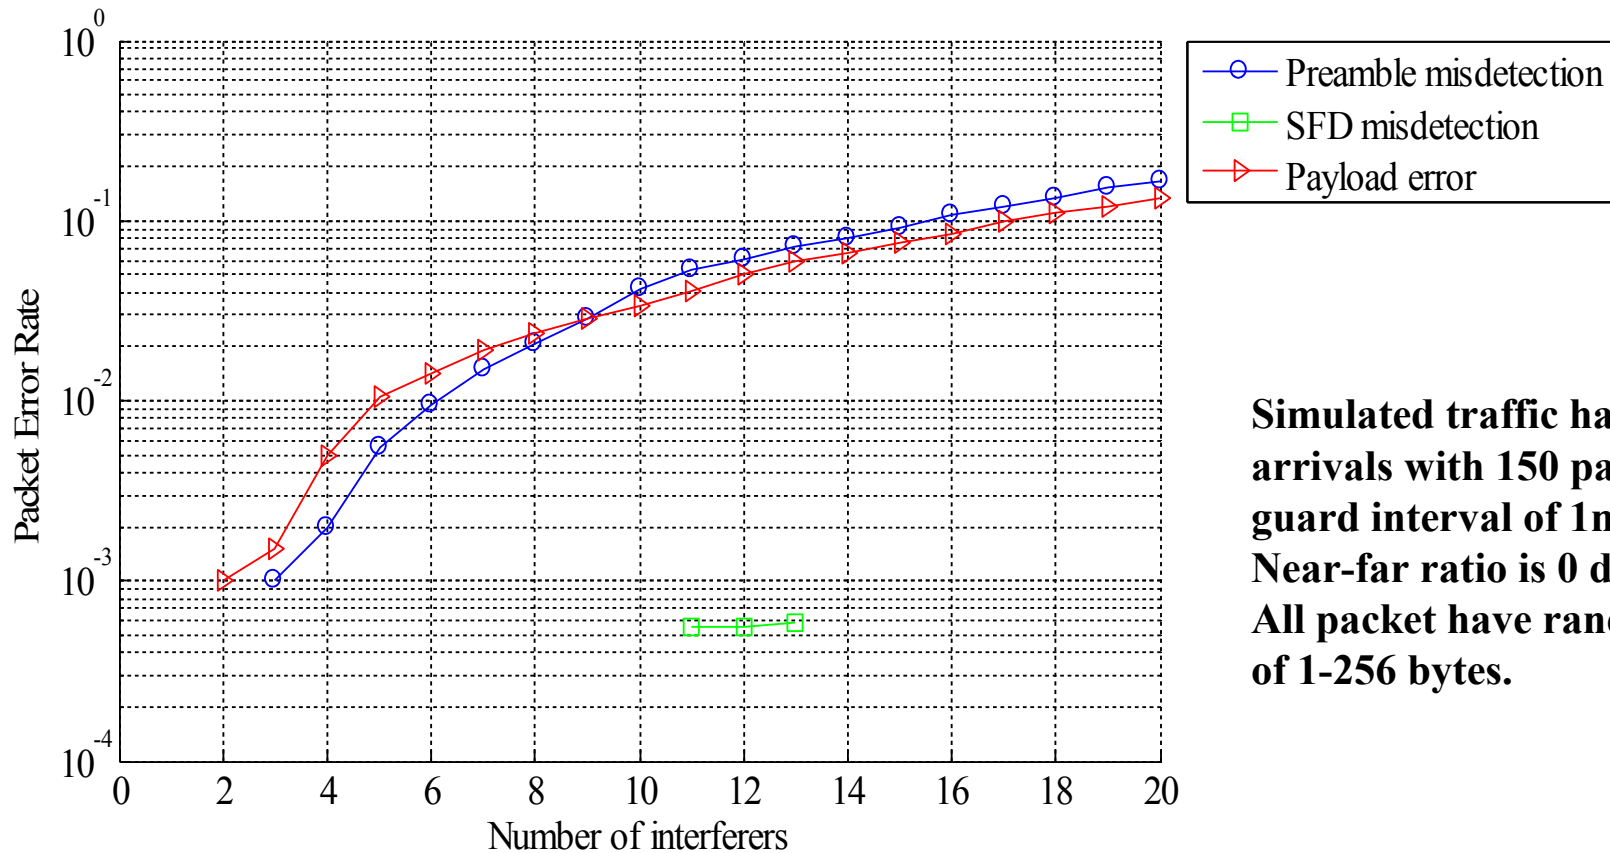

Simulated traffic has Poisson arrivals with 150 packs/s and guard interval of 1ms. Near-far ratio is 0 dB. All packet have random duration of 1-256 bytes.

Symmetrical Double-Sided Two-Way Ranging (SDS TWR)

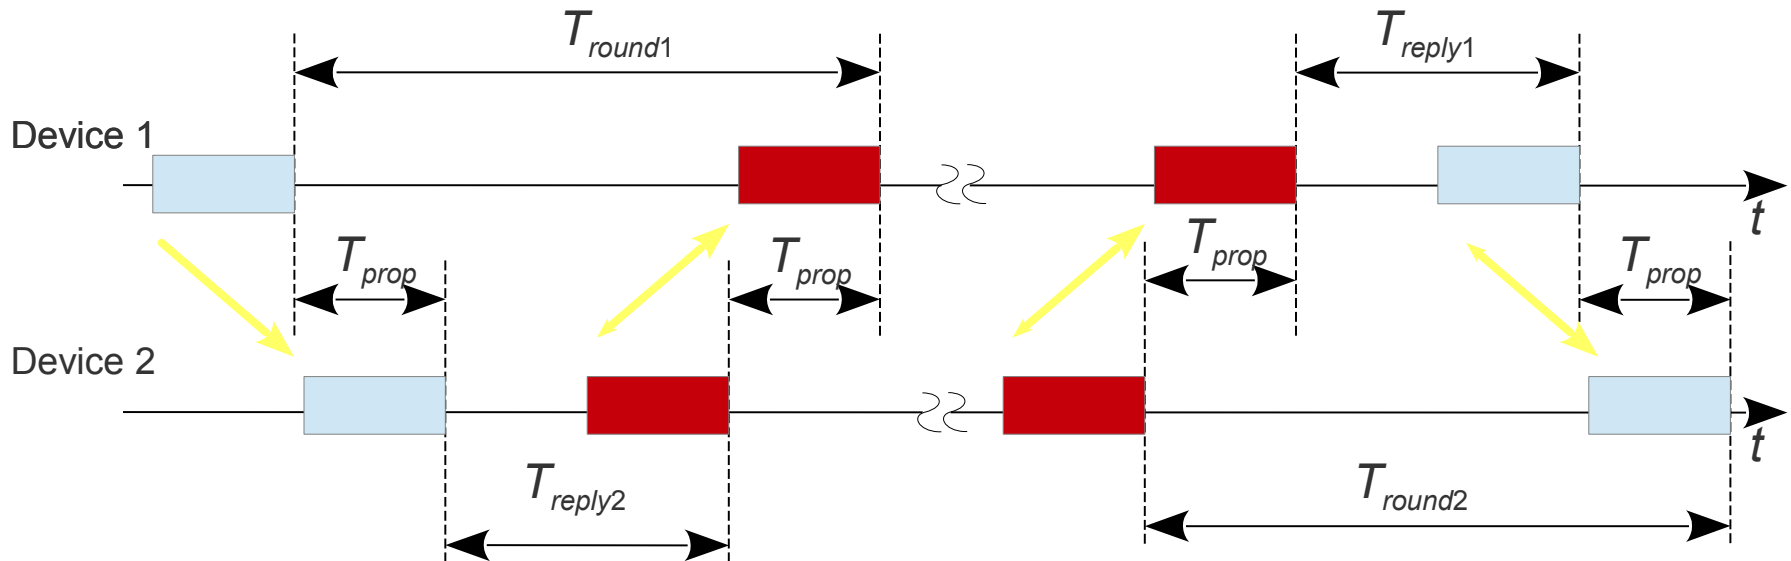

T_{round} ... round trip time

T_{reply} ... reply time

T_{prop} ... propagation of the packet

$$\hat{T}_{prop} = \frac{T_{round1} - T_{reply1} + T_{round2} - T_{reply2}}{4}$$

Effects of crystal timing inaccuracies on ranging

$$T_{round1} = T_{round} \times (1 + e_1)$$

$$T_{round2} = T_{round} \times (1 + e_2)$$

$$T_{reply1} = T_{reply} \times (1 + e_1)$$

$$T_{reply2} = T_{reply} \times (1 + e_2)$$

$$\hat{T}_{prop} = T_{prop} \left(1 + \frac{e_1 + e_2}{2} \right)$$

e_1, e_2 are typically 20 ppm

Link budget

Parameters								
Bandwidth (GHz)	1.25	3	1.25	3	1.25	3	1.25	3
Carrier frequency (GHz)	8	8	8	8	8	8	8	8
Tx power (dBm)	-11	-7.2	-11	-7.2	-11	-7.2	-11	-7.2
Distance (m)	10	30	30	100	100	150	100	250
Pathloss (dB)	70.5	80	80	90.5	90.5	94	90	96.5
Rx power (dBm)	-82.5	-87	-87	-97.7	-101.5	-101.3	-101.5	-103.7
NF (dB)	7	7	7	7	7	7	7	7
Imp. loss (dB)	3	3	3	3	3	3	3	3
G _{Tx} =G _{Rx} (dBi)	0	0	0	0	0	0	0	0
Data rate (Kbps)	432	432	219	219	109	109	54.5	54.5
Eb/N0 req. (dB)	10	10	10	10	10	10	10	10
Eb/N0 (dB)	26	20	19.5	12.9	12.1	12.4	15	12.9
Link margin (dB)	16	10	9.5	2.9	2.1	2.4	5	2.9
Sensitivity (dBm)	-97.6	-97.6	-100.6	-100.6	-103.6	-103.6	-106.6	-106.6

Conclusions

- IR-UWB PHY features
 - Low complexity
 - Low Tx power
 - Low data rate
 - Low power consumption
 - Low to medium range
 - High localization accuracy