

Project: IEEE P802.15 Interest Group for Wireless Personal Area Networks (WPANs)

Submission Title: PHY requirement considerations for high rate FSK

Date Submitted: April 2020

Source: Henk de Ruijter [Silicon Labs].

Contact: +1-512-428-1575

E-Mail: hendricus.deruijter@silabs.com

Re:

Abstract: Technical considerations for high rate FSK extension to the SUN-FSK PHY

Purpose: To discuss PHY requirements for high rate FSK.

Notice: This document has been prepared to assist the IEEE P802.15. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release: The contributor acknowledges and accepts that this contribution becomes the property of IEEE and may be made publicly available by P802.15.

Considerations on rate extension for SUN- FSK PHY


Introduction

- ❑ Higher data rates raises two concerns:
 1. The need for small modulation index to comply with bandwidth requirements. This may reduce the receive sensitivity.
 2. The higher data rates will also reduce receive sensitivity

- ❑ This contribution addresses these concerns.


Euclidian distance vs mod-index

- ❑ Squared Euclidian distance drops down below $h = 0.75$ [1]
- ❑ This will reduce the RX sensitivity
- ❑ Proposed mod index is 0.4 and 0.5 [2]

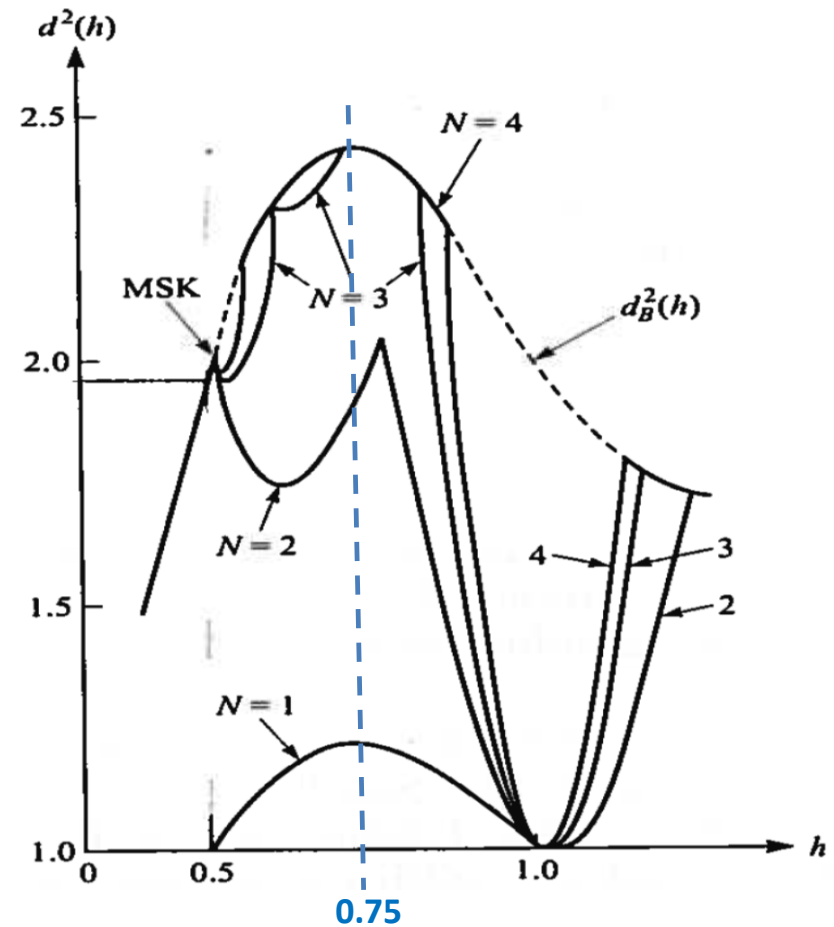


Frequency deviation tolerance

- ❑ In 802.15.4-2015 [3] the frequency deviation tolerance spec for 2-FSK is shown here.
- ❑ With the current frequency deviation tolerance spec the mod-index can be as low as $0.7 \times 0.4 = 0.28$. This would lead to a severe sensitivity impact.
- ❑ The receiver bandwidth needs to accommodate the 30% over-modulation which also impacts the receive sensitivity.
- ❑ A tighter modulation definition would benefit the worst case receive sensitivity.

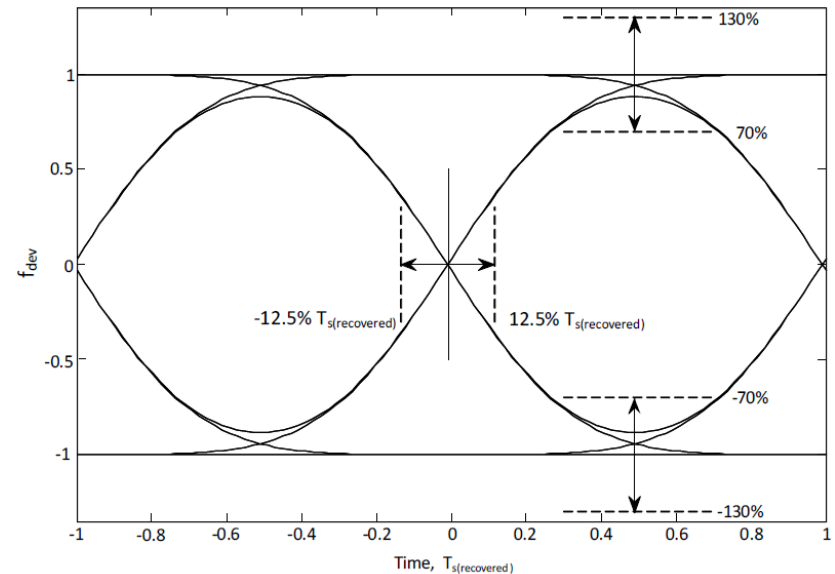


Proposal for modulation quality spec

- Gaussian shaping, $BT = 0.5$
- Measurement:
- Modulate with 111000111...
- Measure F1 at the center of the 111 and 000 sequence
- Spec:
 - $F1 = f_{\text{dev}} \pm 10\%$
- Modulate with 101010...
- Measure F2 at the center of a 1 and 0 symbol
- Spec:
 - $F2 = (0.88 \times F1) \pm 10\%$

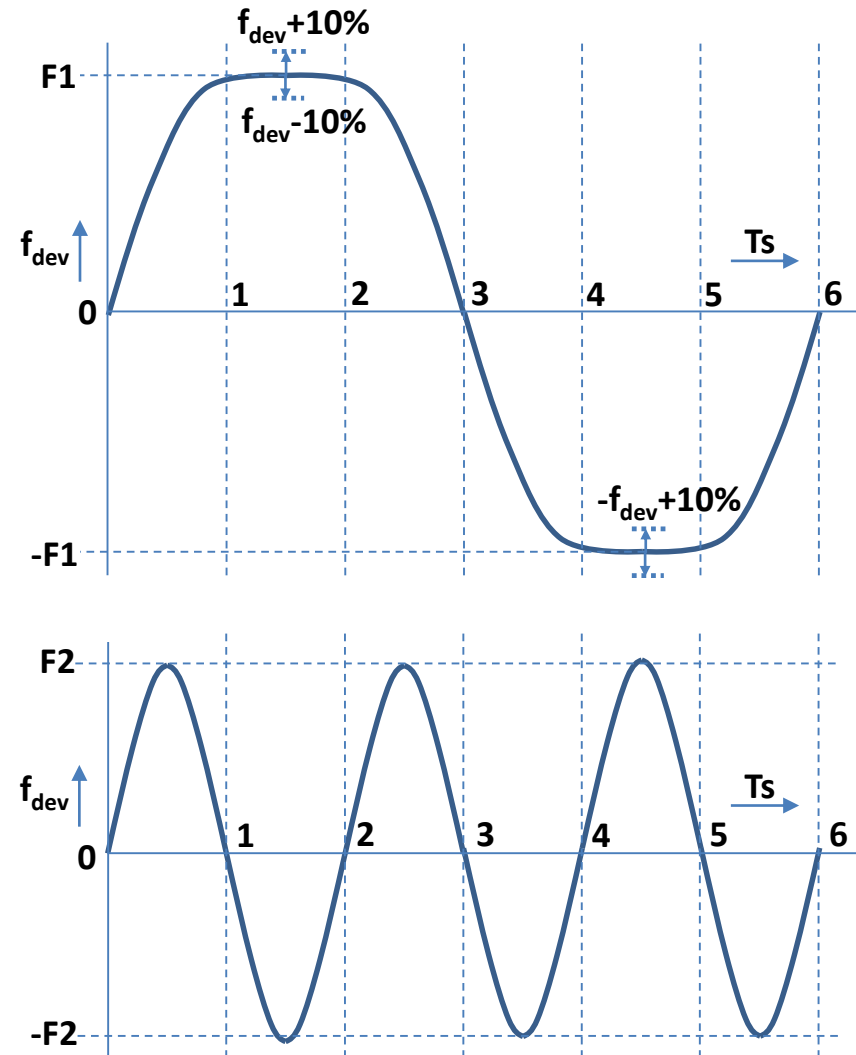

Adjacent channel emission requirements

- ARIB STD-T108 [4]
- Wi-SUN specifies 920 to 928 MHz
- Part 2 of STD-T108
- Max power for Part 2 = 20 mW = 13 dBm
- Spurious: “Except for $|f - f_c| \leq (200 + 100 \times n)$ kHz if bandwidth of unit radio channel is 200kHz
- Most stringent channel mask in Part 2 shown

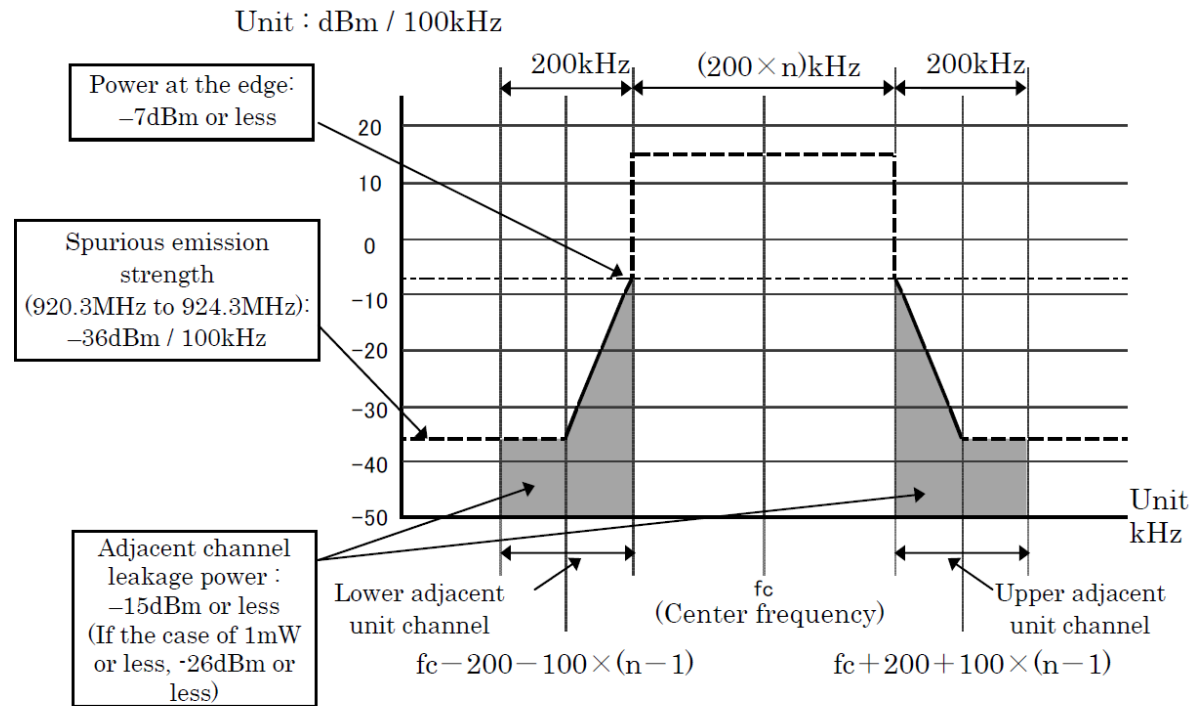

(Note: Center frequency is one of frequencies shown in Table 3.11 to Table 3.15 of 3.2.3 Radio channel and n is a number of unit radio channels constructing a radio channel.)

Adjacent Channel Leakage Power (ACLP) and spurious emission strength (SES)

Rb	h	BT	N	ACLP band	ACLP	SES band	SES	ACP@13	SES@13	Pmax
[kbps]				[kHz]	[dB]	[kHz]	[dB]	[dBm]	[dBm]	[dBm]
600	0.4	0.5	3	300-500	-24.64	500-600	-40.24	-11.64	-27.24	4.24
600	0.4	0.5	4	400-600	-36.64	600-700	-44.54	-23.64	-31.54	8.54
600	0.4	0.5	5	500-700	-38.85	700-800	-60.43	-25.85	-47.43	13
600	0.5	0.5	5	500-700	-35.15	700-800	-53.75	-22.15	-40.75	13
							limits	-15	-36	

Notes:

- Numbers need verification using TELEC-T245 measurement method.
- Higher modulation index is preferred.

References

- [1] Digital Communications by John G. Proakis.
- [2] IEEE 802.1-20-0009-02-wng by Harada, Okumura, Kashiwagi, Ikuta, Fukui, Jeng-Shiann and Kuramochi.
- [3] IEEE 802.15.4-2015
- [4] ARIB STD-T108 “920MHz-Band Telemeter, Telecontrol and Data Transmission Radio Equipment”