

Project: IEEE P802.15 Working Group for Wireless Personal Area Networks (WPANs)

Submission Title: Simulation and Automatic Planning of 300 GHz Backhaul Links - First Results from H2020-ThoR

Date Submitted: 16 September 2021

Source: Bo Kum Jung **Company:** TU Braunschweig, Institut für Nachrichtentechnik
Address: Schleinitzstr. 22, D-38092 Braunschweig, Germany

Voice: +495313912439 FAX: +495313915192, E-Mail: bokumjung@ifn.ing.tu-bs.de


Re: n/a

Abstract: This contribution presents an algorithm for automatic planning of 300 GHz backhaul/fromthaul links arranged in ring topology and using IEEE Std. 802.15.3d.

Purpose: Information of the Technical Advisory Group THz

Notice: This document has been prepared to assist the IEEE P802.15. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release: The contributor acknowledges and accepts that this contribution becomes the property of IEEE and may be made publicly available by P802.15.

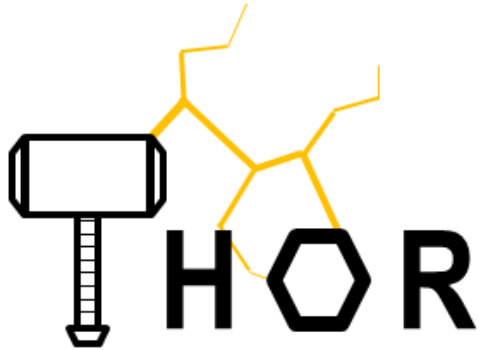

This project is co-funded by

Horizon 2020



National Institute of
Information and
Communications Technology

Automatic Planning Algorithm of 300 GHz Backhaul Links Using Ring Topology

Bo Kum Jung, Thomas Kürner, TU Braunschweig


This presentation is based on B. K. Jung and T. Kürner, "Automatic Planning Algorithm of 300 GHz Backhaul Links Using Ring Topology," *2021 15th European Conference on Antennas and Propagation (EuCAP)*, 2021, pp. 1-5, doi: 10.23919/EuCAP51087.2021.9411010.

Outline

1. Introduction
2. Planning Approach
3. Simulation Results
4. Conclusion




Introduction

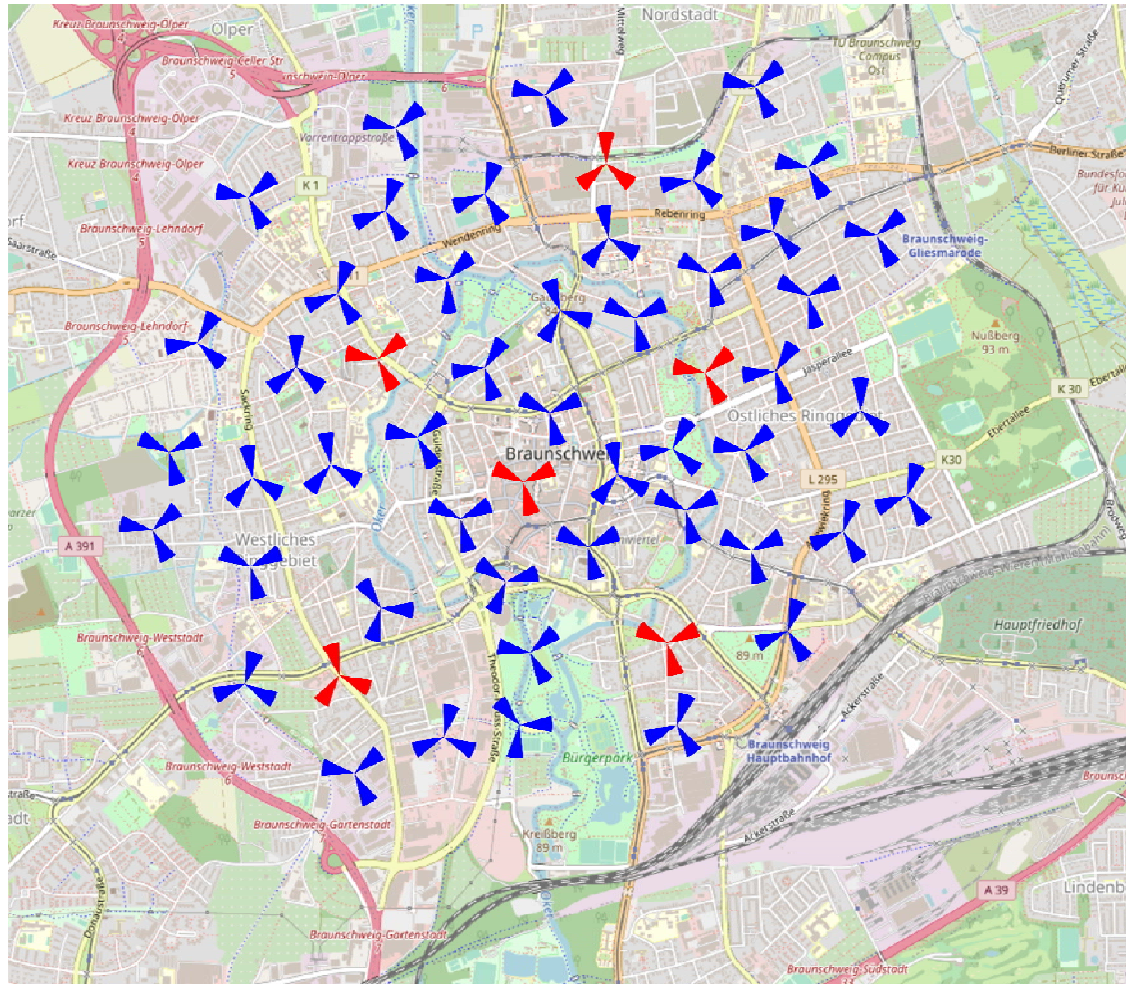

- Cable backhaul
 - Man's labour
 - Time & Cost intensive
 - Geographical limits
 - Poor maintenance performance
- Alternative
 - Wireless backhaul



Previous Planning Approach Based on Star Topology [1]

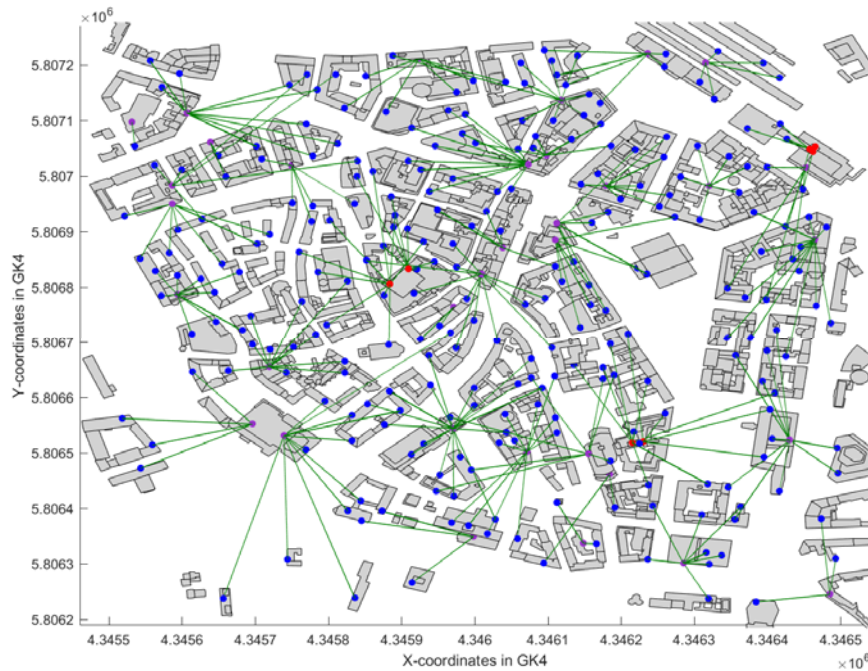

Star topology

- + easy to build up
- - lack of redundancy
 - fatal of link failure
- Alternative: **ring topology**


[1] B. K. Jung, N. Dreyer, J. M. Eckhardt and T. Kürner „Simulation and Automatic Planning of 300 GHz Backhaul Links“. IRMMW-THz, Paris, France, 2019.



Graphic Theoretical Basic of Ring Topology

- What is **clique**?

Clique in graphic theory is a **subset of vertices** of an undirected graph such that every two distinct vertices in the clique are adjacent

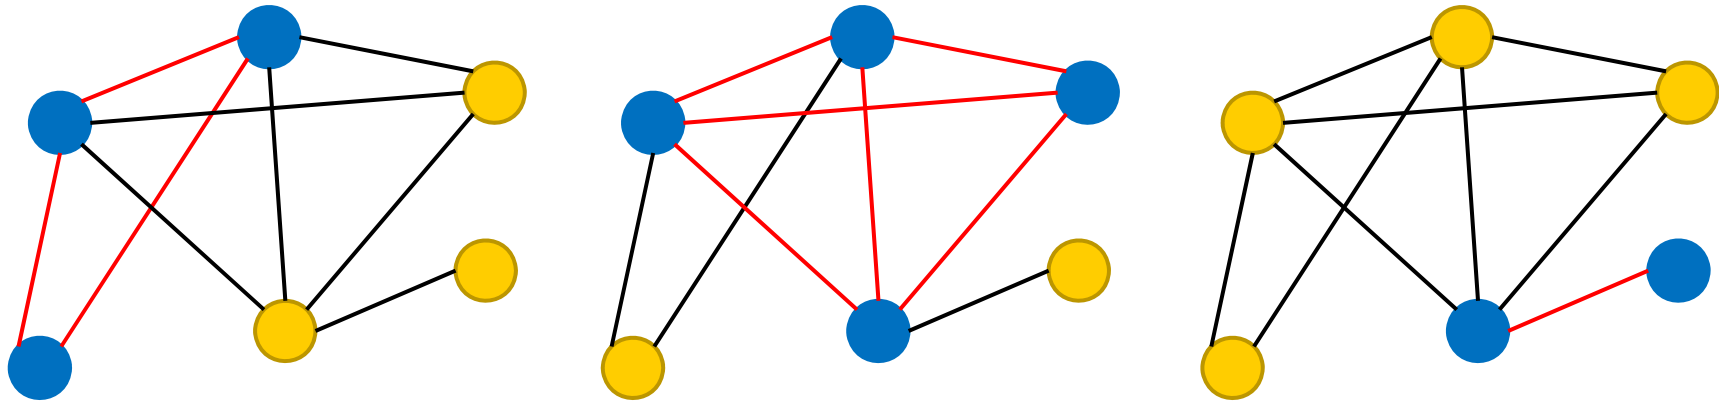


Planning Steps Determining Ring Topology

- Determine Neighbour list between cell sites
- Figure out possible cliques using Bron-Kerbosch algorithm
- Extend cliques
 - Clique-Extension done through number of cell sites $(1,2,3,\dots,n-2,n-1,n)$
 - Gather every cliques which contain vertex of number of cell site (m)
 - Gather every cliques which have clique number 2
 - Check combination of gathered cliques using Hamiltonian-cycle check
- Find possible combinations of cliques which cover all cell sites
- Determine exact path considering minimum angle of links and link distance



Example of Planning Steps of Ring Topology Based Network


Find combination

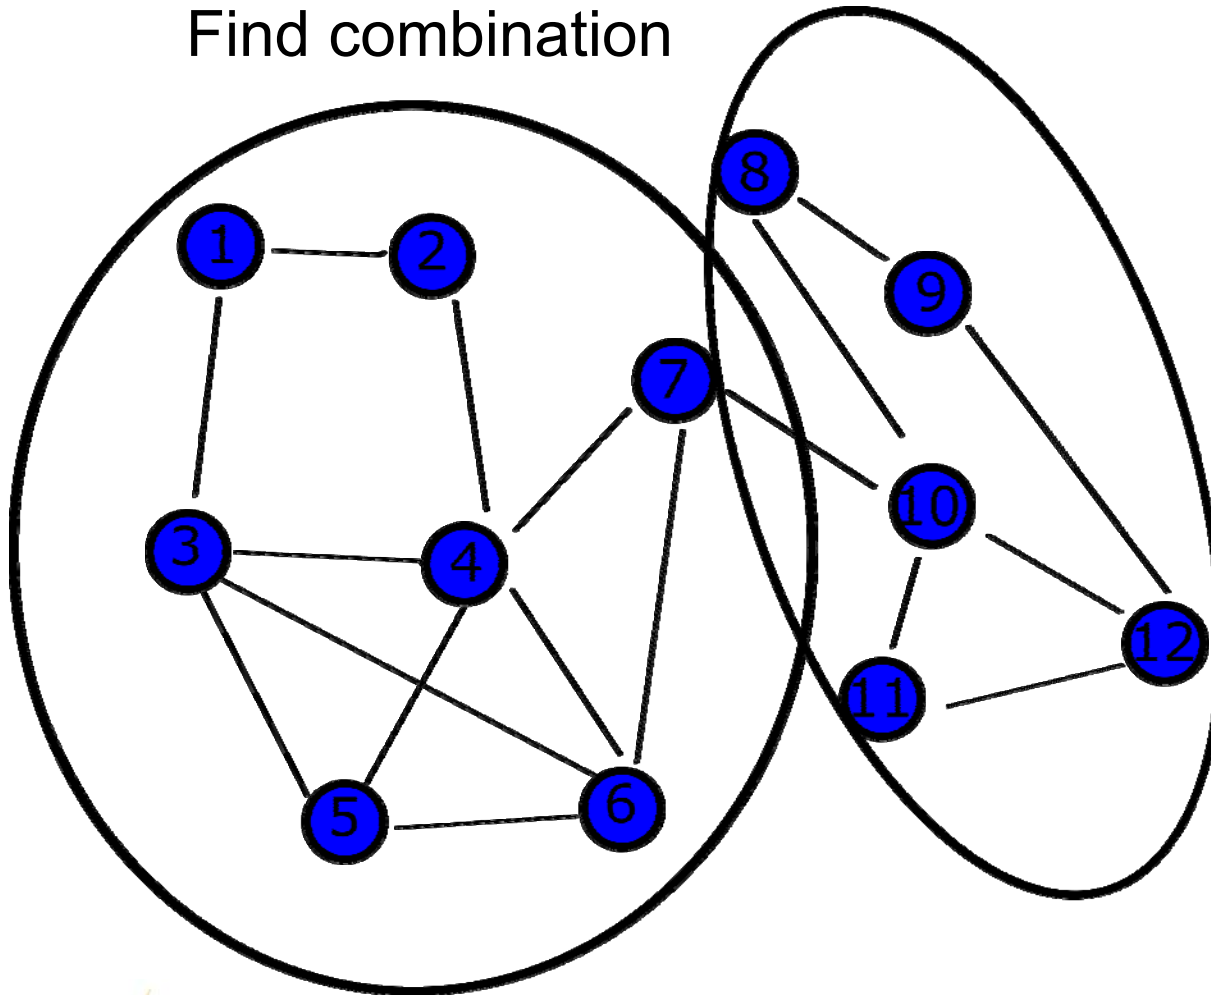

Clique is:




- 1,2,3,4,5,6,7
- 8,9,10,11,12
- 2,4
- 3,4,5,6
- 4,6,7
- 7,10
- 10,11,12
- 10,8
- 8,9
- 9,12
- 1,2,3,4
- 1,2,3,4,5,6,7
- 8,9,10,11,12

Simulation Scenario

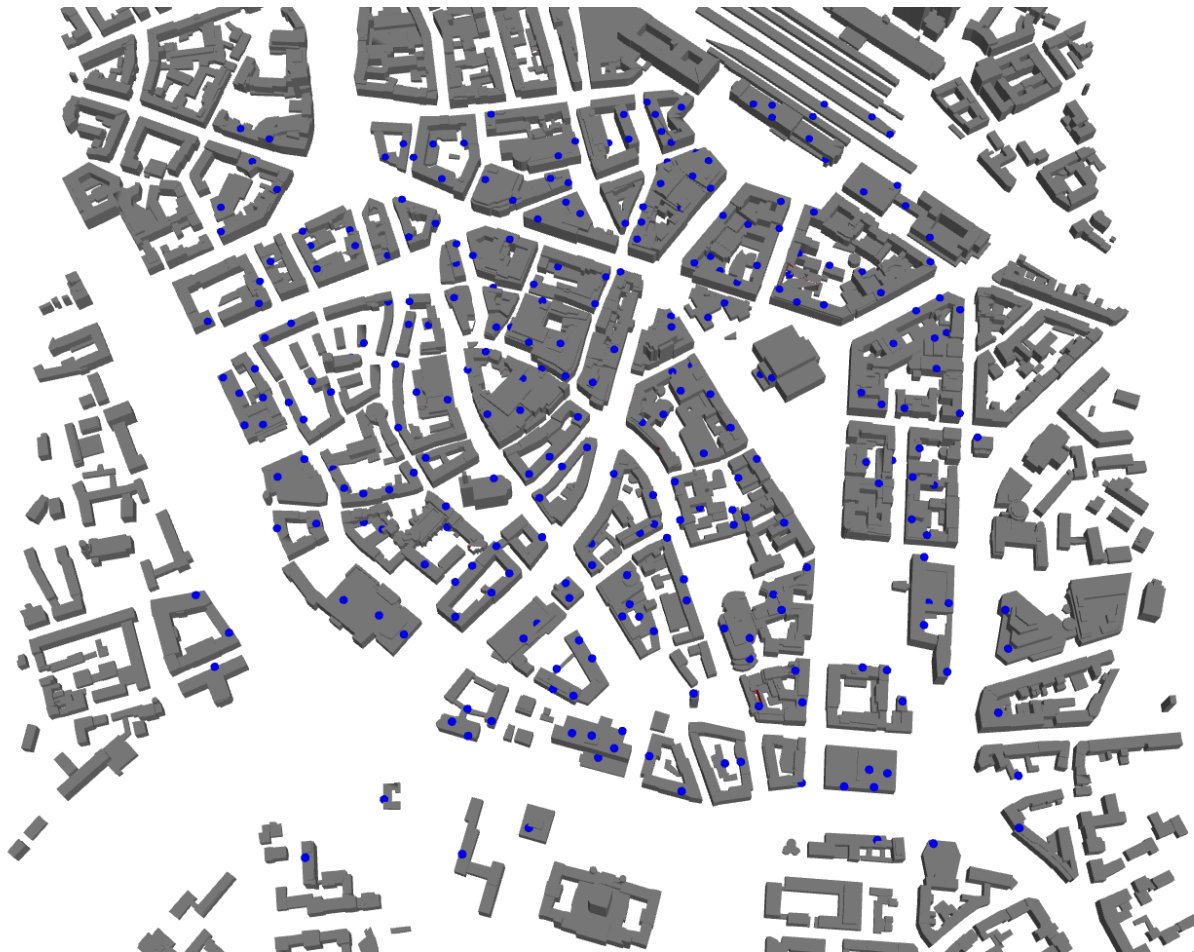

- Hannover scenario
 - High traffic region
 - 1km x 1km
 - **300** small cells
 - 1m antenna height
- Configuration parameter
 - 4° safety margin
 - 400 m link distance
 - 10 candidates
- Optimization factor
 - Reducing N of cable based backhaul

Simulation results

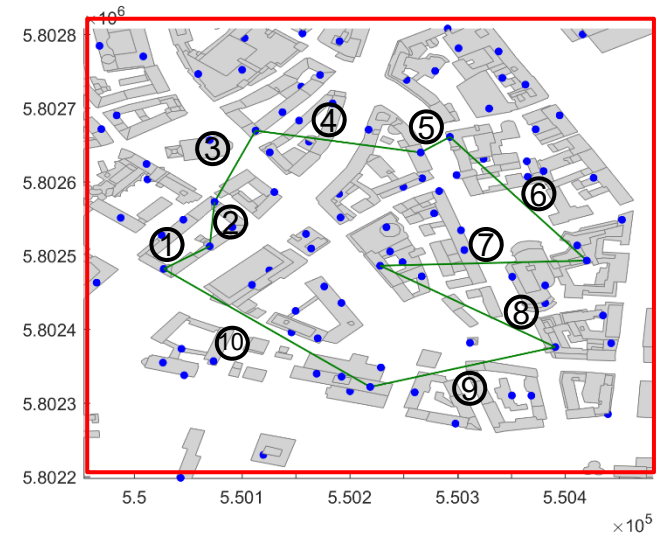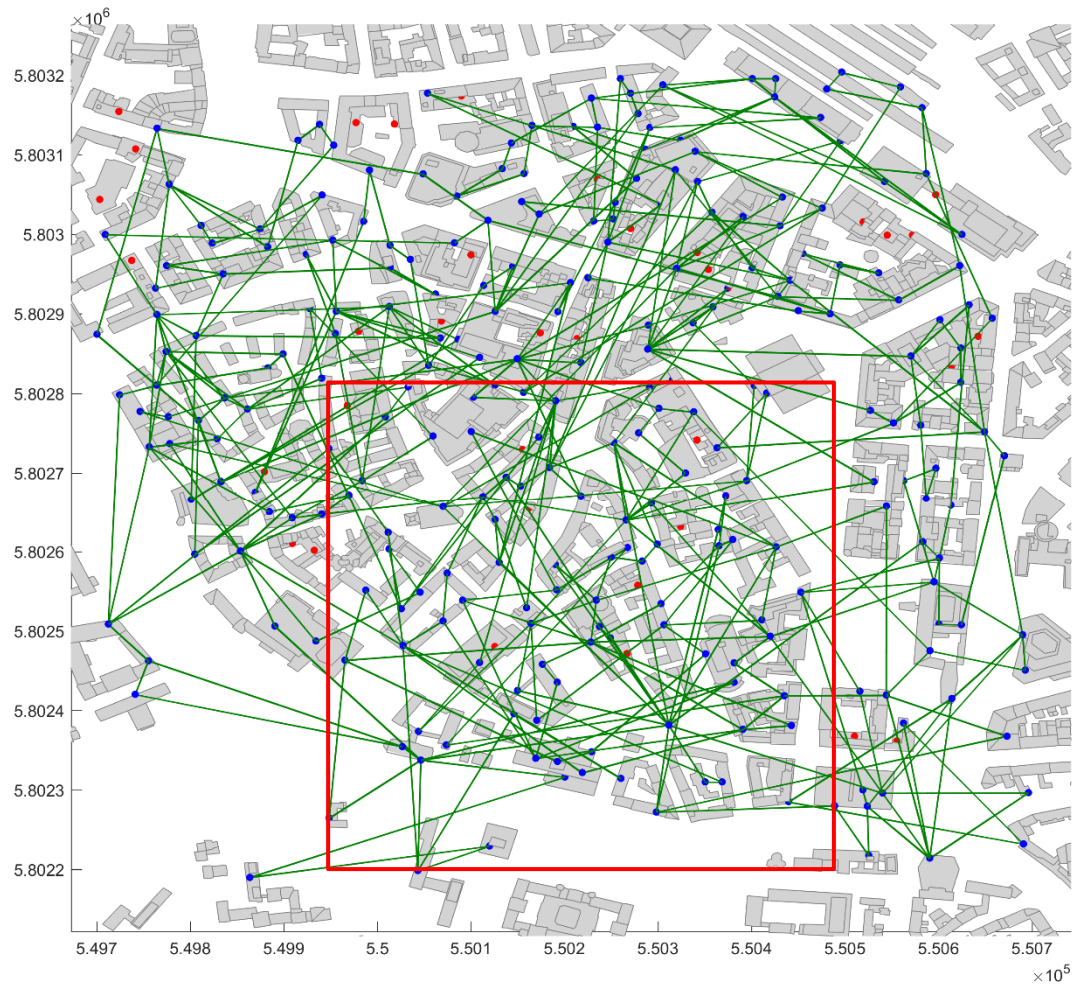


Simulation results

- **281** cell sites possible to apply ring concept
- **50** lists of cell sites combinations
- **410** wireless link required

| | Star | Ring |
|--------------------|------|---------|
| N of cable | 92 | Max 143 |
| N of Wireless Link | 208 | 410 |



Assessment of the Planning Results

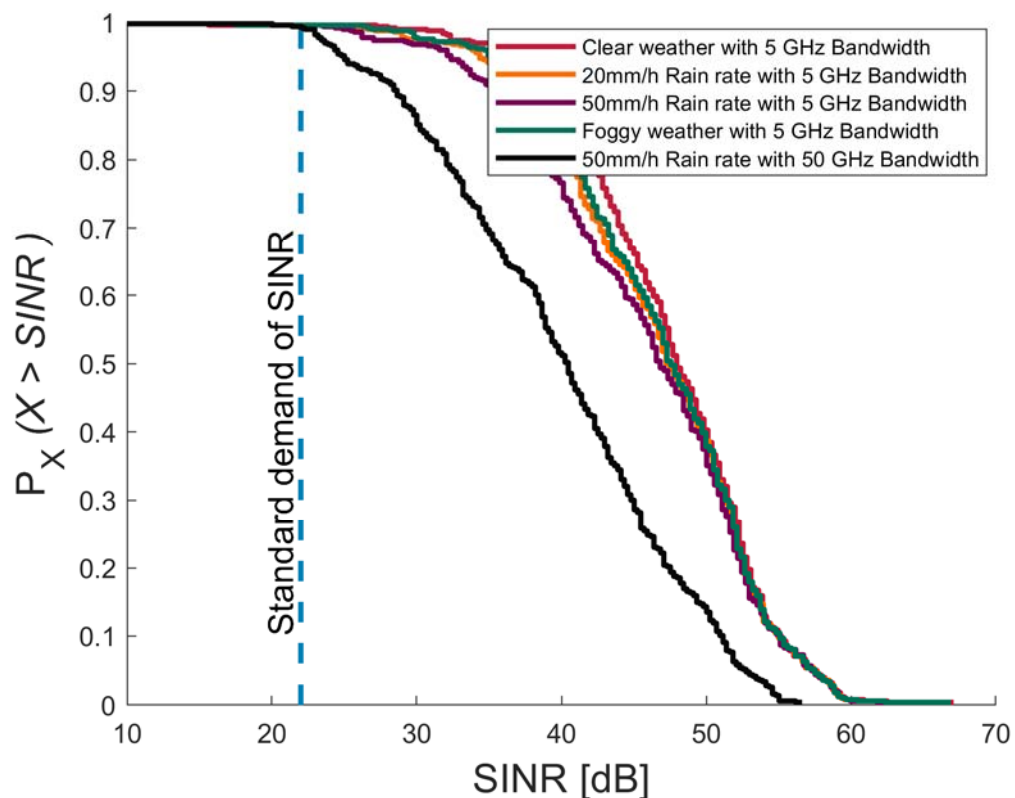

- Standard demand of SINR is the required SINR value to use highest modulation and coding scheme defined in IEEE standard
- ~99,4 % links with 5 GHz bandwidth exceed this value under any given weather conditions
- ~99 % links with 50 GHz bandwidth exceed this value under the heavy rain condition



Conclusion

- The given algorithm can plan wireless backhaul network automatically in ring shapes.
- More stable operation is guaranteed against link failure due to the redundant traffic paths.
- The highest modulation and coding scheme defined in IEEE is applicable on >99 % of the planned wireless backhaul links regardless of given weather conditions even using 50 GHz band width.
- ~73 % of backhaul links can be replaced by wireless connections instead of fibre connections



Thank you for your attention!

ご清聴ありがとうございました



Bo Kum Jung, M.Sc.

TU Braunschweig

bokumjung@ifn.ing.tu-bs.de

This project has received funding from Horizon 2020, the European Union's Framework Programme for Research and Innovation, under grant agreement No. 814523. ThoR has also received funding from the National Institute of Information and Communications Technology in Japan (NICT).

